


NOTES :


- 1) MATERIAL :
 HOUSING : HIGH TEMPERATURE LIQUID CRYSTAL POLYMER, UL94V-0
 COLOUR : BLACK
 CONTACTS : COPPER ALLOY
 LATCHES : HIGH TEMPERATURE NYLON, UL94V-0
 COLOUR : NATURAL (OFF-WHITE)
- 2) FINISH :
 CONTACT AREA : 0.76 MICROMETER (30 MICROINCH) MIN GOLD OVER
 1.25 MICROMETER (50 MICROINCH) MIN NICKEL
 SOLDER LEADS : 2.54 MICROMETER (100 MICROINCH) MIN TIN OVER
 1.25 MICROMETER (50 MICROINCH) MIN NICKEL
- 3) ACCEPTS 1.0 mm THICK MEMORY MODULE PER JEDEC MO-244 FOR 244 CKTS AND MO-258 FOR 200 CKTS.
- 4) PRODUCT SPECIFICATION : PS-87918-001
- 5) PACKAGING SPECIFICATION: PRODUCT SHALL BE PACKED IN TRAY. SEE TABLE ON SHEET 4.

6) DATE CODE SHALL BE MARKED LEGIBLY AS SHOWN :YYDDD
 7) PART NUMBER SHALL BE MARKED LEGIBLY AS SHOWN. 87918-XXXX(REFER TO TABLE)

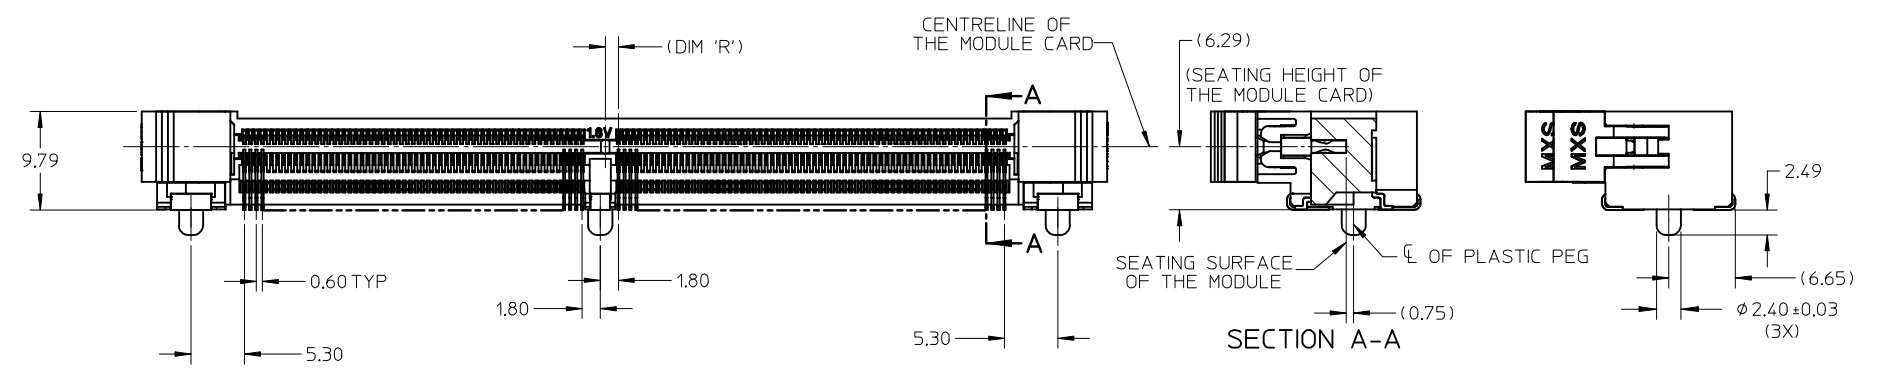

ADD PART NUMBER EC NO: S2014-0858 DRWN: JAKEEWEW 2013/12/26 CHKD: CCTEH 2014/03/19 APPR: SHLENI 2014/03/20	QUALITY SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_F = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		4 PLACES \pm --- \pm ---	mm INCH	DRAWN BY EDMUND	DATE 2004/08/17	TITLE MINI DIMM, 0.60MM PITCH 244/200 CKTS STANDARD R/A				
		3 PLACES \pm --- \pm ---		CHECKED BY SRRAMESH	DATE 2005/01/25	molex				
		2 PLACES \pm 0.13 \pm ---		APPROVED BY GGLEE	DATE 2005/01/25					
1 PLACE \pm 0.25 \pm ---		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87918-001		SHEET NO. 1 OF 4				
0 PLACE \pm \pm		ANGULAR \pm 1 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										

10 9 8 7 6 5 4 3 2 1

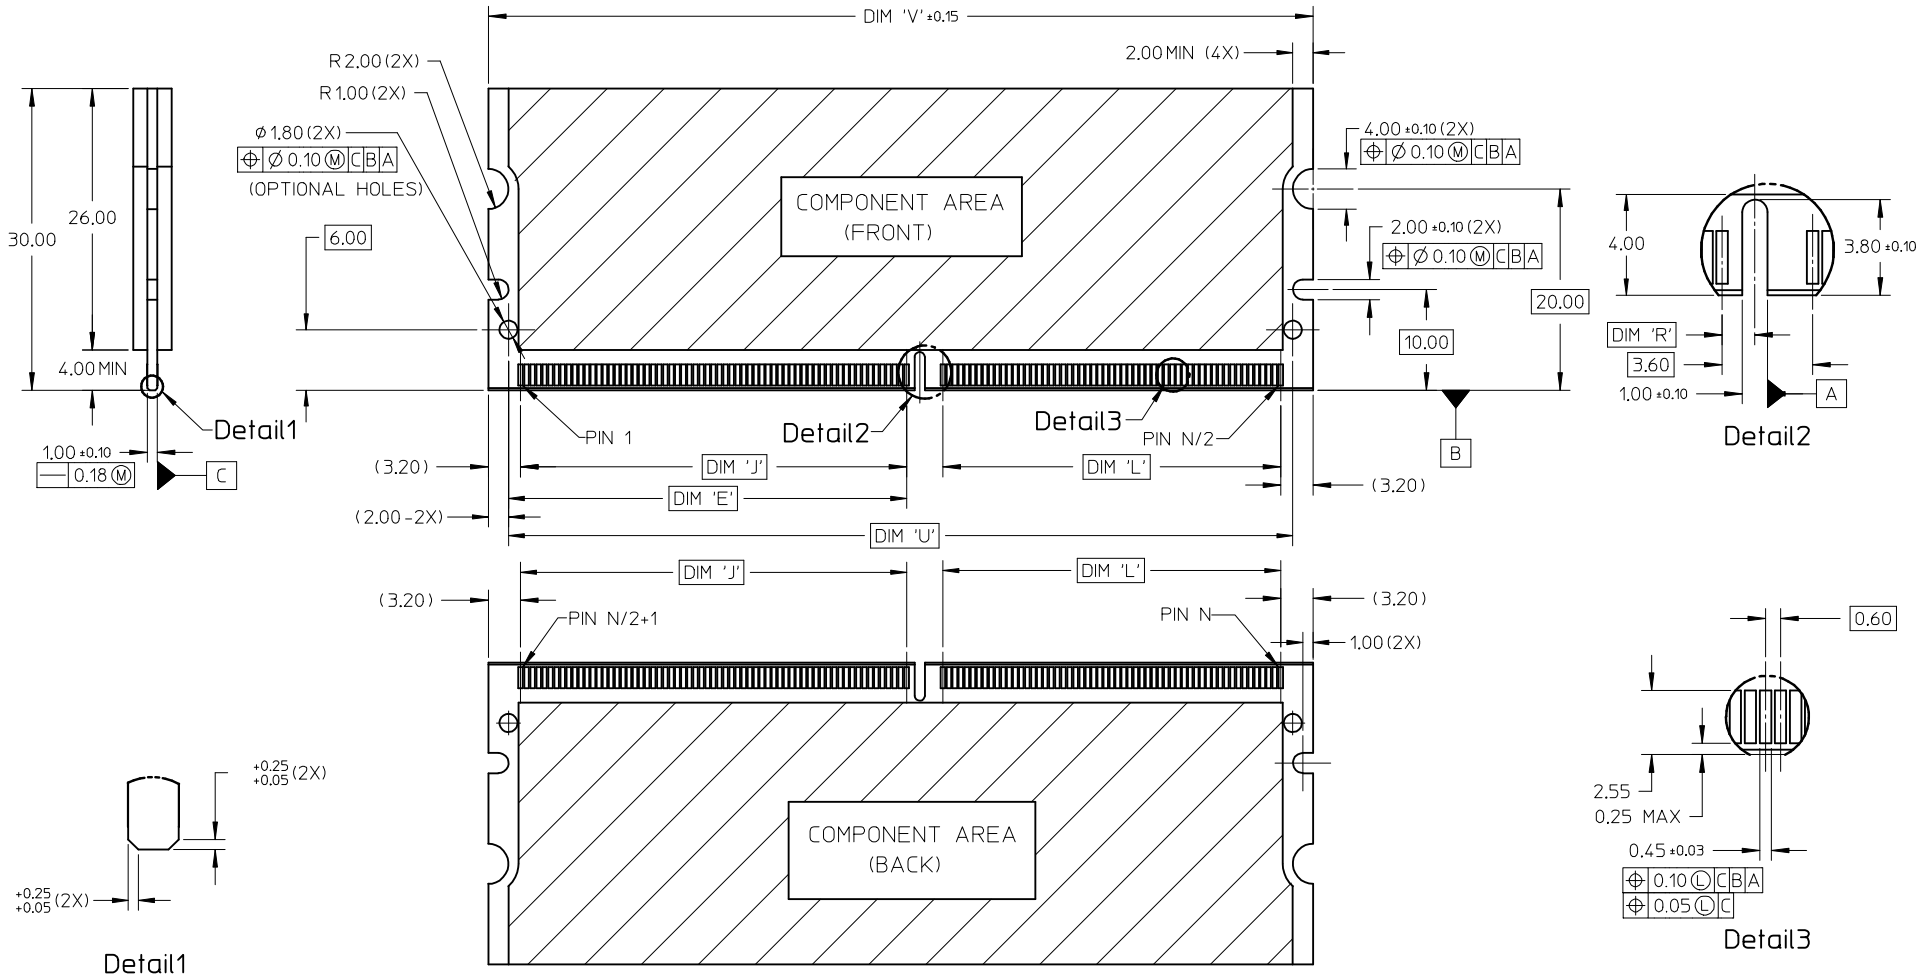


F
E
D
C
B
A


F
E
D
C
B
A

ADD PART NUMBER EC NO: S2014-0858 DRWN: JAKEEWEW 2013/12/26 CHKD: CCTEH 2014/03/19 APPR: SILENI 2014/03/20 B4	QUALITY SYMBOLS $F_A=0$ $F_G=0$ $F_P=0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- 0 PLACE ± ±	mm INCH ± --- ± --- ± 0.13 ± --- ± 0.25 ± --- ± ±	DRAWN BY EDMUND	DATE 2004/08/17	TITLE MINI DIMM, 0.60MM PITCH 244/200 CKTS STANDARD R/A molex			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHECKED BY SRRAMESH	DATE 2005/01/25	DOCUMENT NO. SD-87918-001			
				APPROVED BY GGLEE	DATE 2005/01/25	SHEET NO. 2 OF 4			

9 8 7 6 5 4 3 2 1

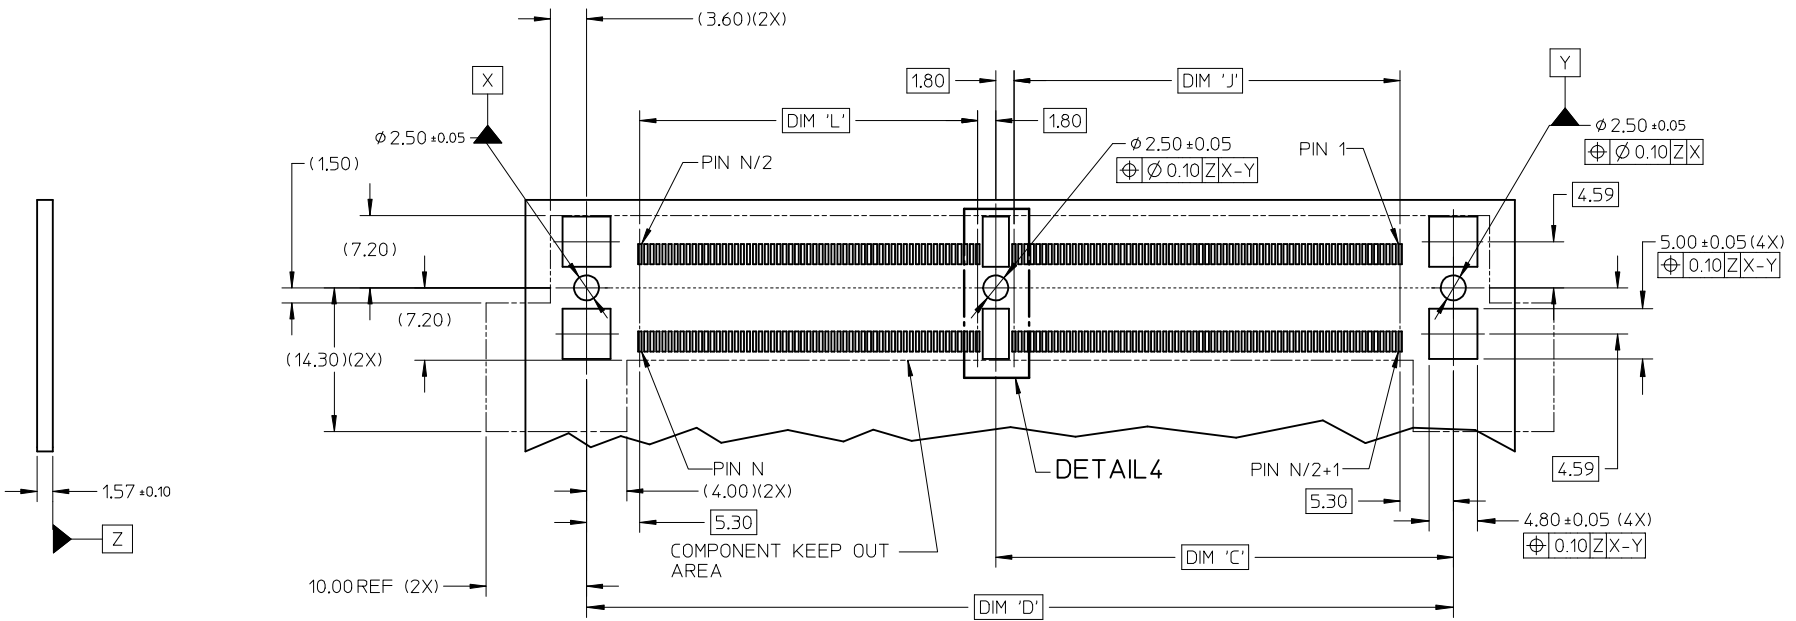

RECOMMENDED PCB LAYOUT

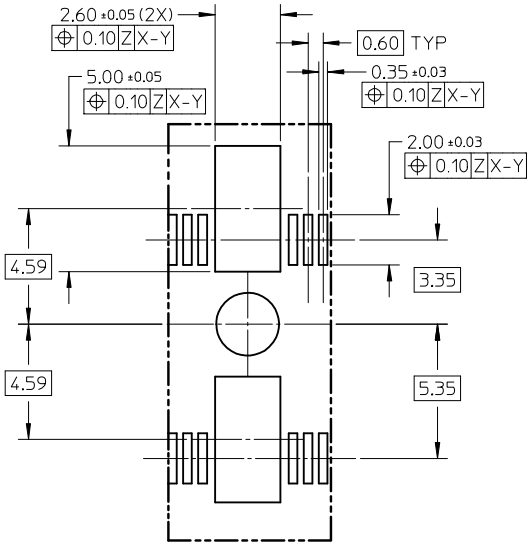

DETAIL 4

ADD PART NUMBER EC NO: S2014-0858 DRWN: JAKEWEW 2013/12/26 CHKD: CCTEH 2014/03/19 APPR: SILENI 2014/03/20 REV B4	QUALITY SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_P = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>\pm ---</td> <td>\pm ---</td> </tr> <tr> <td>3 PLACES</td> <td>\pm ---</td> <td>\pm ---</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.13</td> <td>\pm ---</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>\pm ---</td> </tr> <tr> <td>0 PLACE</td> <td>\pm</td> <td>\pm</td> </tr> </table>		mm	INCH	4 PLACES	\pm ---	\pm ---	3 PLACES	\pm ---	\pm ---	2 PLACES	± 0.13	\pm ---	1 PLACE	± 0.25	\pm ---	0 PLACE	\pm	\pm	DIMENSION STYLE MM ONLY DRAWN BY: EDMUND DATE: 2004/08/17 CHECKED BY: SRRAMESH DATE: 2005/01/25 APPROVED BY: GGLEE DATE: 2005/01/25 MATERIAL NO. SEE TABLE	SCALE NTS TITLE MINI DIMM, 0.60MM PITCH 244/200 CKTS STANDARD R/A molex DOCUMENT NO. SD-87918-001	DESIGN UNITS METRIC THIRD ANGLE PROJECTION	SHEET NO. 3 OF 4
		mm	INCH																					
	4 PLACES	\pm ---	\pm ---																					
	3 PLACES	\pm ---	\pm ---																					
	2 PLACES	± 0.13	\pm ---																					
1 PLACE	± 0.25	\pm ---																						
0 PLACE	\pm	\pm																						
	ANGULAR $\pm 1^\circ$ DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																						

F

F

E

E

D

D

C

C

B

B

A

A

PART NUMBER	CKT SIZE 'N'	MODULE CARD	VOLTAGE KEY	DIM 'R'	DIM 'E'	DIM 'J'	DIM 'L'	DIM 'A'	DIM 'S'	DIM 'T'	DIM 'U'	DIM 'V'	DIM 'C'	DIM 'D'	DIM 'B'	PACKAGING SPECIFICATION
87918-0001	244	DDR2	1.8 V	1.30	39.60	38.40	33.60	93.0	96.0	106.2	78.00	82.00	45.50	86.20	75.60	PK-87918-002
87918-0301		DDR3	1.5 V	2.30												
87918-0201	200	DDR2	1.8 V	1.30	24.60	23.40	35.40	79.8	82.8	93.0	64.80	68.80	30.50	73.00	62.40	PK-87918-001
87918-0202		DDR	2.5 V	2.30												
87918-0009	244	DDR2	1.8 V	1.30	39.60	38.40	33.60	93.0	96.0	106.2	78.00	82.00	45.50	86.20	75.60	PK-87918-005
87918-0302		DDR3	1.5 V	2.30												

ADD PART NUMBER EC NO: S2014-0858 DRWN: JAKEEWEH 2013/12/26 CH'KD: CCTEH 2014/03/19 APPR: SHELNI 2014/03/20	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
	$\nabla_F = 0$	4 PLACES	mm INCH	MM ONLY	NTS	METRIC	MINI DIMM, 0.60MM PITCH		
	$\nabla_G = 0$	3 PLACES	\pm --- \pm ---	DRAWN BY DATE	CHECKED BY DATE	TITLE			
	$\nabla_H = 0$	2 PLACES	\pm 0.13 \pm ---	EDMUND 2004/08/17	SRRAMESH 2005/01/25	244/200 CKTS			
	1 PLACE	\pm 0.25 \pm ---	APPROVED BY DATE	GGLLEE 2005/01/25		STANDARD R/A			
	0 PLACE	\pm \pm	MATERIAL NO.	SEE TABLE		DOCUMENT NO.		SHEET NO.	
	ANGULAR \pm 1 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SD-87918-001		4 OF 4		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								