

# Surface Mount Bandpass Filter

## BPF-F598+

50Ω 410 to 785 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HP1156

### The Big Deal

- Broad bandwidth
- High Rejection
- Good VSWR
- Miniature shielded package

### Product Overview

BPF-F598+ is a 50Ω bandpass filter in a shielded package fabricated using SMT technology. This bandpass filter covers from 410 to 785 MHz.

### Key Features

| Feature            | Advantages   |
|--------------------|--|
| Low insertion loss | Can be used in digital cable TV networks and 4G LTE networks.                                    |
| Good rejection     | This enables the filter attenuate spurious signals and reject harmonics for broad frequency band |
| Shielded package   | The small surface mount package enables the BPF-F598+ to used in compact design                  |

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

## BPF-F598+

50Ω 410 to 785 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HP1156

### Features

- Broad bandwidth
- Sharper cut-off
- Miniature shielded package

### Applications

- Digital television
- Broad band wireless 4G LTE band
- Biomedical telemetry devise
- Wireless microphone

### Electrical Specifications at 25°C


| Parameter        |                  | F#    | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|------------------|------------------|-------|-----------------|------|------|------|------|
| Pass Band        | Center Frequency | —     | —               | —    | 598  | —    | MHz  |
|                  | Insertion Loss   | F1-F2 | 410-785         | —    | 2.70 | 4.50 | dB   |
|                  | VSWR             | F1-F2 | 410-785         | —    | 1.46 | 1.92 | :1   |
| Stop Band, Lower | Insertion Loss   | DC-F3 | DC-385          | 20   | 34   | —    | dB   |
|                  | VSWR             | DC-F3 | DC-385          | —    | 20   | —    | :1   |
| Stop Band, Upper | Insertion Loss   | F4-F5 | 825-1600        | 20   | 35   | —    | dB   |
|                  | VSWR             | F4-F5 | 825-1600        | —    | 20   | —    | :1   |

### Maximum Ratings


|                       |                |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C  |
| Storage Temperature   | -55°C to 100°C |
| RF Power Input        | 1 W            |

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

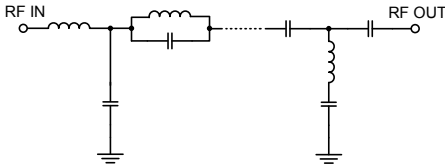

### Typical Frequency Response




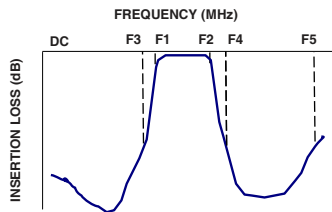


### Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | VSWR (:1) | Frequency (MHz) | Group Delay (nsec) |
|-----------------|---------------------|-----------|-----------------|--------------------|
| 1               | 102.77              | 347.44    | 410             | 15.16              |
| 250             | 37.70               | 42.38     | 414             | 12.74              |
| 315             | 62.49               | 38.61     | 418             | 10.96              |
| 355             | 37.20               | 23.49     | 420             | 9.75               |
| 372             | 50.61               | 15.96     | 430             | 8.39               |
| 385             | 39.05               | 9.79      | 440             | 6.98               |
| 387             | 31.54               | 8.68      | 450             | 5.89               |
| 390             | 21.83               | 6.73      | 460             | 5.20               |
| 394             | 11.72               | 3.82      | 480             | 4.38               |
| 402             | 3.21                | 1.20      | 500             | 3.87               |
| 410             | 1.99                | 1.16      | 598             | 3.14               |
| 598             | 0.76                | 1.26      | 650             | 3.36               |
| 785             | 2.63                | 1.18      | 700             | 4.04               |
| 789             | 3.04                | 1.15      | 720             | 4.60               |
| 806             | 11.84               | 3.96      | 740             | 5.46               |
| 813             | 20.05               | 6.39      | 760             | 6.93               |
| 820             | 30.25               | 8.60      | 770             | 7.94               |
| 825             | 39.25               | 9.96      | 775             | 8.42               |
| 1015            | 44.24               | 54.29     | 780             | 10.27              |
| 1600            | 48.03               | 193.02    | 785             | 11.95              |

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

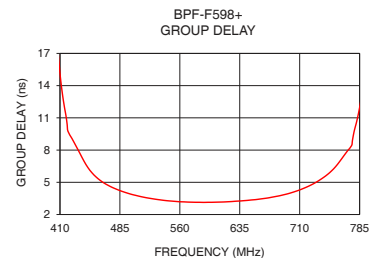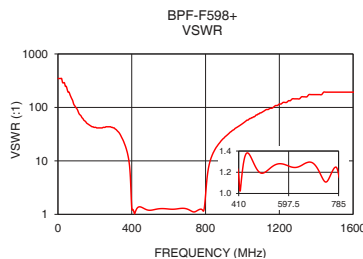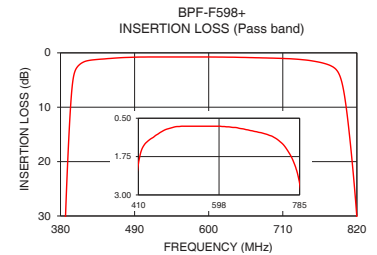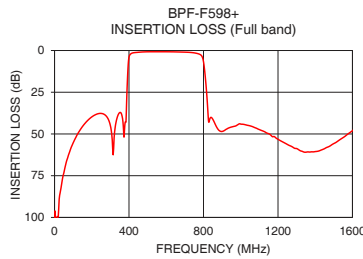

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.B  
M174392  
BPF-F598+  
EDU1801  
URJ  
190909  
Page 2 of 3

## Pad Connections

|               |                                    |
|---------------|------------------------------------|
| INPUT         | 2                                  |
| OUTPUT        | 11                                 |
| GROUND        | 1,3,4,5,6,7,8,10,12,13,14,15,16,17 |
| NO CONNECTION | 9,18                               |


**Demo Board MCL P/N: TB-695+**  
**Suggested PCB Layout (PL-418)**

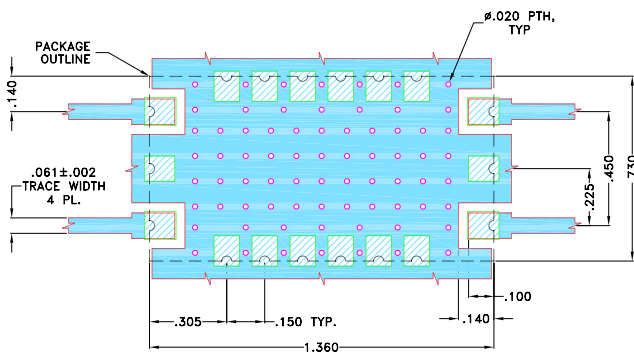

### NOTES:

- TRACE WIDTH IS SHOWN FOR OAK-602, WITH DIELECTRIC THICKNESS .022" ± .0015". COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER) DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

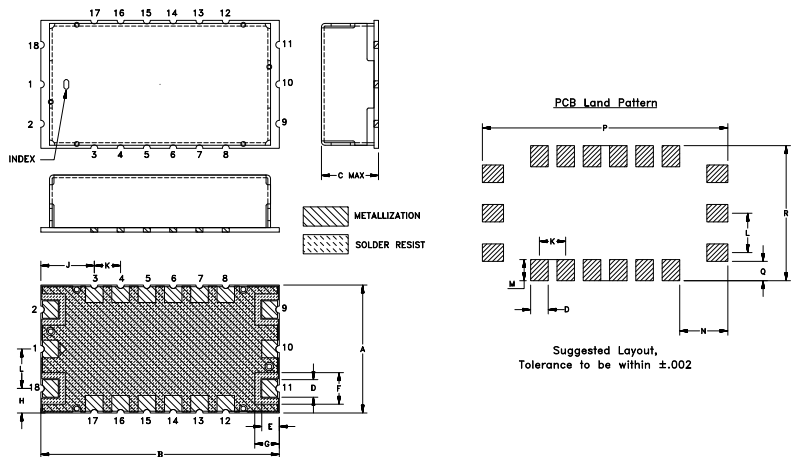

## Outline Dimensions ( inch / mm)

| A     | B     | C    | D    | E     | F    | G     | H     | J    |
|-------|-------|------|------|-------|------|-------|-------|------|
| .730  | 1.360 | .350 | .100 | .100  | .180 | .140  | .140  | .305 |
| 18.54 | 34.54 | 8.89 | 2.54 | 2.54  | 4.57 | 3.56  | 3.56  | 7.75 |
| K     | L     | M    | N    | P     | Q    | R     | Wt.   |      |
| .150  | .225  | .120 | .275 | 1.400 | .110 | .770  | grams |      |
| 3.81  | 5.72  | 3.05 | 6.99 | 35.56 | 2.79 | 19.56 | 6.0   |      |

Note: Please refer to case style drawing for details

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)