
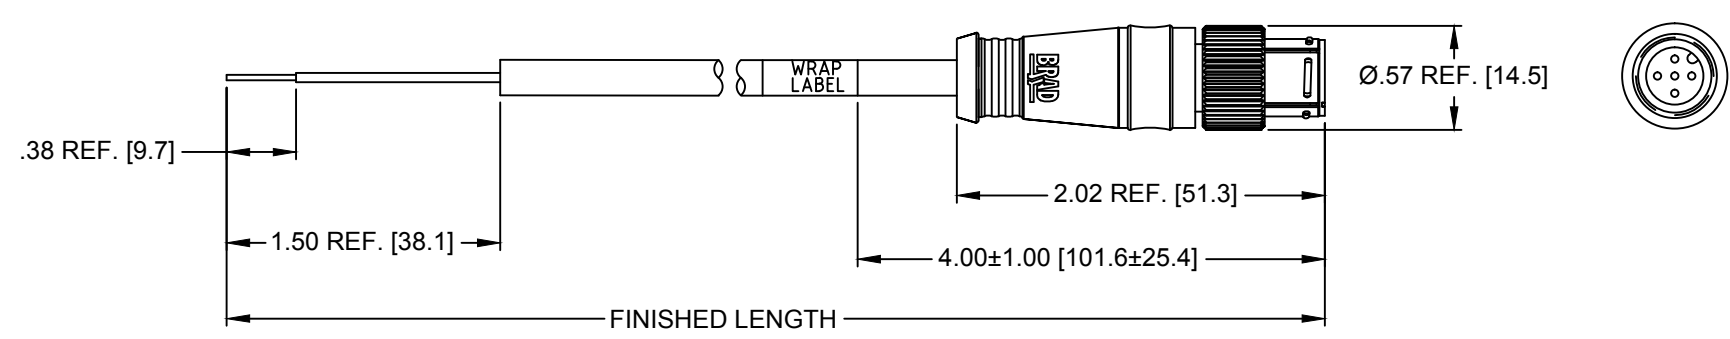


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1211930012	T03006B30M003	0.3 M +1.9 CM/-0 [1.0' +0.75"/-0]
1211930013	T03006B30M010	1.0 M +5.6 CM/-0 [3.3' +2.19"/-0]

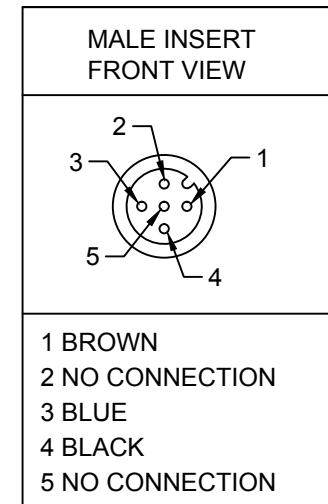

T03006B30M020

WIRE TYPE
0.34mm² [22 AWG] BLACK

CABLE LENGTH
M003----0.3 METER
M020----2 METER
M100----10 METER

MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : BLACK NYLON
COUPLING NUT: NICKEL PLATED COPPER ALLOY
MOLDED BODY: BLACK TPE
CABLE: 0.34mm² [22 AWG] 3 CONDUCTORS BLACK JACKET
WRAP LABEL: MYLAR YELLOW WITH BLACK LETTERS

ELECTRICAL
VOLTAGE RATING: 250V AC/DC
AMPERAGE: 4A

ENVIRONMENTAL
PROTECTION: IP67

OPERATION TEMP: -20°C~80°C

THE RECOMMENDED FEMALE CONNECTOR SHOULD HAVE NICKEL PLATING ON THE FEMALE THREADS

INITIAL RELEASE EC NO: IPG2015-1880 DRWN: KJOZWIK 2015/04/29 CHKD: VOU 2015/04/29 APPR: BWOODMAN 2015/05/12	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±--- 1 PLACE ±--- ±--- ANGULAR ±.5° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE INCH [MM]	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		▽=0 ▽C=0		DRAWN BY KJOZWIK	DATE 2014/02/13	MIC 3P MALE PUSHLOCK STRAIGHT BLACK TPU		
				CHECKED BY VOU	DATE 2015/04/29			
				APPROVED BY BWOODMAN	DATE 2015/05/12	MOLEX INCORPORATED		
A	REV		SEE CHART	MATERIAL NO.	DOCUMENT NO. SD-121193-005	SHEET NO. 1 OF 1		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION