



DIMENSIONS mm (inches)

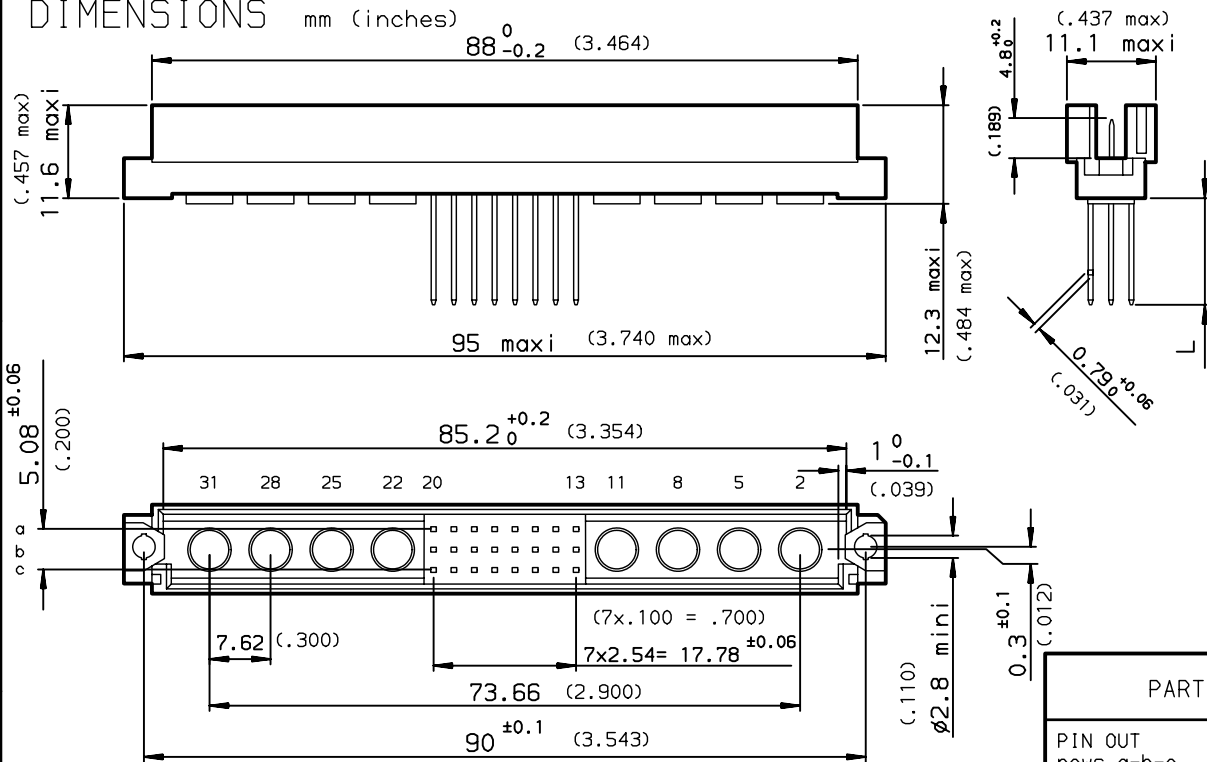

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000B

PART NUMBER	8609			G8		7	5	
PIN OUT								
rows a-b-c					3			24
rows a-c					4			16
NUMBER OF CONTACTS								
TERMINATION								
L = 13.3 ±0.25 (.523)				WW				15
L = 17.95 ±0.25 (.706)				WW				25
PERFORMANCE CLASS								
DIN 41612 class 3								4
DIN 41612 class 2								5
DIN 41612 class 1								6
TERMINATION TYPE								
TIN LEAD								000E1
LEAD FREE								E1LF

PCB DRILLING

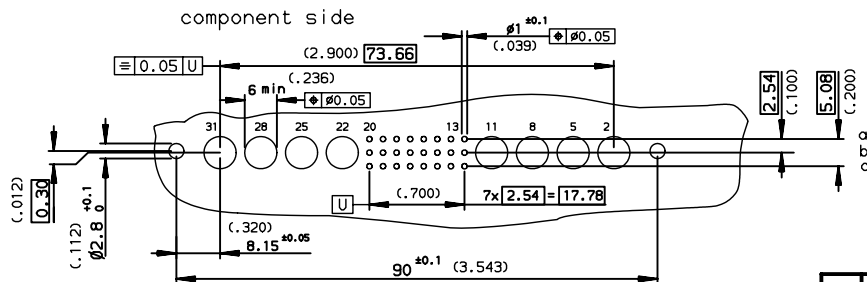

rev	ecn no	dr	date
B	-	RDU	1996/02/22
C	LS05-008	JTA	2005/03/17
D	LS06-0095	LGO	2006/06/16
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	ROUILLARD	1992/09/21	0.X	±0.1
Eng	TARON	1992/09/21	0.XX	±0.1
Chr	LEGARE	1992/09/21	0.XX' ±2'	±0.1
Appr	LEGARE	1992/09/21	Product family	DIN 8609
		size		A3
		Scale		1.5
		ECN		LS06-0095
		Spec ref		-
FCJ		title		STRAIGHT MALE WITH SPECIAL CONTACTS
		catalog no		WIRE WRAP
		dwg no		C-8609-0318
		CUSTOMER		sheet 1 of 1

European Views