



REV.	DESCRIPTION	DATE
A	New Drawing	2020/10/30

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Mylar	PI	250°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

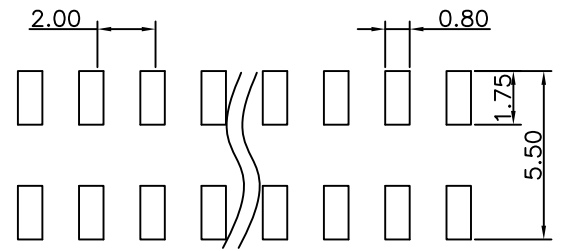

P.C.B LAYOUT

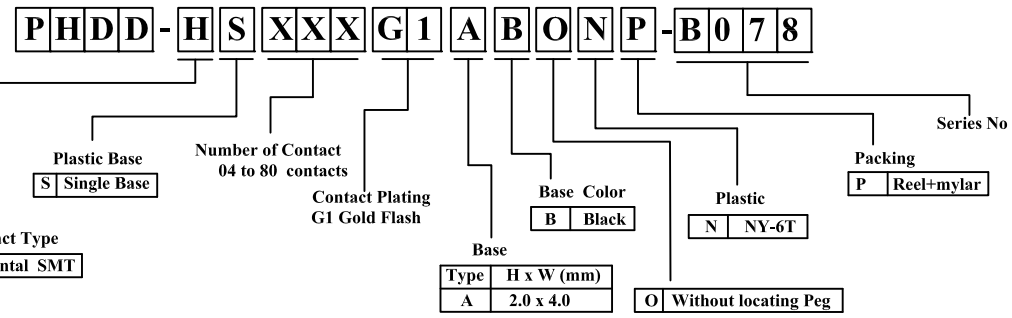

L=8.3/12.6mm

RoHS compliant




Superior Tech Co., Ltd.

General Tolerance		TITLE		2.0x2.0mm Pin Header ,Horizontal SMT Dual Row	
X.	± 0.5	DRAWN		DATE	NO.
.X	± 0.3	Tom		10-30-20'	002
.XX	± 0.2	CHECK		DATE	PART NO.
.XXX	± 0.1	APPROVED		DATE	PHDD-HSXXXG1ABONP-B078
Angle	± 5°				CUSTOMER NO.
					DK

REV.	UNIT	SCALE	
A	mm	1:1	

REV.	DESCRIPTION	DATE
A	New Drawing	2022/05/26

The number of PINs	Quantity per volume	Number of boxes / rolls	Box / quantity
2*5PIN	850PCS/Volume	10PCS	8500PCS

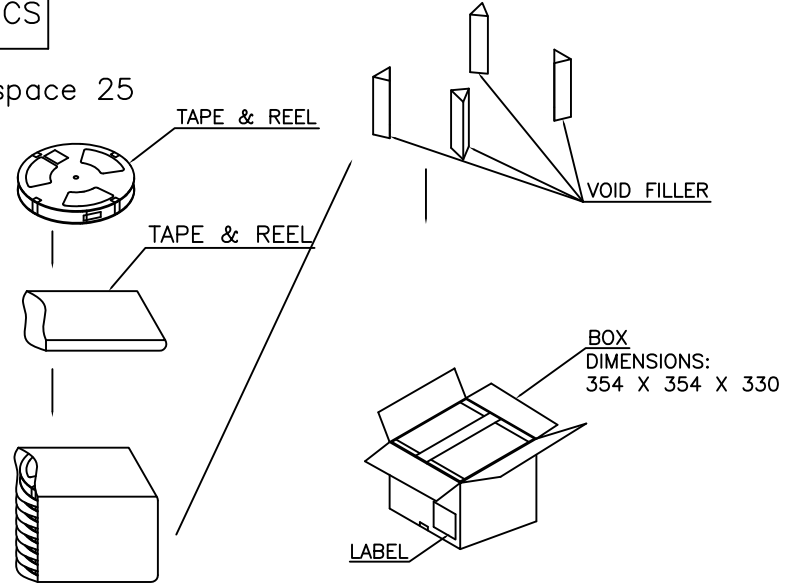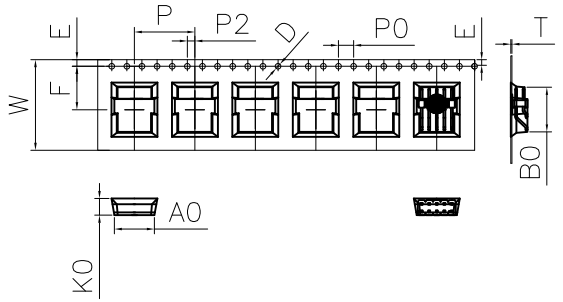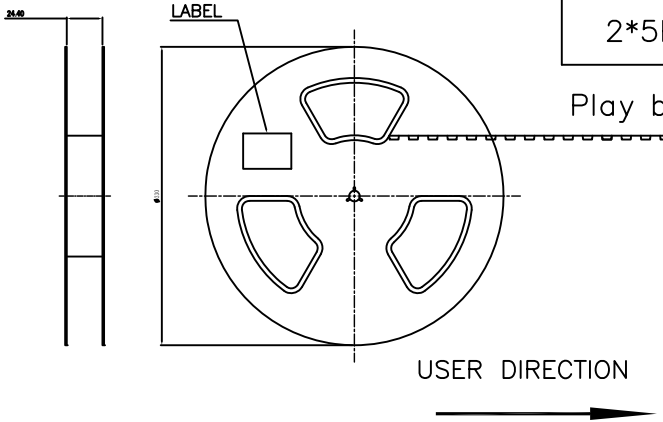

- (1) 10 sprocket hole pitch cumulative tolerance ± 0.20 .
- (2) Carrier camber is within 1 mm in 250mm.
- (3) All dimensions meet EIA-481-C requirements.
- (4) Material: **Transparent PS** Thickness: 0.35 ± 0.05 (JG-TR-400)
- (5) Reel: 13"*4", Carrier Length: 14.97 M/R.
- (6) Package quantity: 850. PCS.
- (7) ot Dimensione angle is 3° .

ITEM	W	A0	B0	K0	K1	P	F	S0	E	D0	D1	P0	P2	T
DIM	24.00	10.60	11.82	4.40	0.00	16.00	1.50	0.00	1.75	1.50	0.00	4.00	2.00	0.35

Superior Tech Co., Ltd.

General Tolerance		TITLE PHDD-HS010G1ABONP-B078 _Packing	
X. ± 0.5	DRAWN Tom	DATE 2022/05/26	NO.
.X ± 0.3	CHECK	DATE	PART NO. PHDD-HS010G1ABONP-B078
.XX ± 0.2	APPROVED	DATE	CUSTOMER NO. DK
.XXX ± 0.1	Angle $\pm 5^\circ$		

REV. A	UNIT mm	SCALE 1:1	
---------------	----------------	------------------	--