
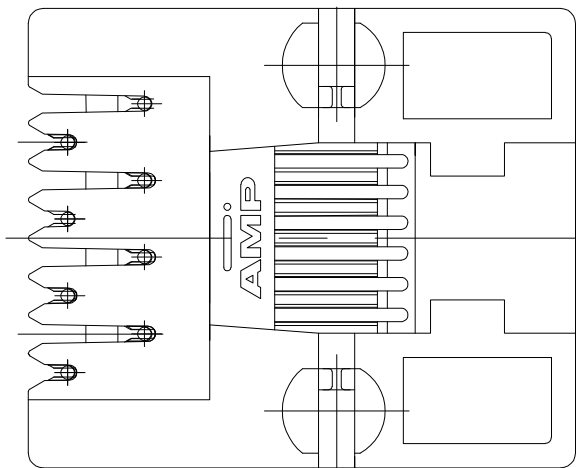
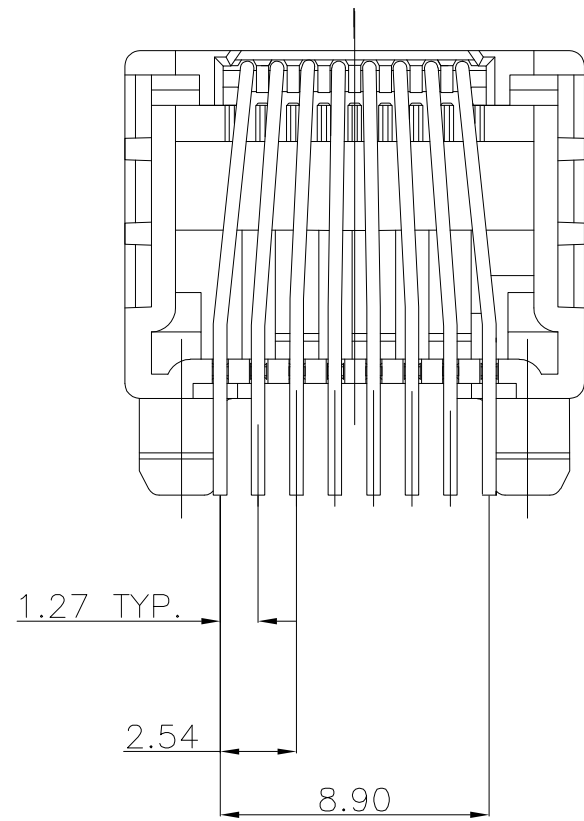
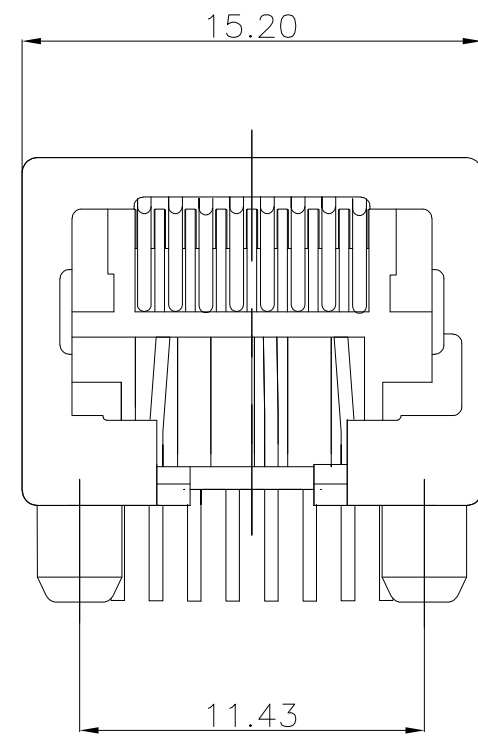
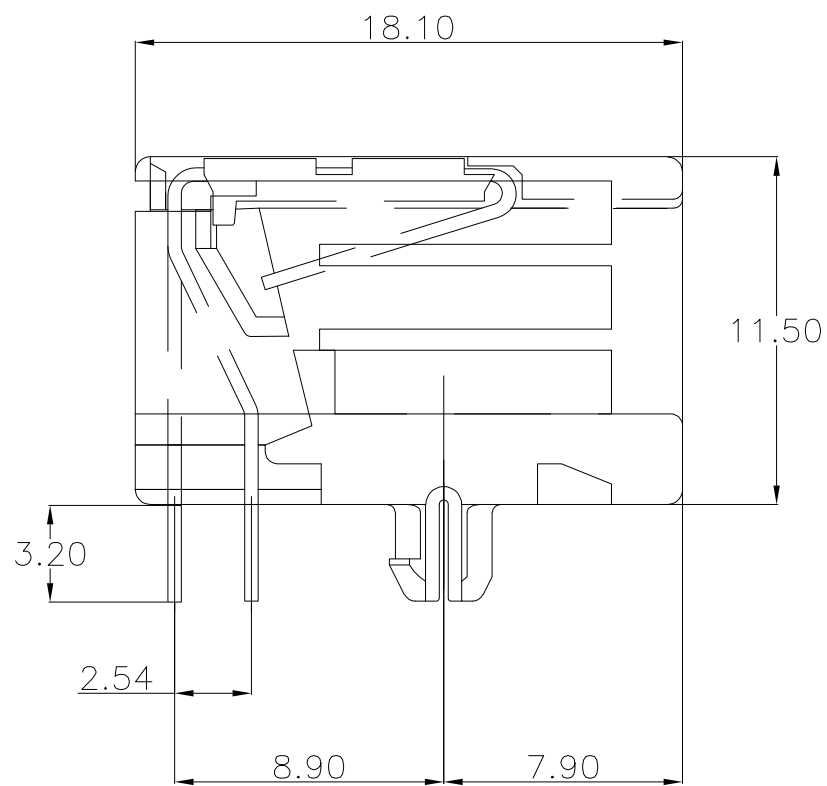


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
IR	-		L	ECR-10-020218	21JUN2011	PS
						RRP


NOTES:

1. FOR APPLICATION INFORMATION SEE SPEC. 114-19019.
2. FOR PERFORMANCE REQUIREMENTS SEE SPEC. 108-19064.
3. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15 .


 FOR THIS PACKAGING METHOD THE TRUE POSITION OF THE SOLDER TINES IS NOT GUARANTEED.

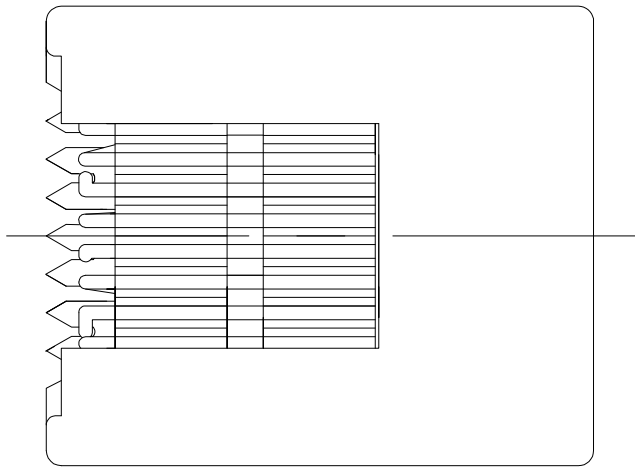

 1000 PIECES BULK PACKAGED	8 POS./ 8 CONTACTS	OVERALL: Ni 1.27 μ m MIN. ALL OVER THE CONTACTS	HOUSING COLOR BLACK: PBT, UL 94V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACTS: Ph BRONZE	2-215878-1
		SOLDER ZONE: Sn 2.5 μ m MIN. ON THE SOLDER ZONE OF THE CONTACT		215878-1
TAPE MOUNTED 700 PCS./REEL		MATING ZONE: PLATING CONFIRMS TO PRODUCT REQUIREMENTS AS PER SPECIFICATION 108-19064		
PACKAGING	REMARKS	FINISH	MATERIAL	ORDER NUMBER

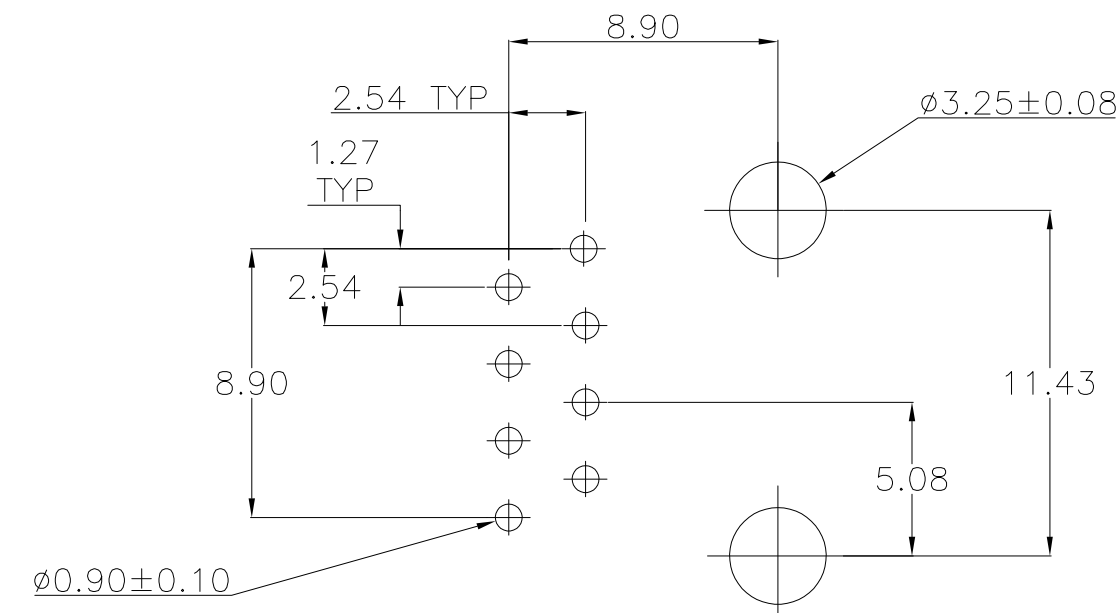

PRINTED CIRCUIT BOARD LAYOUT
VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.
PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.A.STERKEN 15NOV88	 TE Connectivity	
DIMENSIONS: mm		CHK W.BRUMMANS		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L.v.SOEST	NAME MODULAR JACK, 8 POS. 90 DEG LOW PROFILE FOR PRINTED CIRCUIT BOARD	
	0 PLC $\pm$ - 1 PLC $\pm$ - 2 PLC $\pm$ - 3 PLC $\pm$ - 4 PLC $\pm$ - ANGLES $\pm$ -	PRODUCT SPEC 108-19064 APPLICATION SPEC 114-19019		
MATERIAL SEE NOTES	FINISH SEE NOTES	WEIGHT -	SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING		DRAWING NO C-215878	RESTRICTED TO -	REV L
		SCALE -	SHEET 1 OF 1	