



THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 ALL RIGHTS RESERVED.
 © COPYRIGHT - By -

LOC	DIST	REVISIONS				APVD
		P	LTR	DESCRIPTION	DATE	
ES	-	K		REVISED PER ECO-13-015151	17DEC2013	FL FY

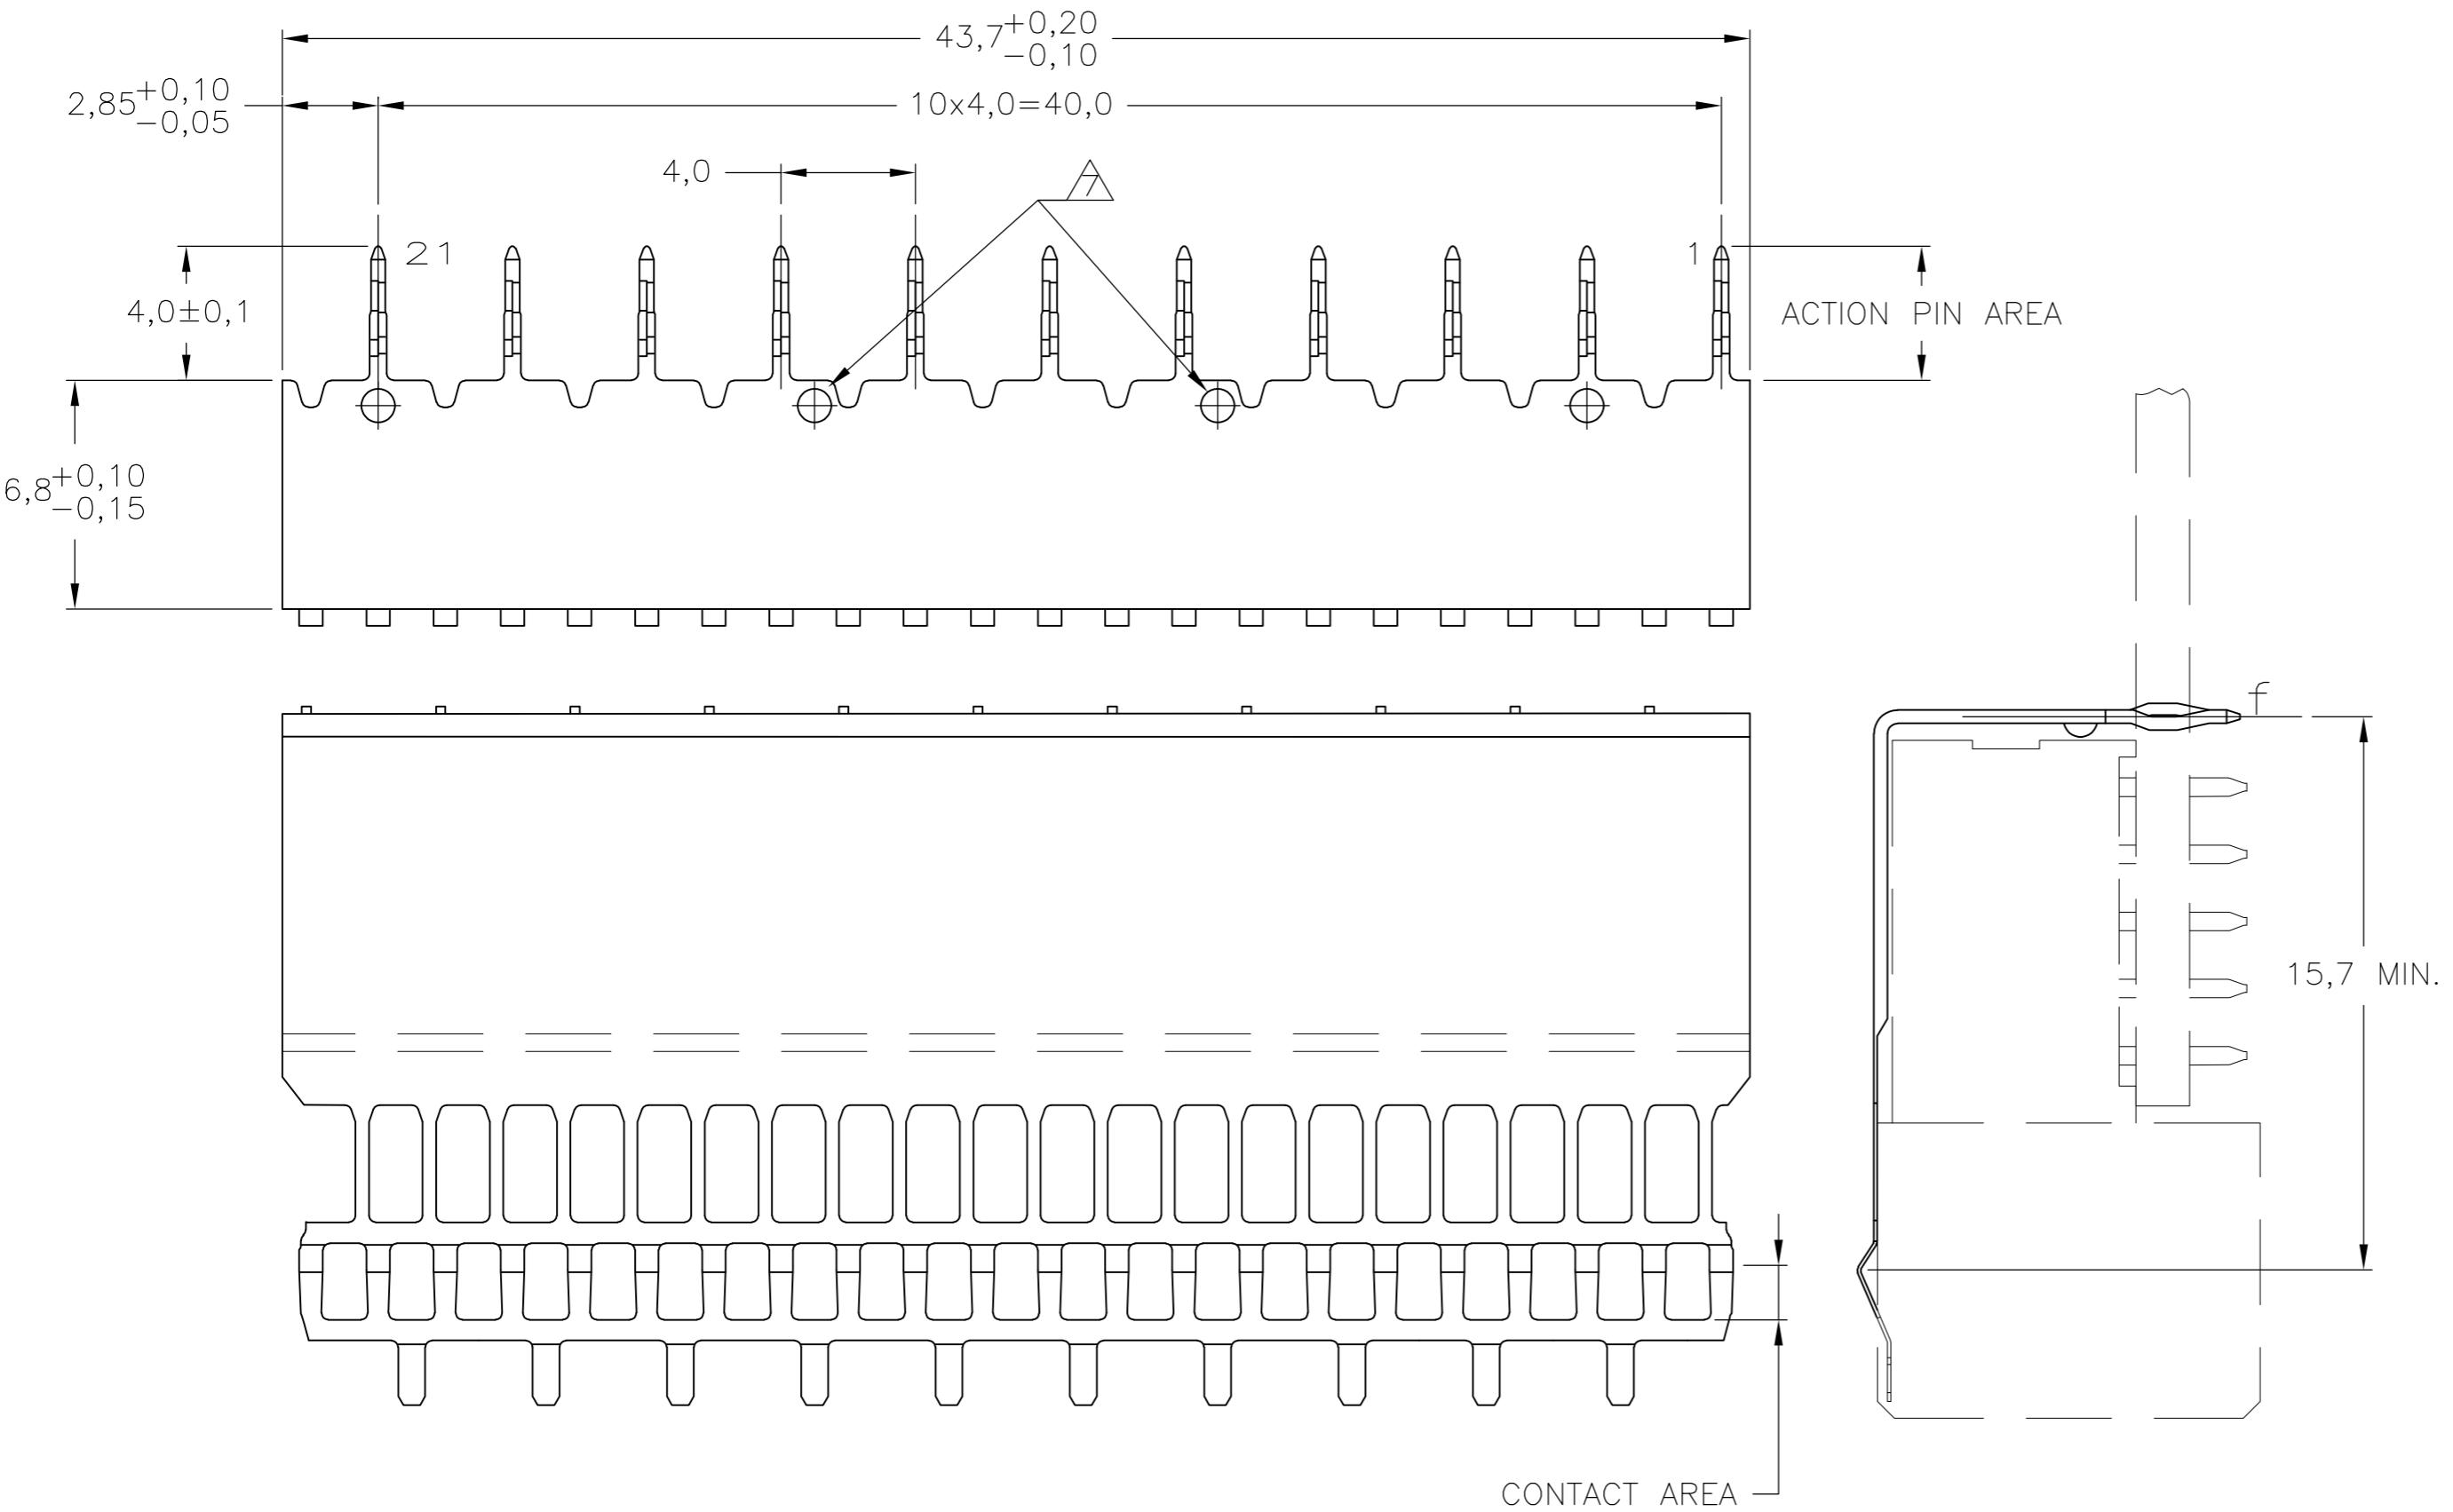

NOTES:

- 1 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- 2 MATERIAL: PHOSPHORBRONZE.
- 3 ROW "f" 11 PLATED THROUGH HOLES FOR UPPERSHIELD
- 4 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-22
- 5 COLUMNS 110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- 6 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN. ASTM B579 60/40 FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- 7 OPTIONAL DIMPLES AT DISCRETION OF DIE ENGINEER.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 9 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 10 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- 11 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- 12 0.76µm MIN GOLD PLATING AT MATING SURFACE.
- 13 1.27µm MIN GOLD PLATING AT MATING SURFACE.

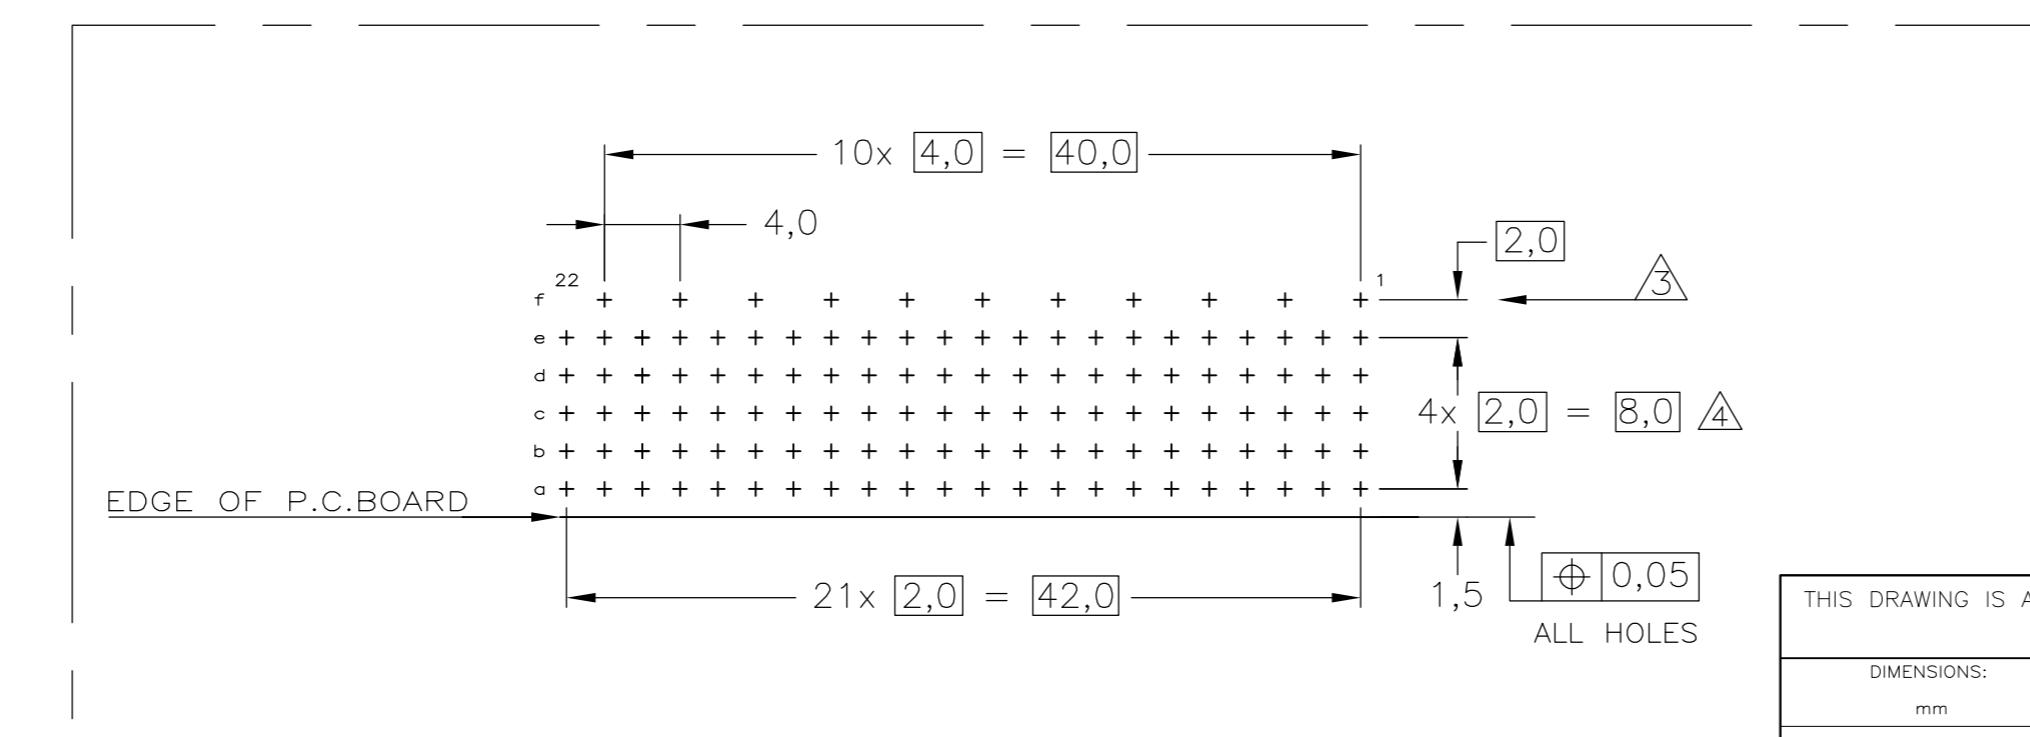

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE
 APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	
0-PLC	± -
1-PLC	± -
2-PLC	± -
3-PLC	± -
4-PLC	± -
ANGLES	± -
TOLERANCES UNLESS OTHERWISE SPECIFIED:	
W. v.d.HEIJDEN	
CHK 17-01-97	
W. v.d.HEIJDEN	
APVD	
F. v.KONINGSBRUGGE	
PRODUCT SPEC	
108-19082	
APPLICATION SPEC	
114-19029	
MATERIAL	FINISH
-	-
WEIGHT	-
CUSTOMER DRAWING	

TE Connectivity			
Z-PACK 2mm HM			
FEMALE GROUND RETURN UPPER SHIELD			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-352151	-
SCALE	5:1	SHEET	1 OF 1
REV	K		