


KHN4NX (Reflow) Haptics




Outline UNIT:mm

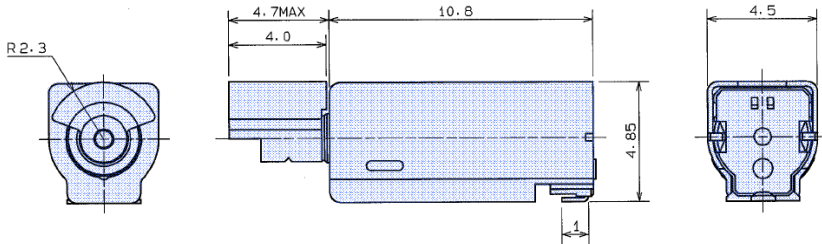



Specifications

Model	Operating Voltage (V)	Rated Voltage (V)	Rated Speed (min ⁻¹)	Rated Current (mA)	Starting Voltage (V)	Starting Current (mA)	Vibration (N)	Weight (g)	Volume (mm ³)
KHN4NX1RC	1.1 to 1.5	1.3	9500	52	0.5	74	0.48	0.55	125

Characteristics

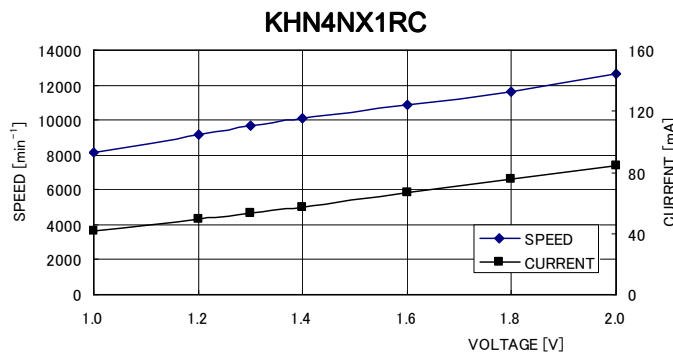

Improvement of Haptics function

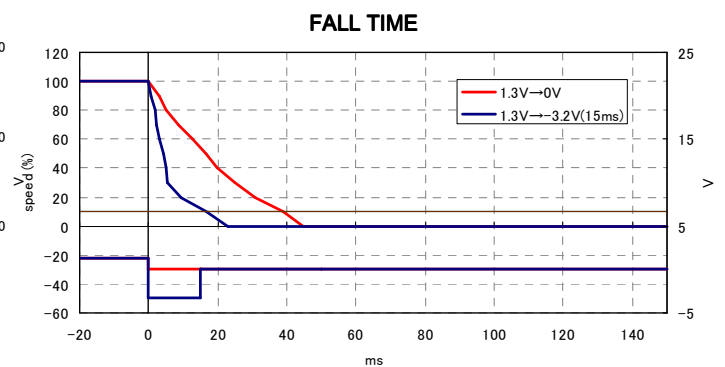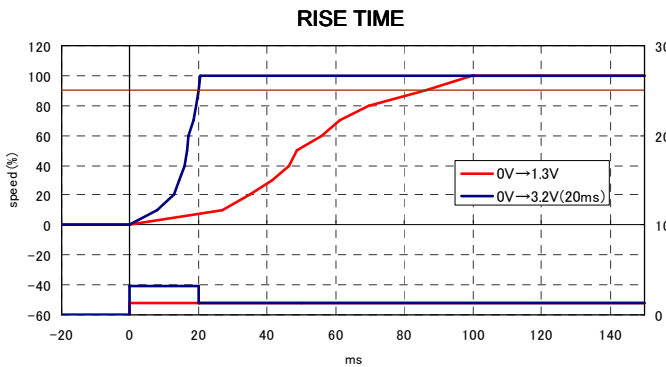

1. To reduce rise time, motor can be applied at 3.2V(20msec). 2. To reduce fall time, motor can be applied at -3.2V(15msec).

※please do not applied at 3.2V more than 30msec.

※please do not applied at -3.2V more than 30msec.