
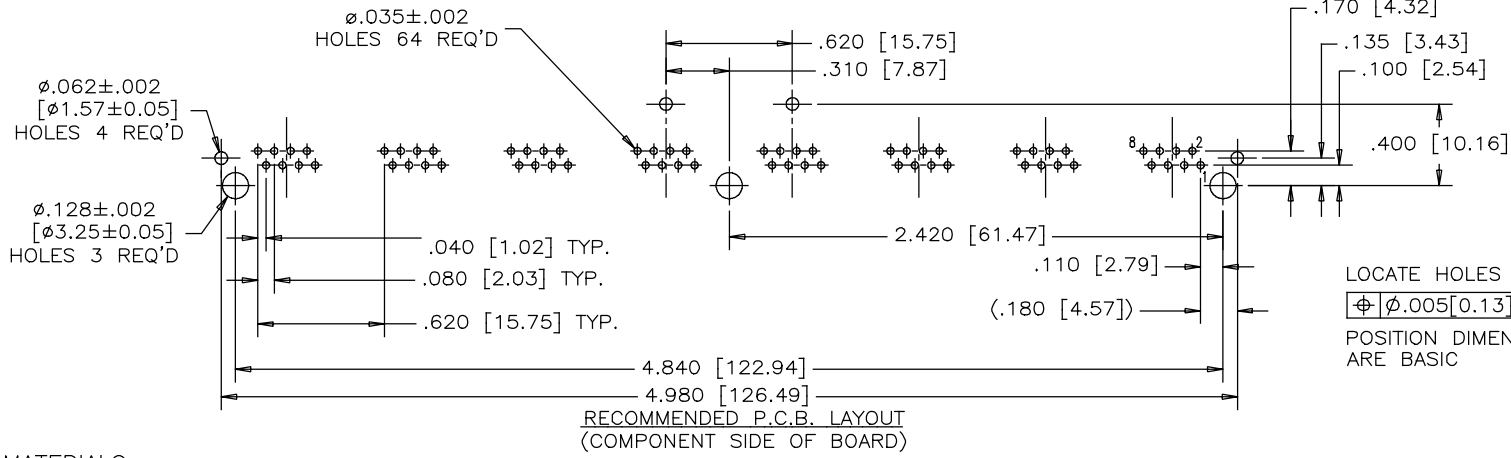
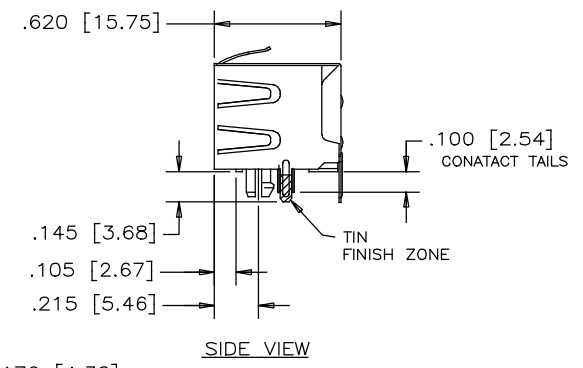


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR17/18	L.CHAN

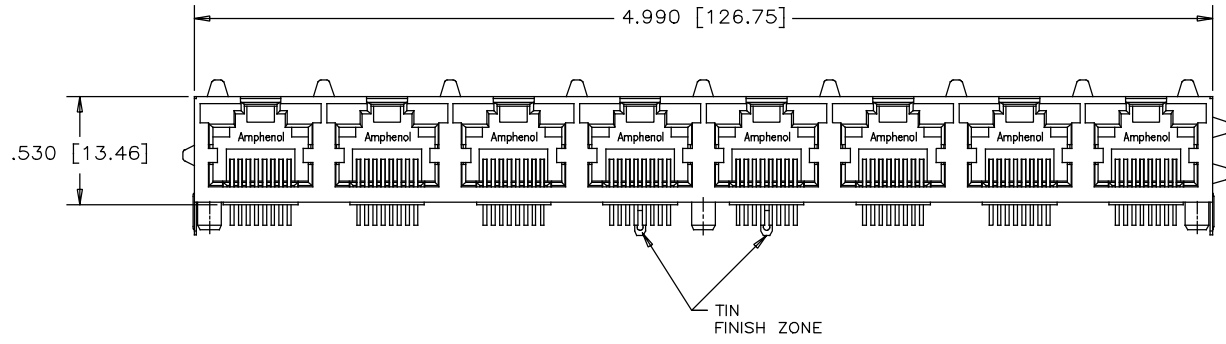

LOCATE HOLES
 $\varnothing \phi .005 [0.13]$
 POSITION DIMENSIONS ARE BASIC


MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0, COLOR BLACK

CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING ON MATING SURFACE.
 [SEE PART NUMBER FOR THICKNESS]
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ" [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: COPPER ALLOY WITH TIN FINISH ON SOLDER TAIL
PART NUMBER: RJHSE-X380-08

GOLD PLATING

- E=RJ45 FLAT CONTACT 6u"
- G=RJ45 FLAT CONTACT 15u"
- J=RJ45 FLAT CONTACT 30u"
- 5=RJ45 FLAT CONTACT 50u"

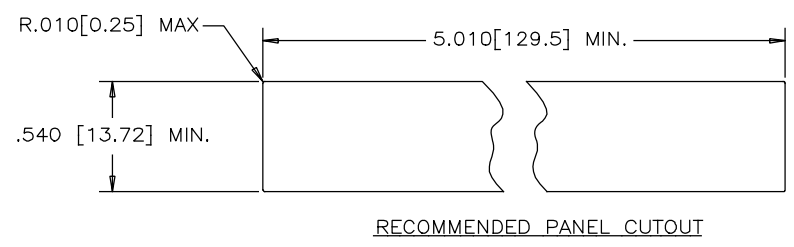

UNLESS SPECIFIED OTHERWISE		DRAWN W.QIU	DATE APR17/18
PRIMARY UNITS INCH	CHECKED L.CHAN	APR17/18	
SECONDARY MILLIMETER	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.025	ENG. REL. NO.		
2 DECIMAL PLACES ±0.020	REF.		
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1.0°	DO NOT SCALE DRAWING		

Amphenol Canada Corp.
 www.amphenolcanada.com

TITLE: EIGHT-PORT HIGH SPEED MODULAR JACK, 8 POSITIONS, 8 CONTACTS, SHIELD WITHOUT LED, -RoHS COMPLIANT

DWG. NO. P-RJHSE-X380-08 REV A

CODE ID NO. 03554 DWG SIZE: c SCALE: N/A SHEET 1 OF 1