


THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS

1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:
 - a - As supplied
 - b - After unrestricted recovery

NOTES

RAYCLAD TRADEMARK & PART NO.,
DRAWING PART NO., & REF. DESIGNATIONS
LOCATED ON OUTSIDE SURFACE.

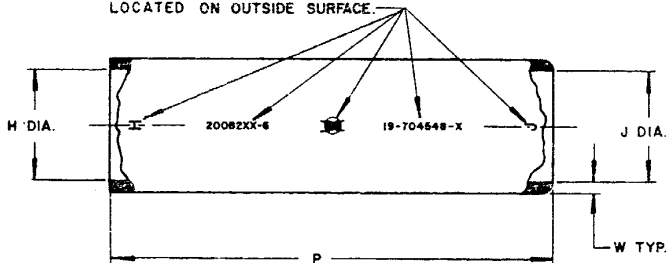

ORDERING
INFORMATION

| Matl No. | Description | Rayclad Matl. Spec. | Specific Grav. Max. |
|----------|--------------------------|---------------------|---------------------|
| 6 | Silicone, flame retarded | RT 602 | 1.35 |

Add material number as suffix to part number;
Example - Order 200B212-6 when silicone part is required.

TABLE OF DIMENSIONS

| PART NO. | H | | J | | P | W | | | | | | | |
|----------|-------|-------|-------|-------|---|--------|--------|-----|--|--|--|--|--|
| | Min a | Max b | Min a | Max b | | ±10% a | ±20% b | | | | | | |
| 200B202- | 1.12 | .37 | 1.12 | .37 | — | 3.00 | — | .07 | | | | | |
| 200B212- | 1.70 | .50 | 1.70 | .50 | — | 3.00 | — | .07 | | | | | |
| 200B222- | 2.30 | .75 | 2.30 | .75 | — | 3.00 | — | .10 | | | | | |
| 200B233- | 3.12 | .95 | 3.12 | .95 | — | 3.00 | — | .12 | | | | | |
| 200B246- | 4.05 | 1.37 | 4.05 | 1.37 | — | 3.00 | — | .12 | | | | | |

| | | | | | | | | | |
|--|----------|-------|-----------|----------------------|-------|----|--------------------------------------|-------------------------------------|---------------------|
| <p>RAYCLAD TUBES INCORPORATED A SUBSIDIARY OF RAYCHEM CORPORATION</p> | E.O. HOP | REV D | DATE 9/67 | DESCRIPTION Retyped. | DRN | DD | PART DESCRIPTION SLEEVE, STRAIGHT | PART NO. 200B202 thru 246 | REV LTR D |
| | | | | | CHK'D | KT | | | |
| | | | | | AUTH | RW | | | |
| | | | | | AUTH | HP | | | |
| | | | | | | | DATE | September 1, 1967 | |

If this document is printed it becomes uncontrolled.
Check for the latest revision.