



**REED SWITCH DEVELOPMENTS CORP.**

2524 Norwood Court  
Racine, WI 53403  
Ph: (262)883-9060

[sales@reedswitchdevelopments.com](mailto:sales@reedswitchdevelopments.com)

# SPECIFICATION SHEET

## 2005-1965-400

Alternate Part Numbers:  
**AM2005-1965-10K01**  
**3730-2005-1965-400-ND**

Active / Equivalent Part Numbers:

**2005-1965-400 - KIT - Contains**

(1) 2005-1965-100 - Magnetic Reed Sensor

(1) 2005-4000-000 - Magnetic Actuator

**AM2005-1965-10K01 - KIT - Contains**

(1) AM2005-1965-10-01 - Magnetic Reed Sensor

(1) AM2005-4000-00-01 - Magnetic Actuator

**3730-2005-1965-400-ND - KIT - Contains**


(1) 3730-2005-1965-100-ND - Magnetic Reed Sensor

(1) 3730-2005-4000-000-ND - Magnetic Actuator

**Sensor (Reed) - Specifications 1965**

|                                    |                             |                   |      |
|------------------------------------|-----------------------------|-------------------|------|
| Physical                           | Configuration               | SPST              |      |
|                                    | Form                        | A                 |      |
|                                    | Contact Position            | CENTER            |      |
|                                    | Glass L                     | 19.00             | mm   |
|                                    | Glass D                     | 2.60              | mm   |
|                                    | Total L*                    | 55.00             | mm   |
|                                    | Wire D                      | 0.70              | mm   |
|                                    | Gap Location                | CENTER            |      |
|                                    | Mount Spec*                 | THRU              |      |
|                                    | Contact Material            | RHODIUM           |      |
|                                    | Max Vibration Resistance    | 35                | G    |
|                                    | Max Shock Resistance (11ms) | 50                | G    |
|                                    | Lead Tensile Strength       | N/A               | KG   |
| Operating                          | Pull in (+/- 2AT)*          | 20 - 25           | AT   |
|                                    | Drop out*                   | 15                | AT   |
|                                    | Operate Time                | 2.00              | ms   |
|                                    | Bounce Time                 | 0.50              | ms   |
|                                    | Release Time                | 0.10              | µs   |
|                                    | Resonant Frequency          | 4200              | Hz   |
|                                    | Max Operating Frequency     | 300               | Hz   |
|                                    | Operating Temperature Range | -40 - 105         | °C   |
|                                    | Storage Temperature         | N/A               | °C   |
|                                    | Electrical                  | DC Contact Rating | 40   |
| AC Contact Rating                  |                             | 40                | VA   |
| DC Switching Voltage               |                             | 400               | VDC  |
| AC Switching Voltage               |                             | 400               | VAC  |
| DC Switching Current               |                             | 2.00              | A    |
| AC Switching Current               |                             | 2.00              | A    |
| DC Max Carry Current               |                             | 3.00              | A    |
| AC Max Carry Current               |                             | 3.00              | A    |
| Min Breakdown Voltage              |                             | 1000              | VDC  |
| Max Initial Contact Resistance     |                             | 80                | mOhm |
| Typical Initial Contact Resistance |                             | N/A               | mOhm |
| Max Contact Capacitance            |                             | 0.50              | pF   |
| Min Insulation Resistance          | 10 <sup>11</sup>            | Ohm               |      |

\* Pre-processed, bare reed element

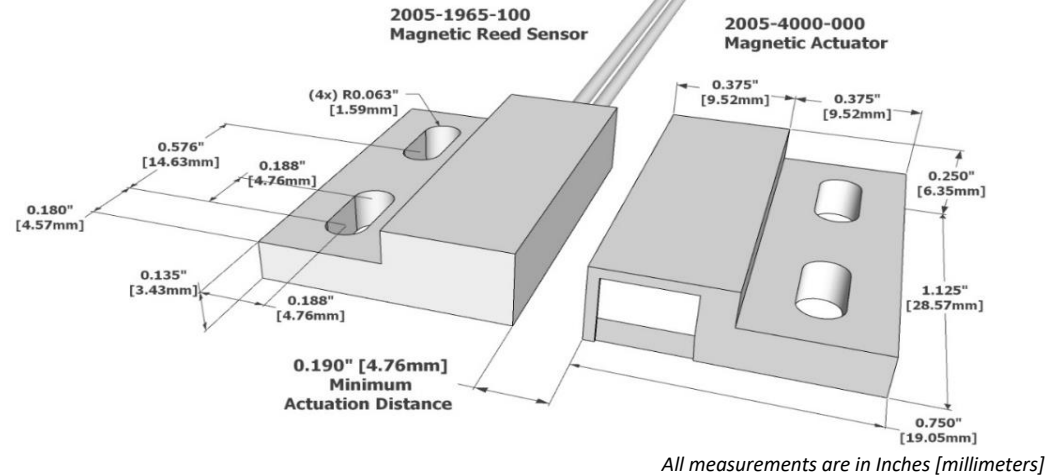

All measurements are in Inches [millimeters]

**Sensor - Wire/Cable Characteristics (cont.)**

| Type                | Wire         |
|---------------------|--------------|
| Conductor Count     | 2            |
| Length              | 6.0"/152.4mm |
| Colors              | BLK          |
| Insulation Material | PVC          |
| Gauge               | 24 AWG       |
| Stranded Copper     | 7 STR-TC     |
| Maximum Temp        | 105°C        |

**Housing Characteristics 2005**

| Rectangular w/ Mounting Tab/Holes |                |
|-----------------------------------|----------------|
| Length                            | 1.125"/28.58mm |
| Width                             | 0.750"/19.05mm |
| Height                            | 0.250"/6.35mm  |
| Material                          | Celanex 3316   |

**Standard Actuator: 2005-4000-000**

| Specifications               | Description    | UM     |
|------------------------------|----------------|--------|
| Magnetic Orientation         | Through Length |        |
| Max Operating Temp.          | 975/525        | °F/°C  |
| Curie Temp.                  | 1580/860       | °F/°C  |
| BR max                       | 12.8           | kGauss |
| BH max                       | 5.5            | MGOe   |
| Coercive Force Hc            | 640            | kOe    |
| Intrinsic Coercive Force Hci | 640            | kOe    |

**Standard Sensor/Actuator - Min. Actuation Distance**

|               |             |
|---------------|-------------|
| 2005-4000-000 | 0.19"/4.8mm |
|---------------|-------------|

**Assembly Certifications**

|                                 |   |
|---------------------------------|---|
| UL Recognized (File #: E102207) | Y |
| RoHS / REACH Compliant          | Y |
| Conflict Free Material          | Y |

REV DATE: 04/20/2023

DISCLAIMER NOTICE: INFORMATION FURNISHED IS PROPRIETARY, AND IS BELIEVED TO BE ACCURATE AND RELIABLE, AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.

**WBE Certified - State of Wisconsin - MFR CAGE CODE: 32604**

[www.reedswitchdevelopments.com](http://www.reedswitchdevelopments.com)