ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00396	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, molding style	2	
2	30-01374	Wire, 2C, BC, 28 AWG, 300V, 80C, 4.3 mm, shielded, PVC, nylon braid	1	
3	24-00085	Overmold, audio plug, 3.5 mm, 90° slim line, Tensility	2	PVC, black

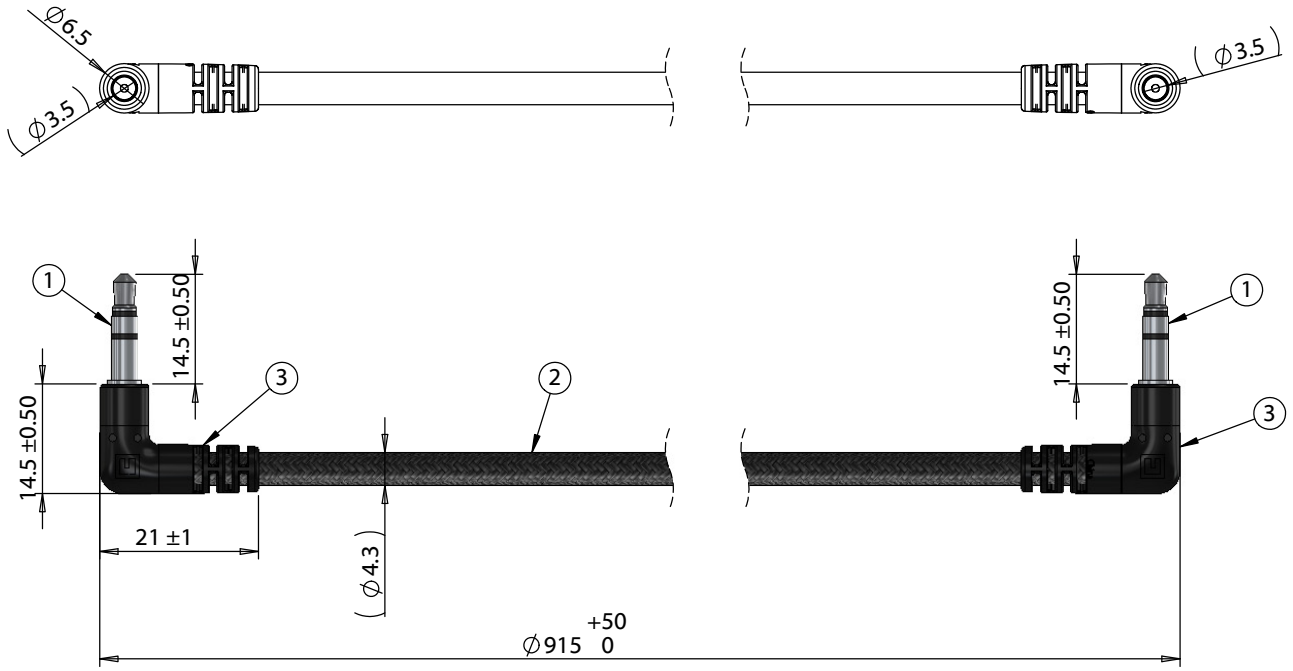



Wiring Diagram		
50-00396	wire color	50-00396
A	red	A
B	white	B
C	shield	C

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:
A	8/10/2020	Initial release

Prepared:
JC
Digitally signed by JC
Date: 2020.08.10 11:06:19 -07'00'

Verified:
AW
Digitally signed by AW
Date: 2020.08.10 13:30:27 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
Cable, 915 mm, 3.5 mm 3C 90° 50-00396 audio plug to same, 28 AWG, 30-01374 wire, nylon braided

TENSILITY
tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A
Part number: 10-03751
Scale: 1:1
Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1