
т	۵	п	m	O





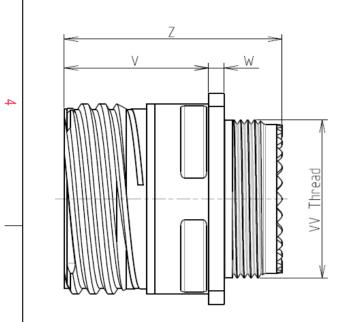

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 10.45 g ± 10%

8D 0

G

09

Ζ

98


S


F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M12x1-6g		

Е



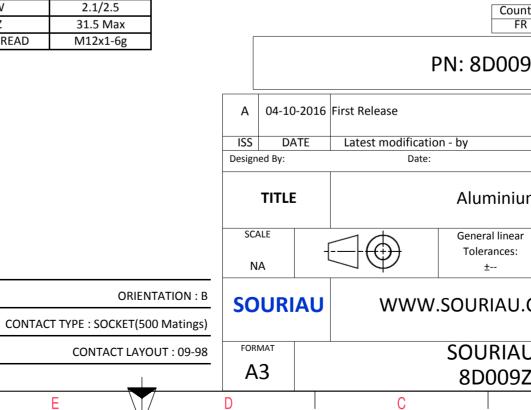

	Φ		A			
S EX4	AMPLE				3	
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)						
untry FR	y Jurisdiction & Control List Not Listed					
9Z98SB						
				MOD N°		
um	customer drawing Im Receptacle 8D series					
ar	NPRDS / PROJECT					
		_	359		1	
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	U DRG N° SHEET Z98SB-C 1/2					
129	828-C B		A	1/2	J	

r	工	۵	н г	m	D	0
		Contact Layout				Panel Cutou
4	-X	Φ _B Λ			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numb size 9 -98 3	n X-axis (₩	ØT ØT
ω						Dim ØA ØAA R1 ØT
	L					
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either or (professional recommendat
N						PN: 8D0092
					A 04-10-2	016 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Aluminium
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D009Z
	Н	G	F	E	D	C

