

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1



Conductor

Conductor count: 1
 Gauge: 30 AWG 0.05 mm²
 Material: tinned copper
 Strand size: \varnothing 0.254 mm (solid)
 Resistance at 20 °C: 361 Ω /km max

Insulator

Material: Polyphenylene Ether, Modified (mPPE)
 Color: gray
 Diameter: \varnothing 0.8 \pm 0.08 mm
 Nominal thickness: 0.25 mm
 Resistance at 20 °C: 100 M Ω /km min

Wire marking: E339579 UL AWM STYLE 11028 30 AWG 105°C
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

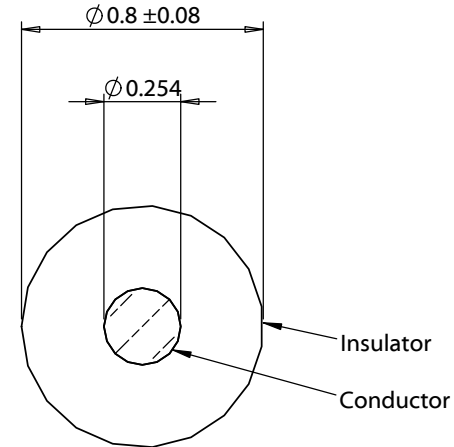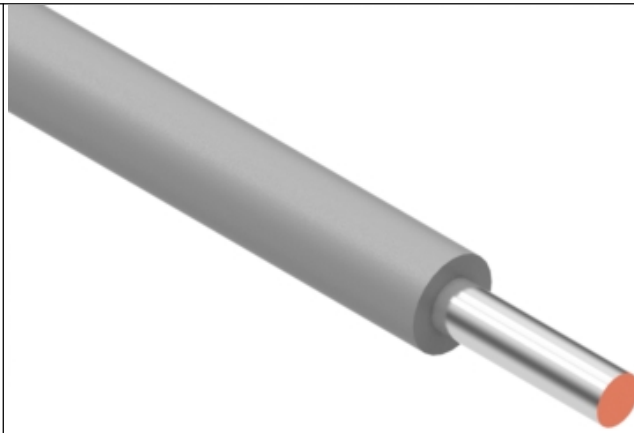

Revision:	Date:	Description:	Prepared: AW <small>Digitally signed by AW Date: 2021.06.03 12:43:05 -07'00'</small>	Notes:	TENSILITY <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>
A	6/3/2021	Initial release	Verified: JC <small>Digitally signed by JC Date: 2021.06.07 12:15:15 -07'00'</small>	RoHS compliant Phthalate and halogen free	
			Dimensions are in millimeters. Tolerances: X: \pm 0.5 mm X.X: \pm 0.3 mm X.XX: \pm 0.05 mm	Description:	Size: Part number:
				Wire, hook-up, tinned solid core, 30 AWG, UL 11028, 600V, 105C, 0.8 mm, mPPE, gray	A 30-02130
				Scale: 40:1	Sheet 1 of 1

5

4

3

2

1