


Steward

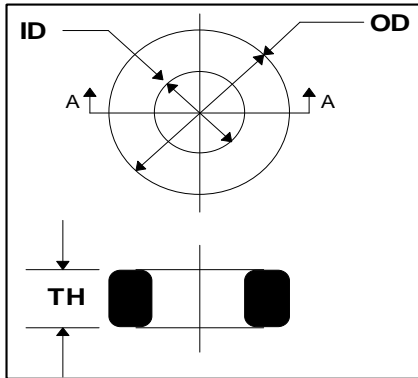

CORE DIMENSIONS				35T0625-000			
UNCOATED CORE							
	MM	INCHES		MM	INCHES		
OD	15.88	(.625)	±	.38	(.015)		
ID	8.89	(.350)	±	.38	(.015)		
TH	4.70	(.185)	±	.13	(.005)		
EPOXY COATING				35T0625-00H			
OD	16.03	(.631)	±	.53	(.021)		
ID	8.74	(.344)	±	.53	(.021)		
TH	4.85	(.191)	±	.28	(.011)		

WEIGHT / K 3.1158 KGS 6.8690 LBS
 INITIAL PERMEABILITY 5000

ROOM TEMPERATURE ELECTRICAL SPECIFICATION									
	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
L1-1T	-20.0%	2.18	2.73	3.27	20.0%	100	7.09	10	1
L1-10T	-20.0%	218.1	272.7	327.2	20.0%	100	70.9	10	10
Q		10							

COATING SPECIFICATIONS			
TYPE	Max. Coating (mm / mils.)	Min. DLB VAC	TEST FORCE (LB)
Epoxy	(0.1524 / 6.0)	1000	2.11

NOTES:



Rev	Description	Date	INT
A	Original Draft	11/18/1998	TPM
B	BROCHURE 58 REV2 12/2004	1/24/2005	TPM
C	CHANGE COATING FROM POLY TO EPOXY, Revised Template	5/26/2006	WMM

Date:5/26/2006	DWG # 35T0625-00H-C	Rev:
Drawn By: WMM	Title # 35T0625-00H	C

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT