
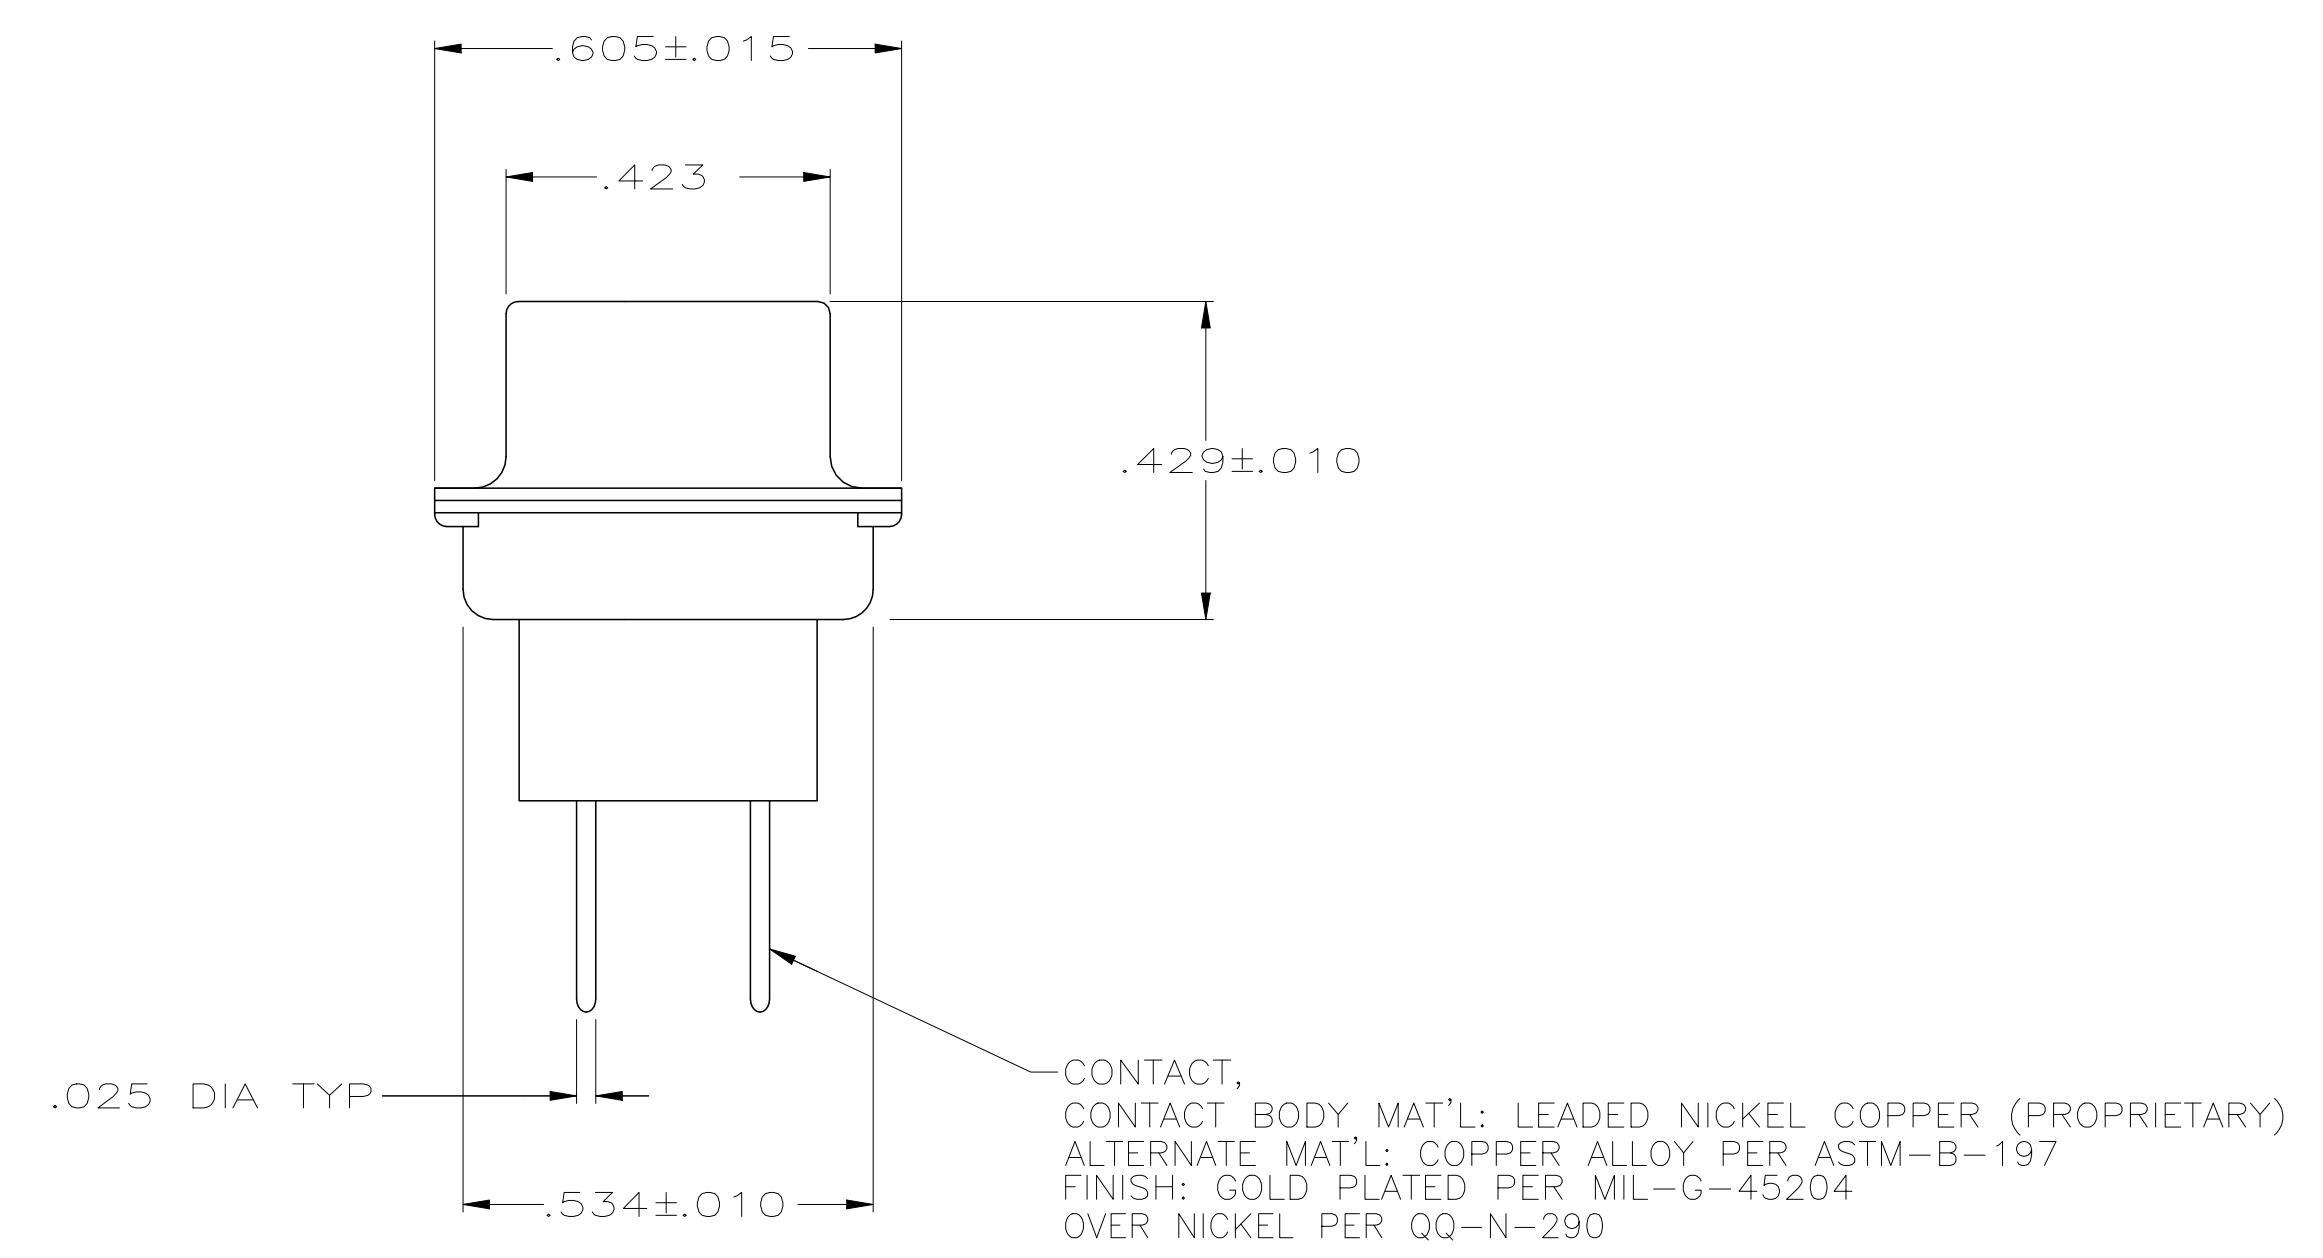
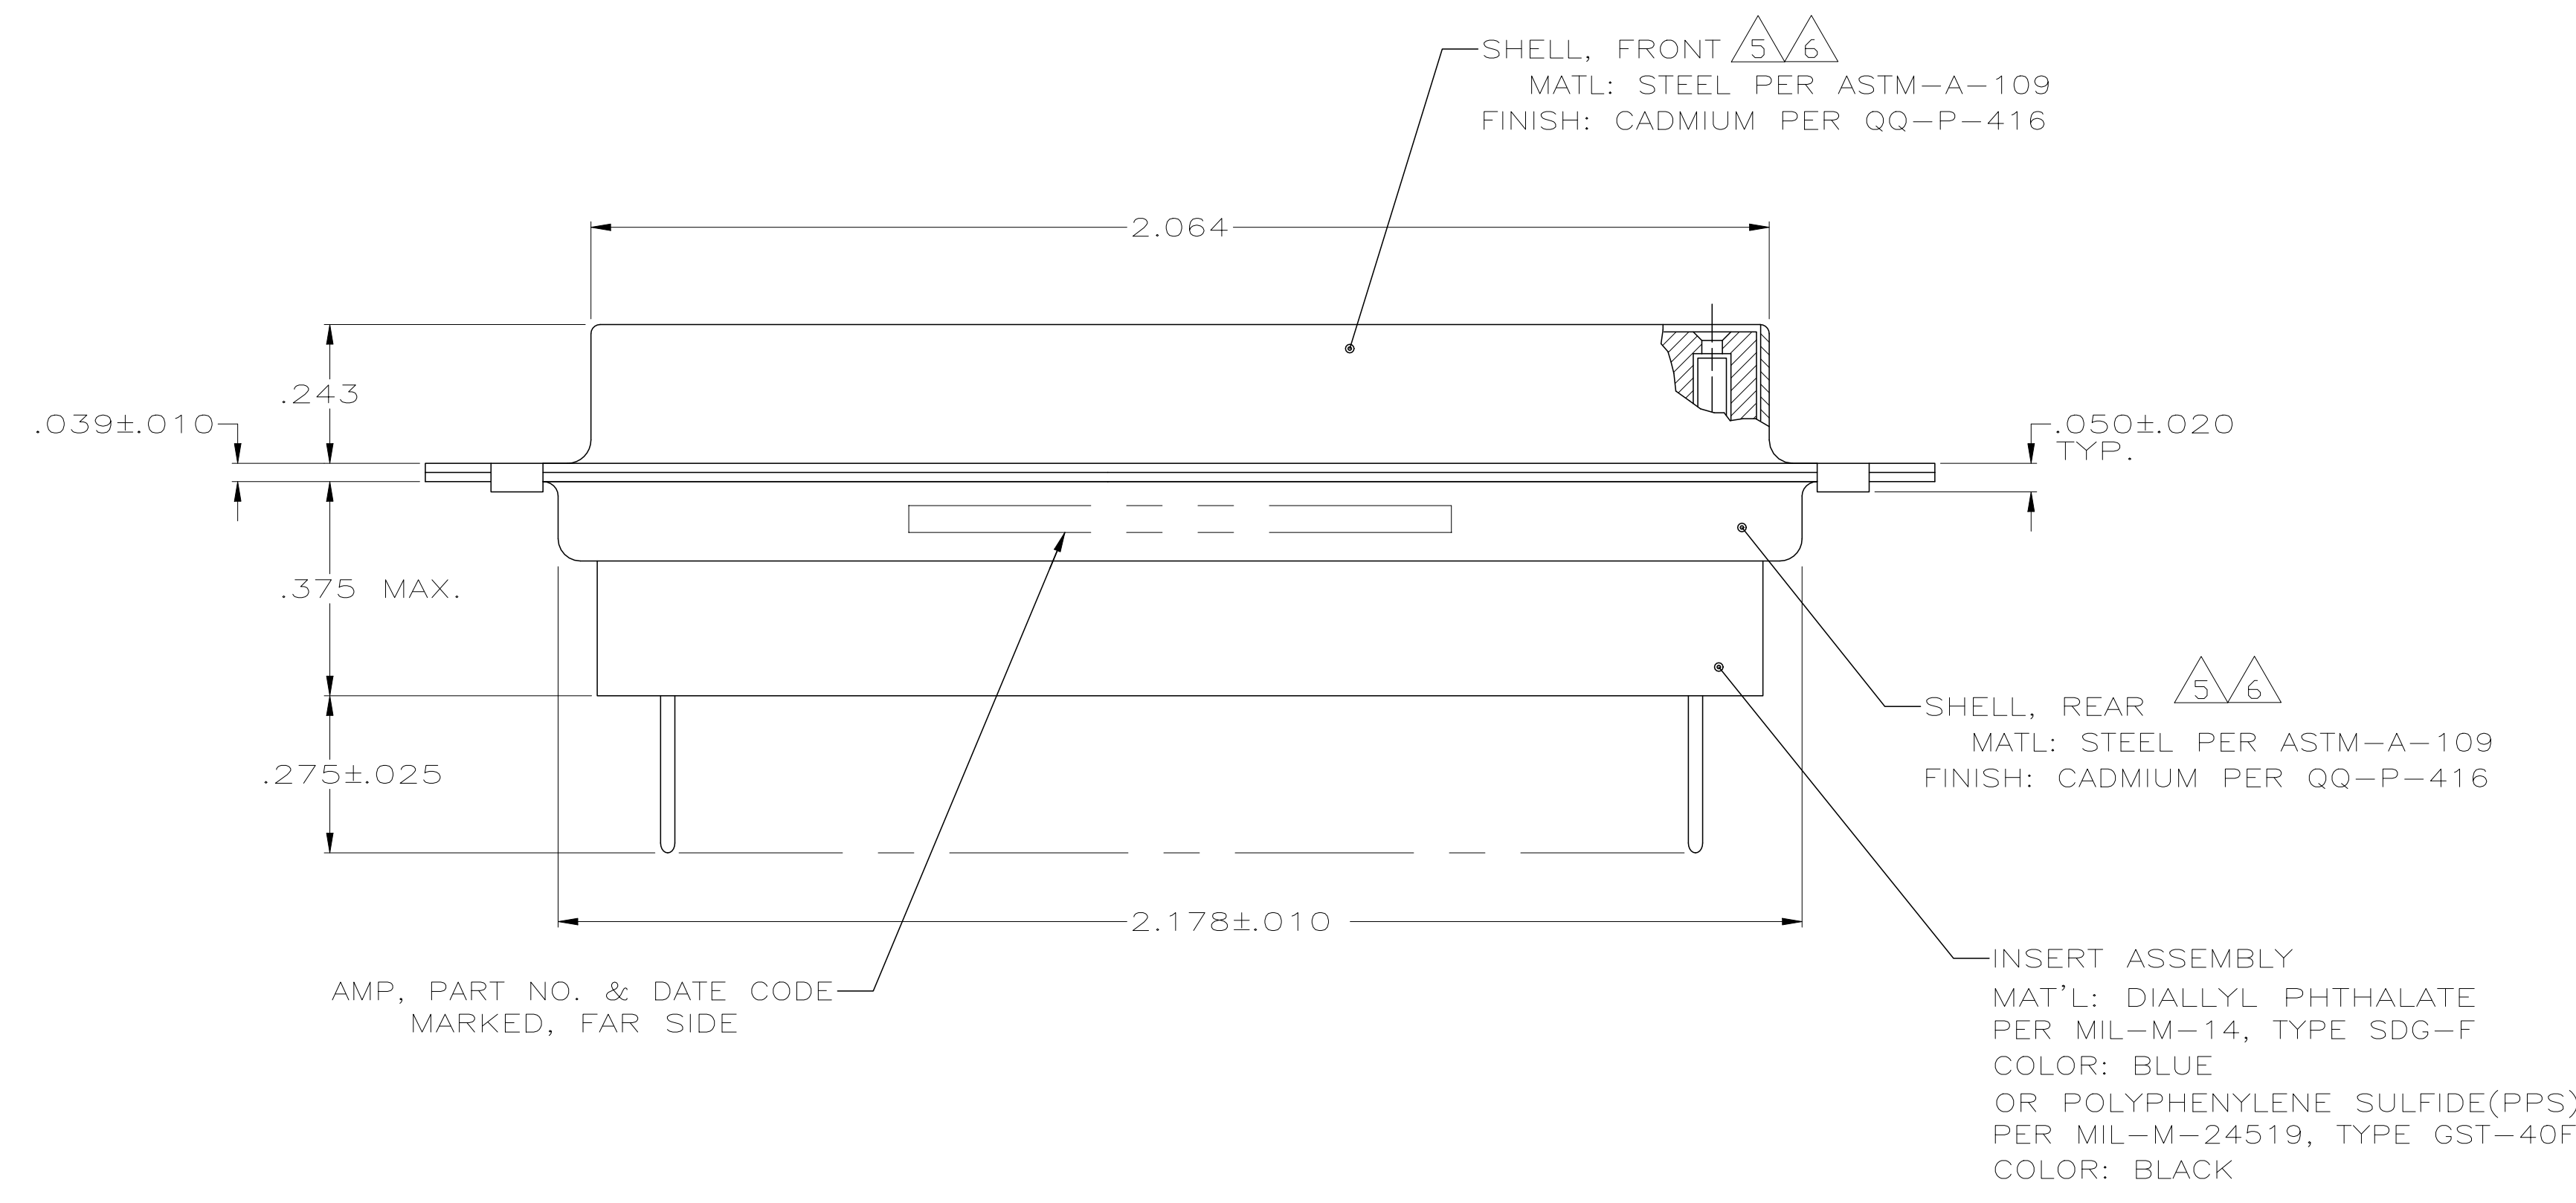
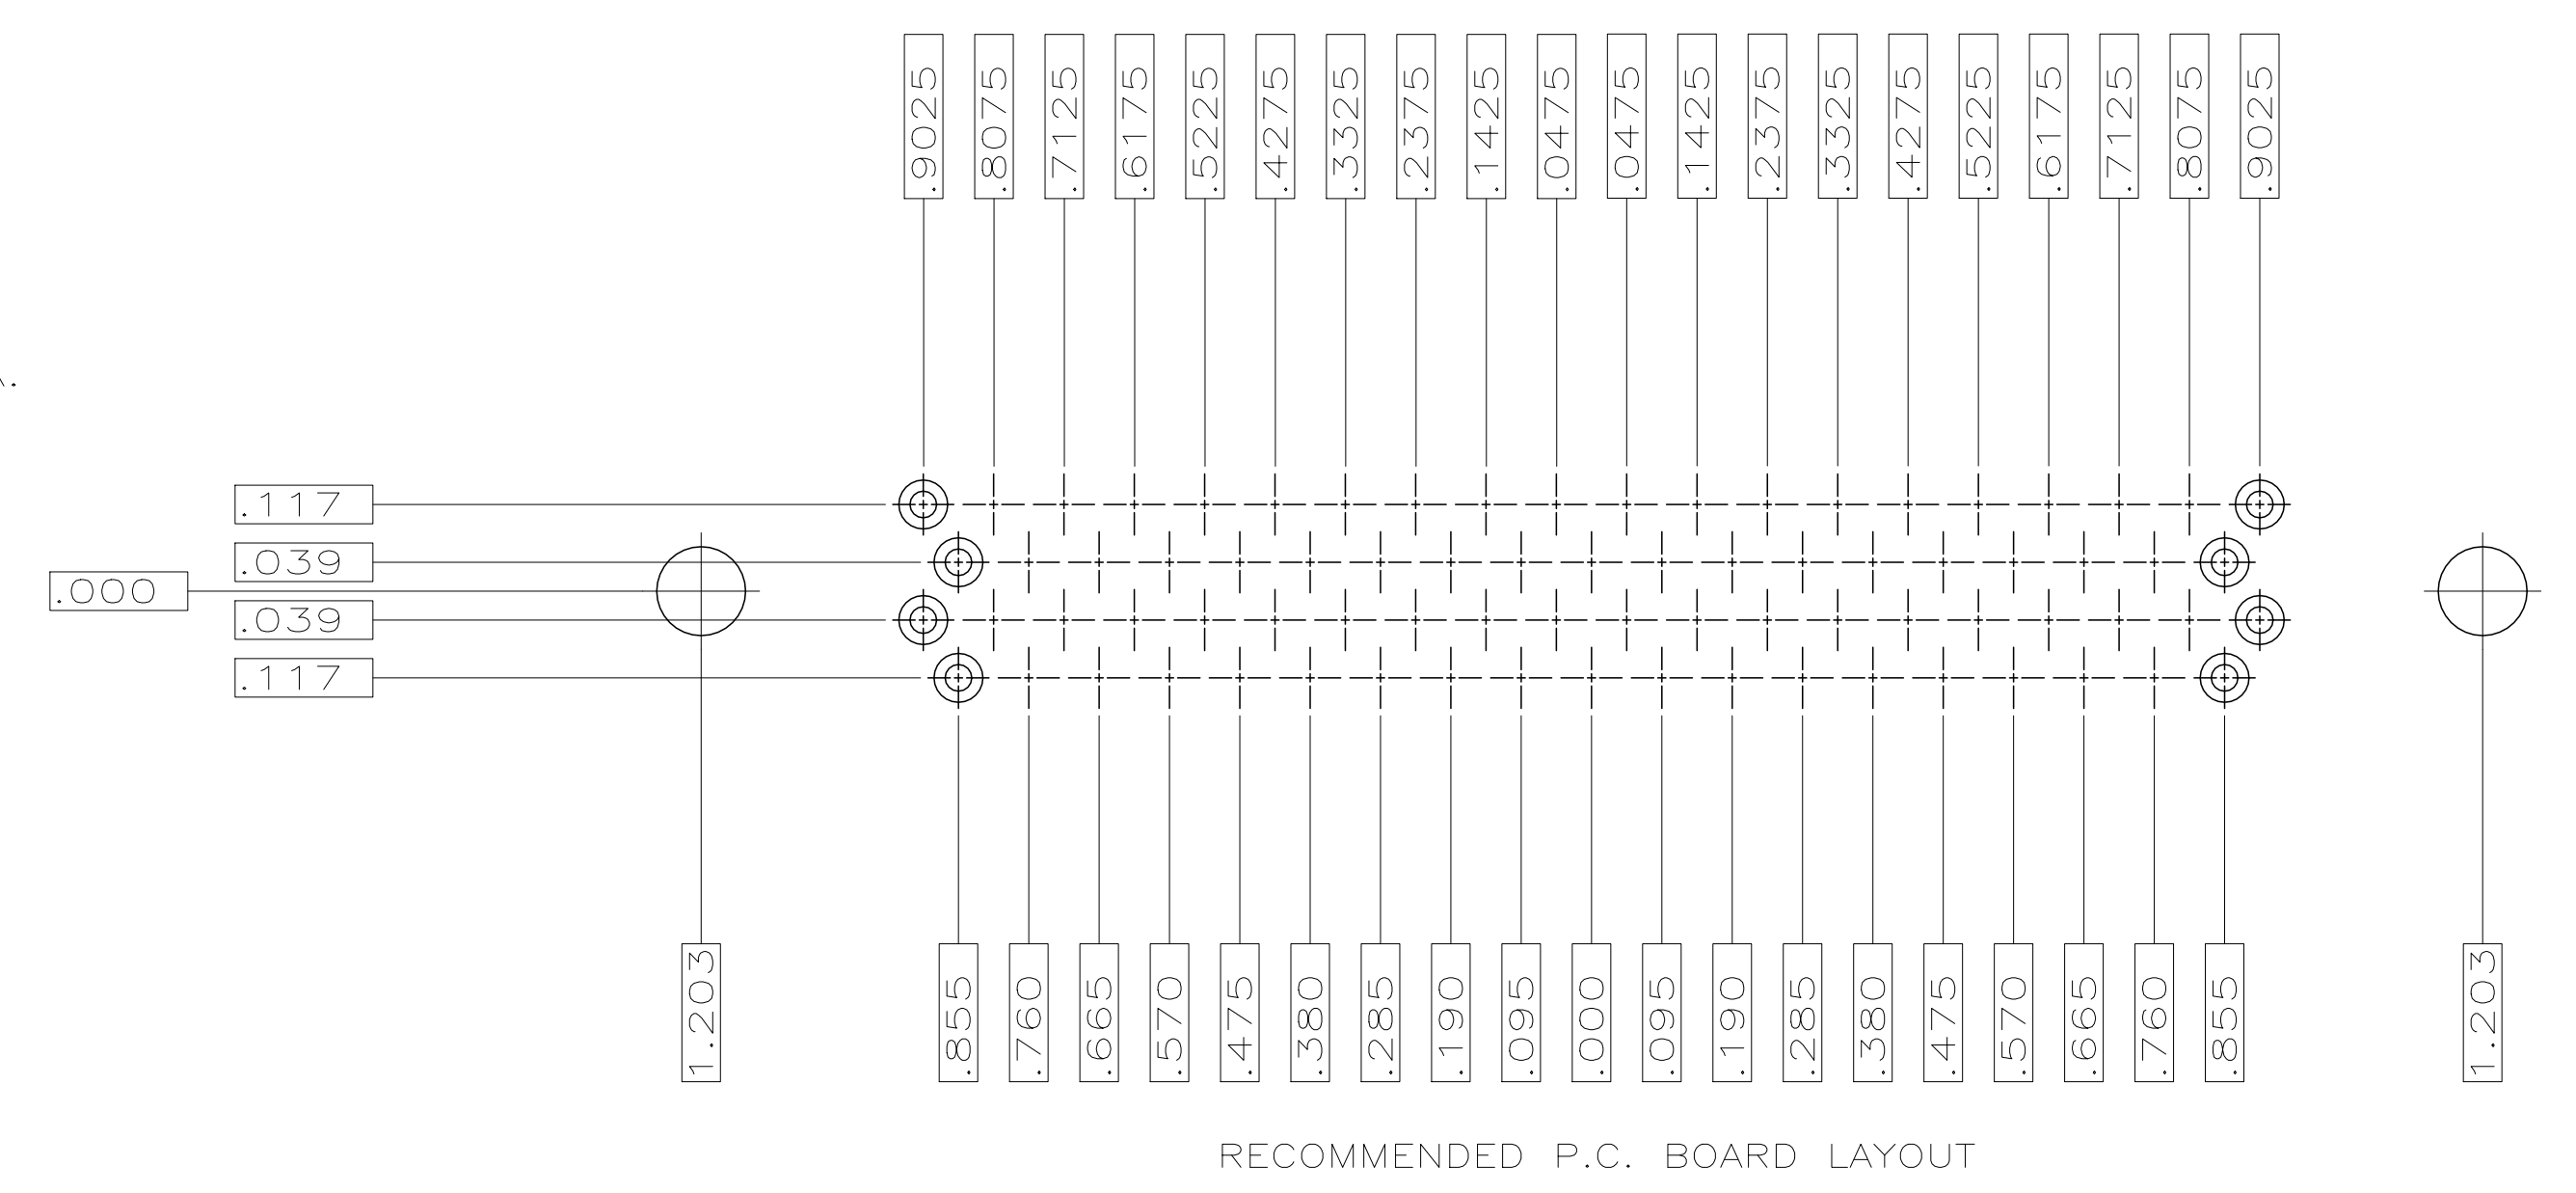


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
J	REV PER ECO	21-007560	28JUL2021	LN	MD

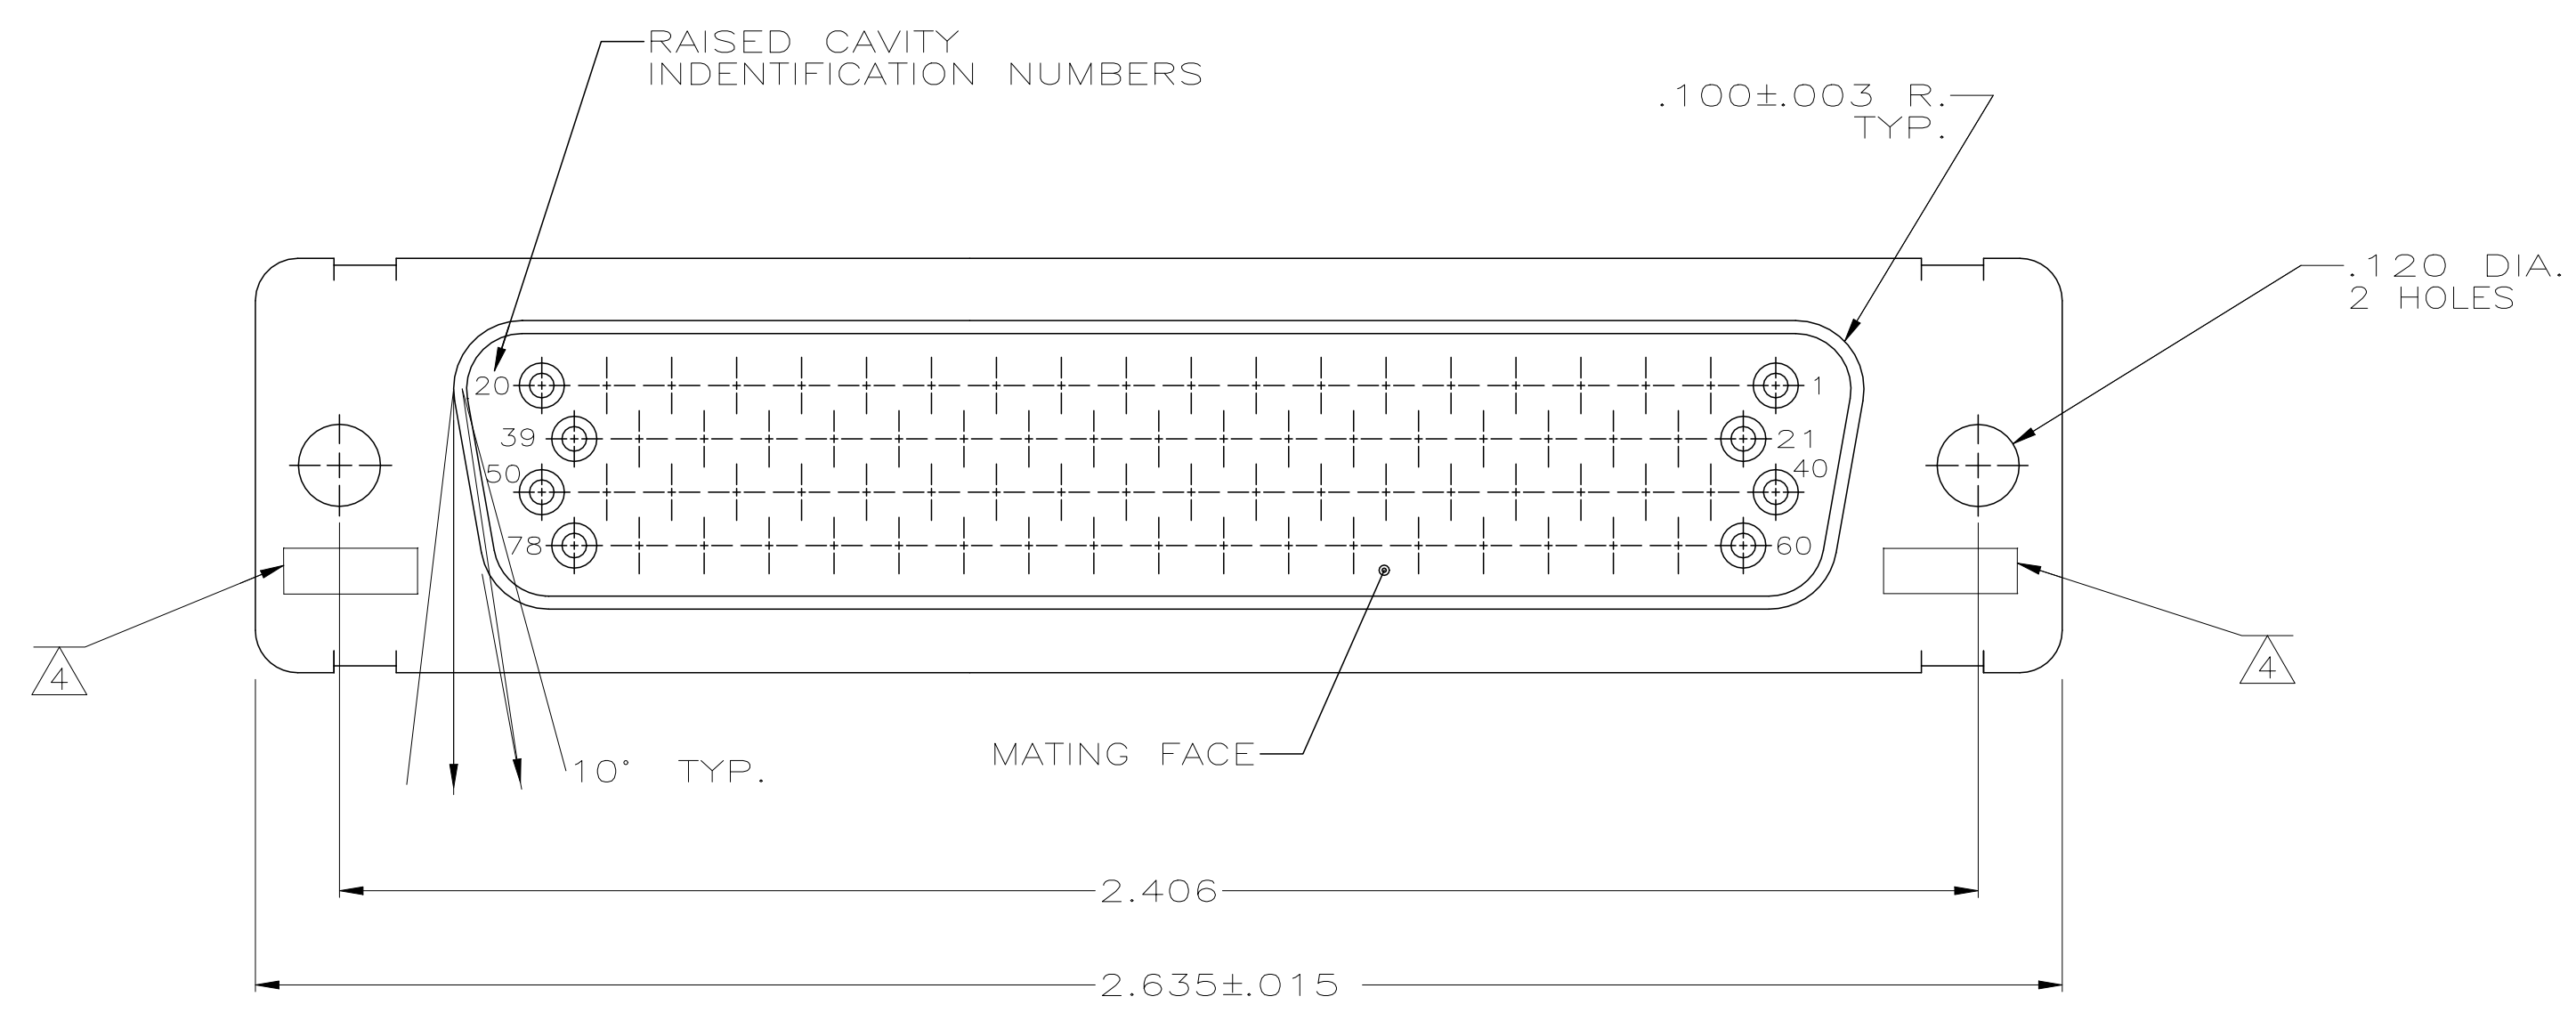

- .040 DIA HOLE IS RECOMMENED FOR P.C. BOARD.
- CONNECTOR MATES WITH ANY AMP 78 POSN PLUG.
- REPLACEMENT SOCKET AMP# 207684-4.
- UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.
- FINISH: CADMIUM PER QQ-P-614.
- FINISH: ZINC PLATE PER ASTM-B-633 .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+).

6	5-208876-1
5	208876-1
REMARKS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	ANGLES ± -				
MATERIAL: SEE CALLOUTS	FINISH: SEE CALLOUTS	WEIGHT	0.000000	SIZE	A1	CAGE CODE	00779	DRAWING NO	208876	RESTRICTED TO	-
CUSTOMER DRAWING			SCALE	4:1	SHEET	1	OF	1	REV	J	

APPROVED: C.C. THOMAS (1-8-88), F.C. BALLEW III (1-25-88)

TE Connectivity

AMPLIMITE 78 POSN. RCPT. ASSY., WITH LOADED POSTED CONTACTS, SIZE 5, SERIES 90