

25-30 Watts

Total Power: 25 Watts for Single, 30Watts for Dual output
Input Voltages: 48 V, 24V
No. of Outputs: Single, Dual

ALT ALT Dual



Special Features

- 25W Single and 30W Dual output
- 2:1 Input range
- Open Frame package
- 1.6" X 2.0" X 0.48"
- Positive and Negative enable function
- Industry standard package

Environmental

Operating temperature
-40°C to +55°C (ambient temperature)
Storage temperature: -55°C to +125°C
MTBF: 2 million hours (Bellcore TR332)

Safety

UL 1950 Recognized
CSA CSA22.2 - 950
VDE EN60950 Licensed

Electrical Specs

Input

Input range 48Vin:36-75 VDC
24Vin: 18 - 36VDC
Input Surge 48Vin: 100V / 100ms
24Vin: 50V / 100ms
Efficiency 87%@5.0V (Typical)

Control

Enable TTL compatible
(positive & negative enable options)

Output

Regulation
Line <0.2%
Load <0.5%
Ripple & Noise 75mV p-p for 3.3V and 5V of 48Vin
100mV p-p for 3.3V and 5V of 24Vin
150mV p-p for 12V and 15V
150mV p-p for dual output
Output voltage adjust range +/-10% of nominal output
Transient Response 3% max deviation with 50% to 75% full load
200 μS (max) recovery for 48Vin
300 μS (max) recovery for 24Vin
Overvoltage Protection 19V for 15V output
16V for 12V output
7V for 5V output
5V for 3.3V output

Isolation

I/O isolation 1500VDC (Basic insulation)

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 Telephone: 852-2176-3333
 Facsimile: 852-2176-3888




Ordering Information

ALT06/ALT-Dual


Input Voltage	Output Voltage	Efficiency	Model Number
48V	3.3V @ 6A	85% (Typ)	ALT06F48
48V	5.0V @ 5A	87% (Typ)	ALT05A48
48V	12V @ 2.1A	87% (Typ)	ALT02B48
48V	15V @ 1.67A	87% (Typ)	ALT01C48 (EOL)
24V	3.3V @ 6A	83% (Typ)	ALT06F24
24V	5.0V @ 5A	85% (Typ)	ALT05A24
Dual output			
48V	5.0V @ 3A	84% (Typ)	ALT03AA48 (EOL)
48V	12V @ 1.25A	87% (Typ)	ALT01BB48 (EOL)

Pin Assignments

Single Output

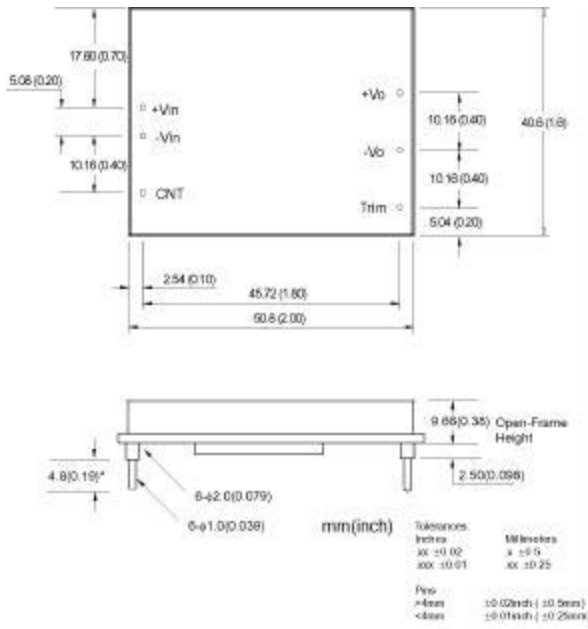

Dual Output

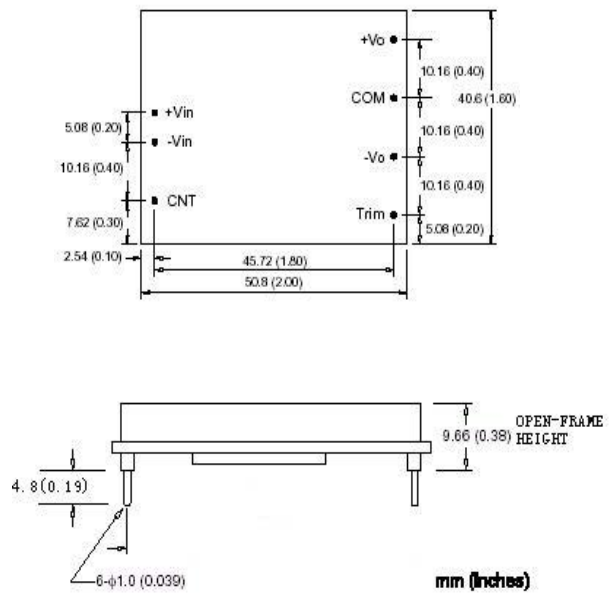

Astec Industry Standard