DIMENSIONS mm (inches)

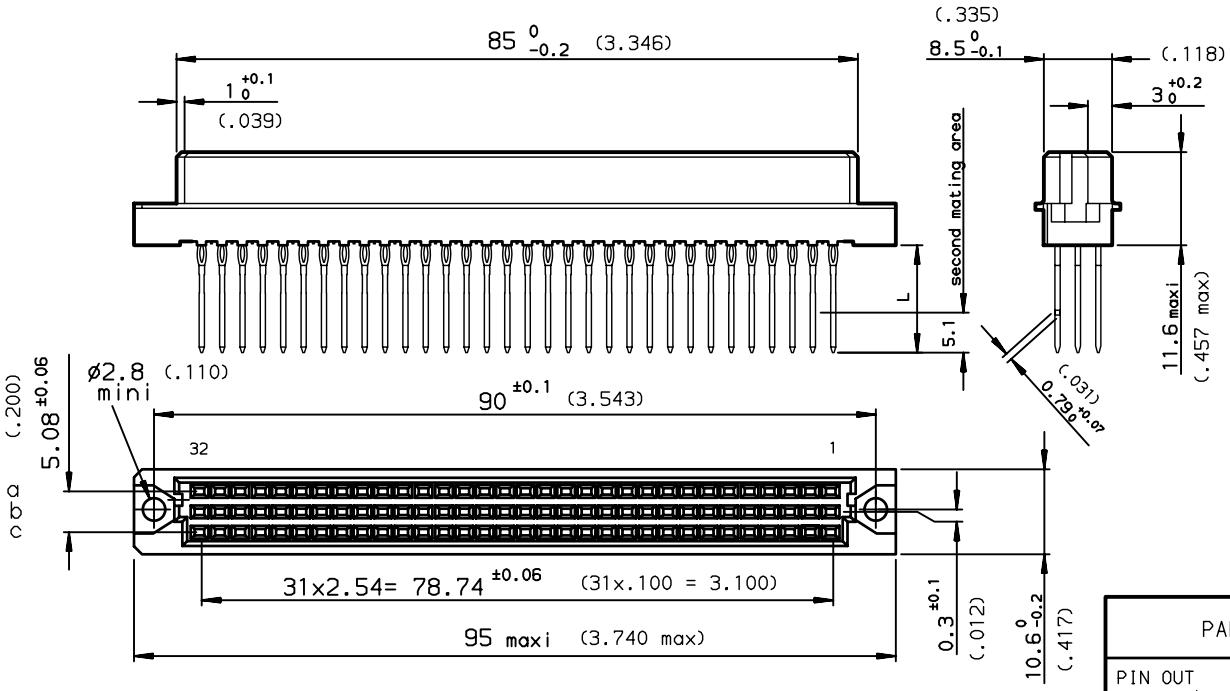

METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PCB DRILLING

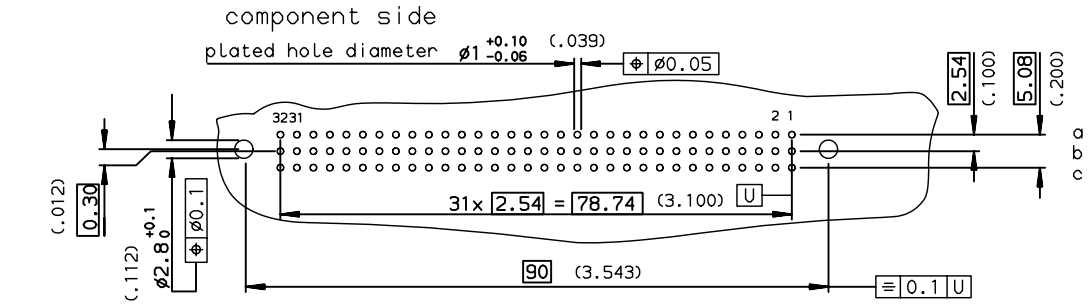

PART NUMBER	8609		81		7		5	
PIN OUT								
rows a-b-c		3		96				
rows a-c		4		64				
NUMBER OF CONTACTS								
TERMINATION								
L = 13.10 ±0.20(.515) rear plug up				96				
L = 17.10 ±0.20(.673) rear plug up + 1 wrap				97				
PERFORMANCE CLASS								
DIN 41612 class 3						4		
DIN 41612 class 2						5		
DIN 41612 class 1						6		
TERMINATION TYPE								
TIN LEAD							000A	
LEAD FREE							ALF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

rev	ecn no	dr	date
–	–	MAS	1999/08/05
F	LS05-004	JTA	2005/02/28
G	LS06-0095	LGO	2006/06/17
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101 | projection | mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	ROUILLARD	1993/06/16	ANGULAR	LINEAR 0.X	±0.1
Eng	TARON	1993/06/16		0.XX	±0.1
Chr	LEGARE	1993/06/16	0.XX° ±2°	0.XXX	±0.1
Appr	LEGARE	1993/06/16	Product family	DIN 8609	Spec ref –

size A3 | Scale 1.5 | ECN LS06-0095

title: STRAIGHT FEMALE - STYLE C
PRESS FIT REAR PLUG UP

dwg no C-8609-0366 | Rev. G

catalog no – | CUSTOMER | sheet 1 of 1

Copyright FCI.

REV F - 2006-04-17

PDM: Rev:G STATUS: Released Printed: May 14, 2011