


- NOTES:**
- MATERIALS:**  
 HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED  
 FRONTSEALING: SILICONE VMQ BLUE  
 CABLE SEALING: NBR BLACK  
 JACK-SCREW: STAINLESS STEEL  
 O-RING: NBR BLACK  
 CABLE STRAIN RELIEF: STEEL, NI-PLATED  
 SCREWS: STEEL, NI-PLATED  
 SHIELDING BRACKET: CU-ALLOY, NI-PLATED
  - TEMPERATURE RANGE: -30°C TO +80°C
  - RECOMMENDED TORQUE FOR SCREW:  
 35Ncm (3.1 in.LB)  
 MAX. TORQUE: 68Ncm (6 in.LB)
  - SINGLE PACKED

\* COMPLETELY TIGHTENED

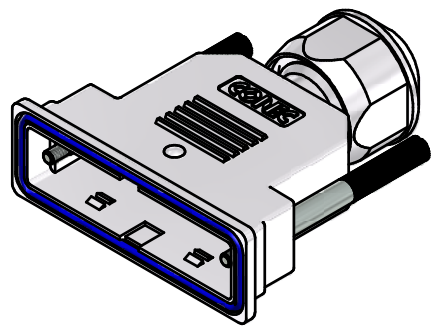

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			dim. in mm	scale: 1,5:1 (1:1)	
	±0,3 unless otherw. specified				material: SEE TABLE	
	drawn	07.02.2014	Heinrich	title:		
	appd.	07.02.2014	Huether	WATER RESISTANT D-SUB HOOD		
	norm			25 pos. shielded		
d-old	15K1A1154		4-40UNC jackscrew / stainless steel			
1 x b	Ä 5092	12.03.14	Heinrich	dwg no:		DIN-A3
a	Origin			15K1A1440		sh: 1
rev.	description	date	name	part no:		15-004780

