

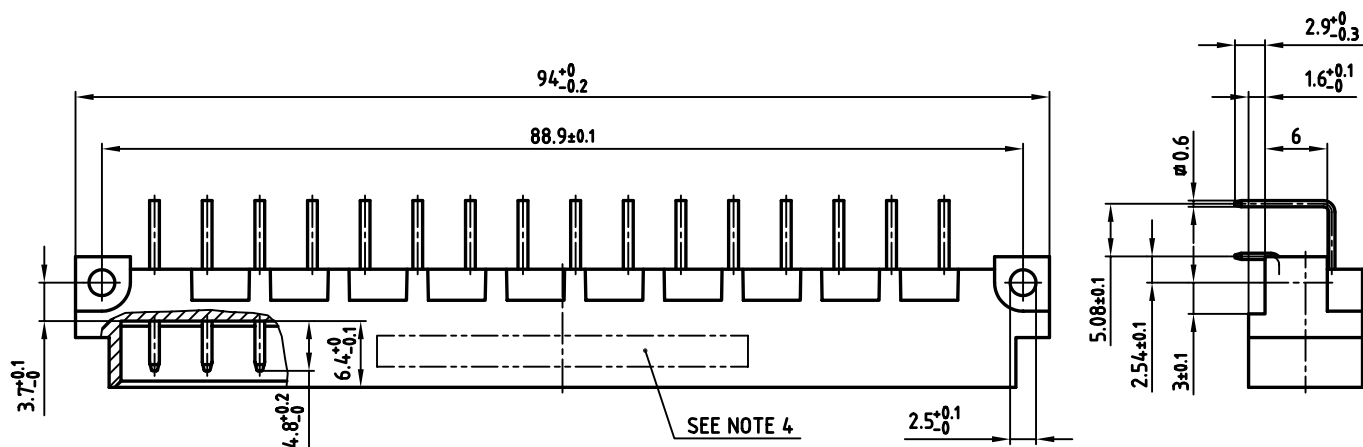


used for: DIN EN 60603 TYPE "D"

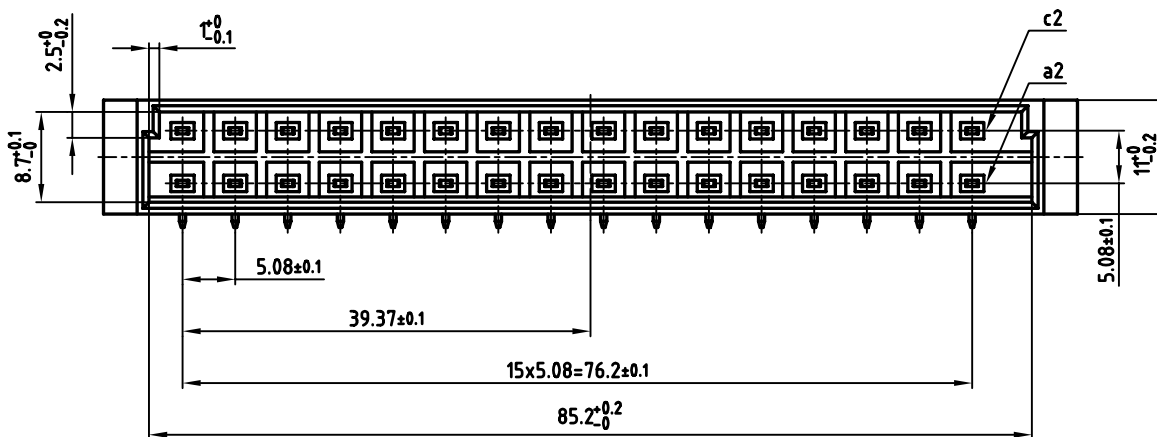

P.C.B.-HOLE DRILLINGS

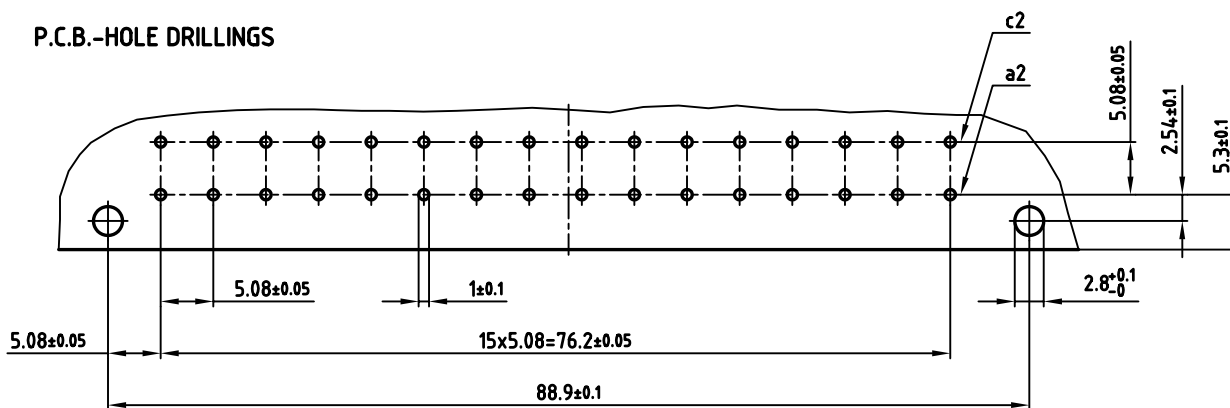

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
3. PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. CONNECTOR IS PART MARKED: 121A10649X CONEC Y/WW



APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	dim. in mm	scale:	2:1
material:	SEE NOTES	material:	SEE NOTES
drawn	2002 date 11.04. name Parei	title:	<b>MALE CONNECTOR TYPE "D"</b>
appd.	11.04. E. Mickenbecker		32pos. angled
norm	DIN EN 60603	dwg no:	AutoCAD 2000 DIN-A
d-old			3
		part no:	121A10649X
			sh: 1/1