


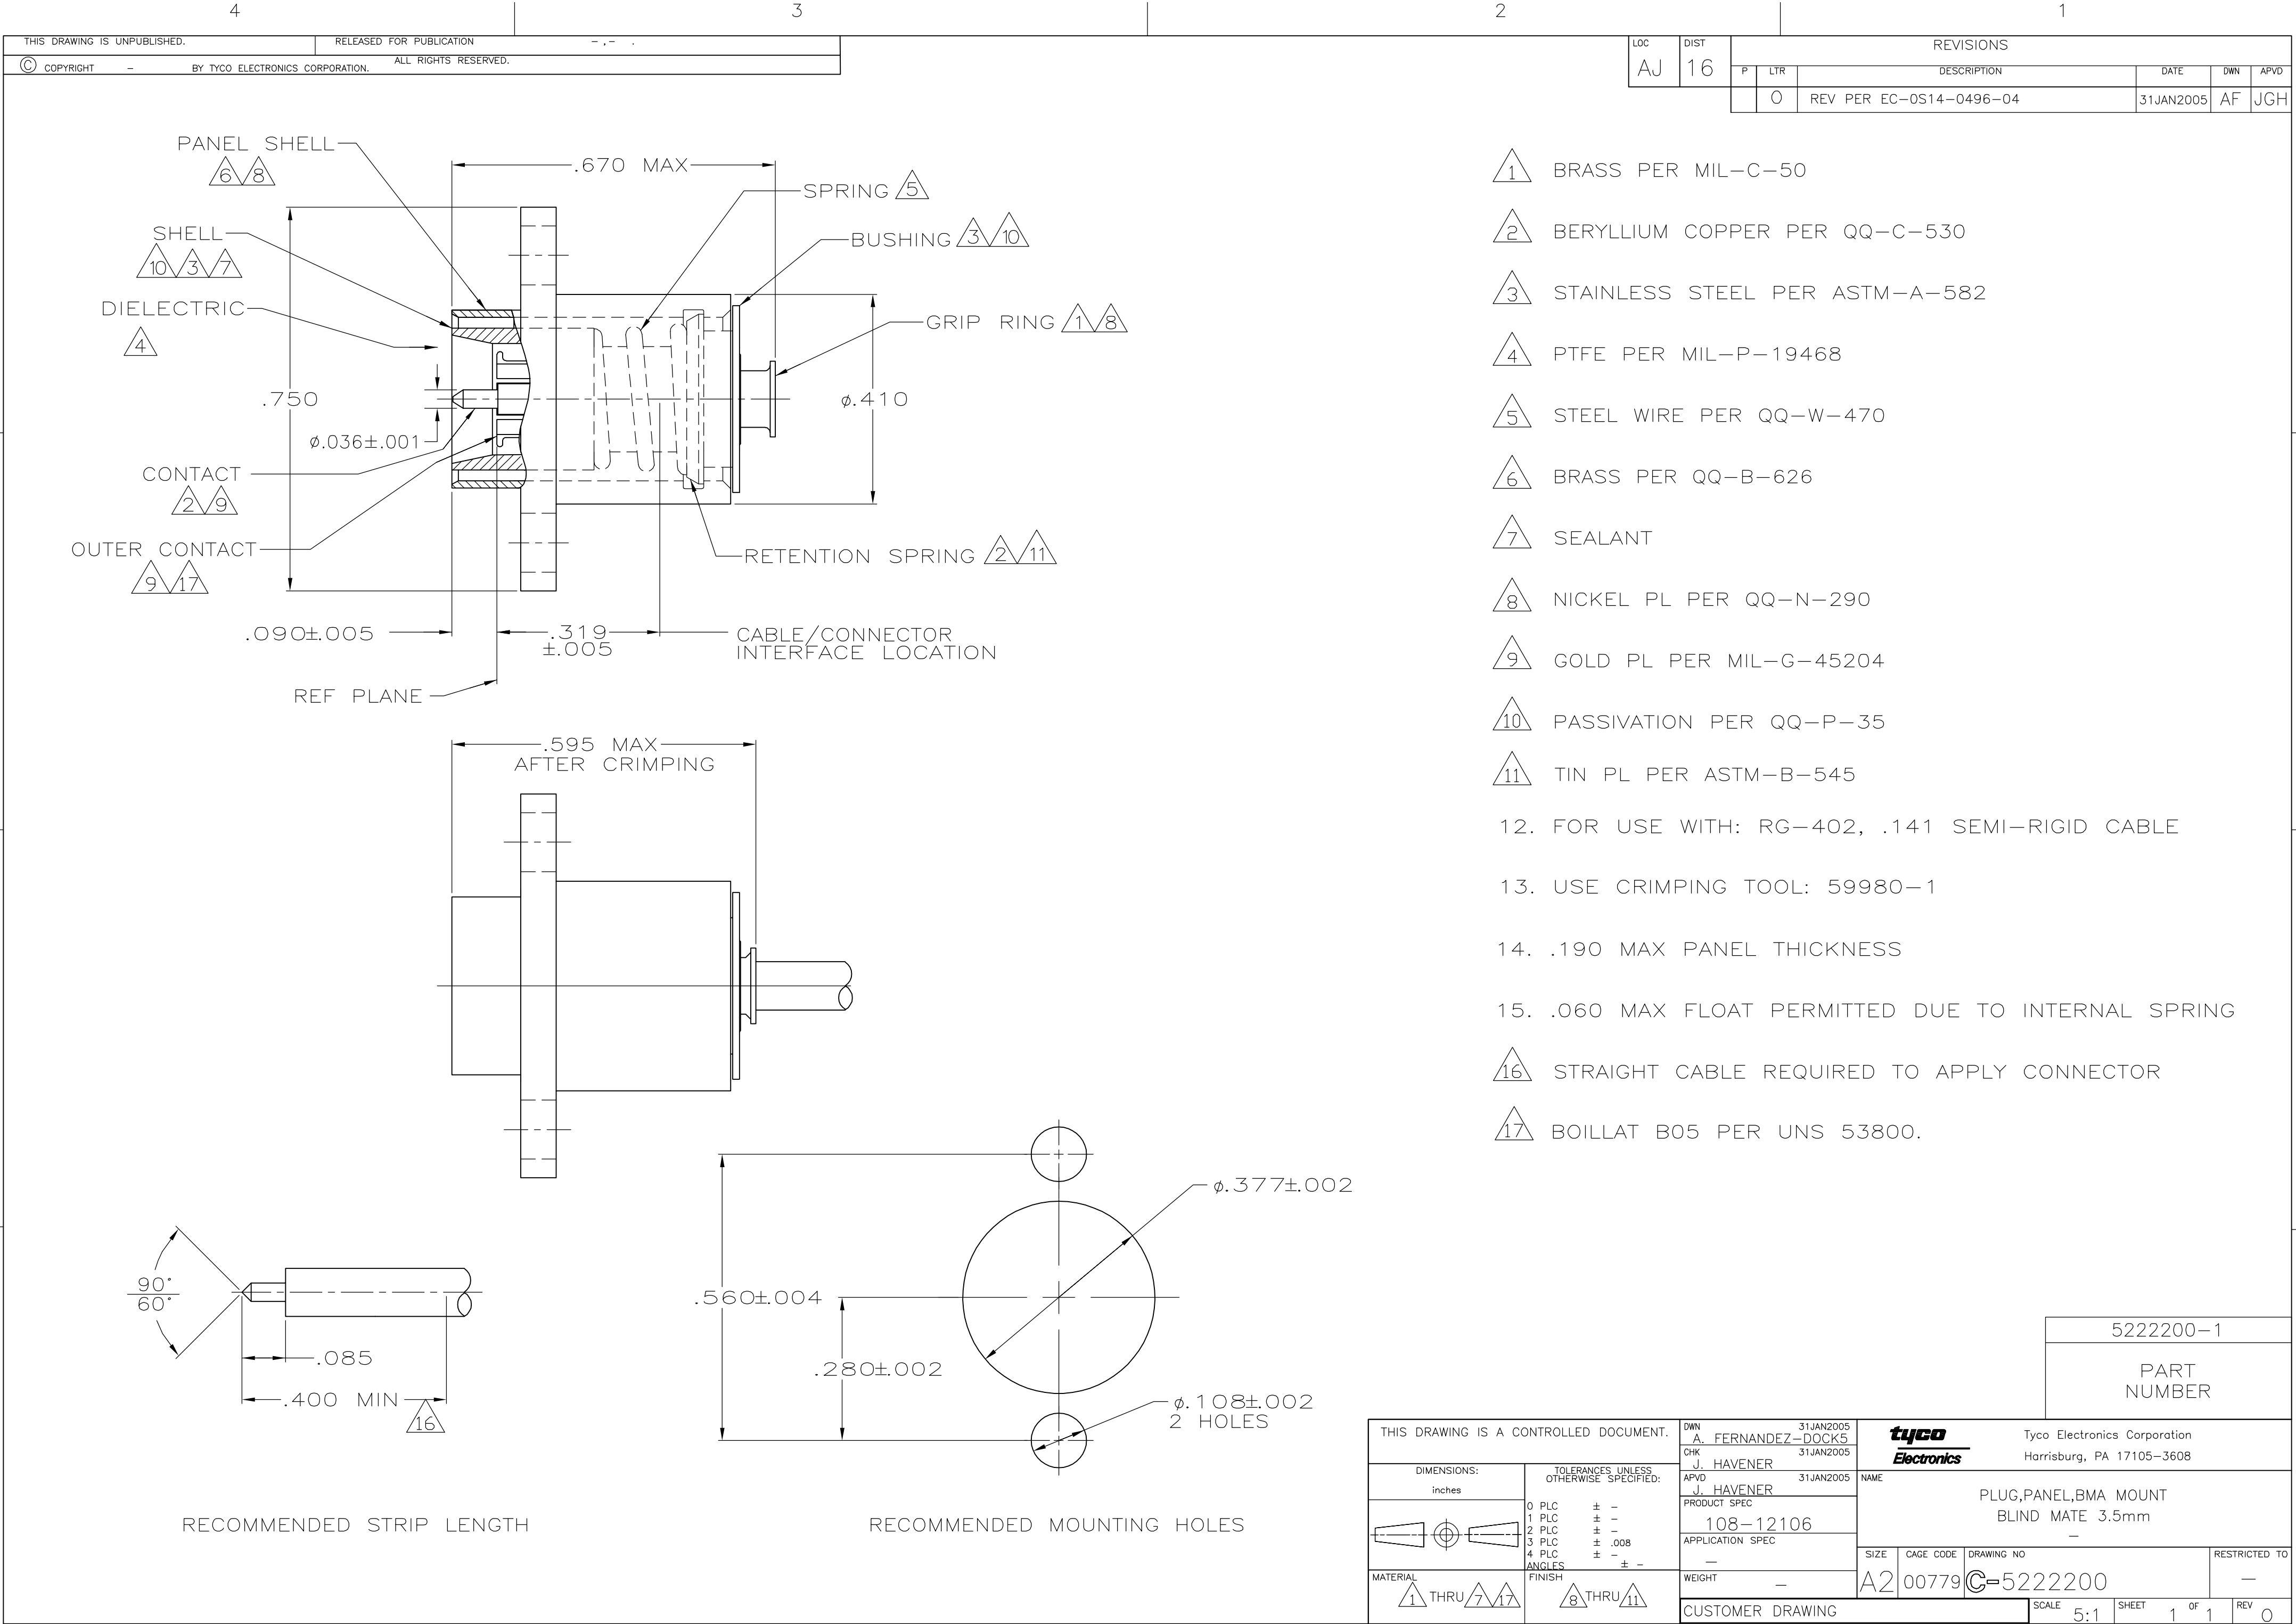

LOC	DIST	REVISIONS			
		P	LTR	DATE	DWN APVD
AJ	16	0		REV PER EC-0S14-0496-04	31JAN2005 AF JGH

- 1 BRASS PER MIL-C-50
- 2 BERYLLIUM COPPER PER QQ-C-530
- 3 STAINLESS STEEL PER ASTM-A-582
- 4 PTFE PER MIL-P-19468
- 5 STEEL WIRE PER QQ-W-470
- 6 BRASS PER QQ-B-626
- 7 SEALANT
- 8 NICKEL PL PER QQ-N-290
- 9 GOLD PL PER MIL-G-45204
- 10 PASSIVATION PER QQ-P-35
- 11 TIN PL PER ASTM-B-545
- 12. FOR USE WITH: RG-402, .141 SEMI-RIGID CABLE
- 13. USE CRIMPING TOOL: 59980-1
- 14. .190 MAX PANEL THICKNESS
- 15. .060 MAX FLOAT PERMITTED DUE TO INTERNAL SPRING
- 16 STRAIGHT CABLE REQUIRED TO APPLY CONNECTOR
- 17 BOILLAT B05 PER UNS 53800.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ-DOCK5 31JAN2005	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: inches		CHK J. HAVENER 31JAN2005				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. HAVENER 31JAN2005	NAME PLUG,PANEL,BMA MOUNT BLIND MATE 3.5mm			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± - FINISH		PRODUCT SPEC 108-12106 APPLICATION SPEC - WEIGHT -	SIZE A2		CAGE CODE 00779	DRAWING NO C=5222200
MATERIAL 1 THRU 7, 17		CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1
8 THRU 11				REV 0		RESTRICTED TO -

5222200

A