

1717269-1 ✓ ACTIVE




Positive Lock | Positive Lock 187

TE Internal #: 1717269-1

Insulation Boots & Sleeves, Insulation Sleeve, Flag, PVC, Blue, Bag,
-40 – 140 °F [-40 – 60 °C], Positive Lock 187

[View on TE.com >](#)

Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Insulation Boots & Sleeves

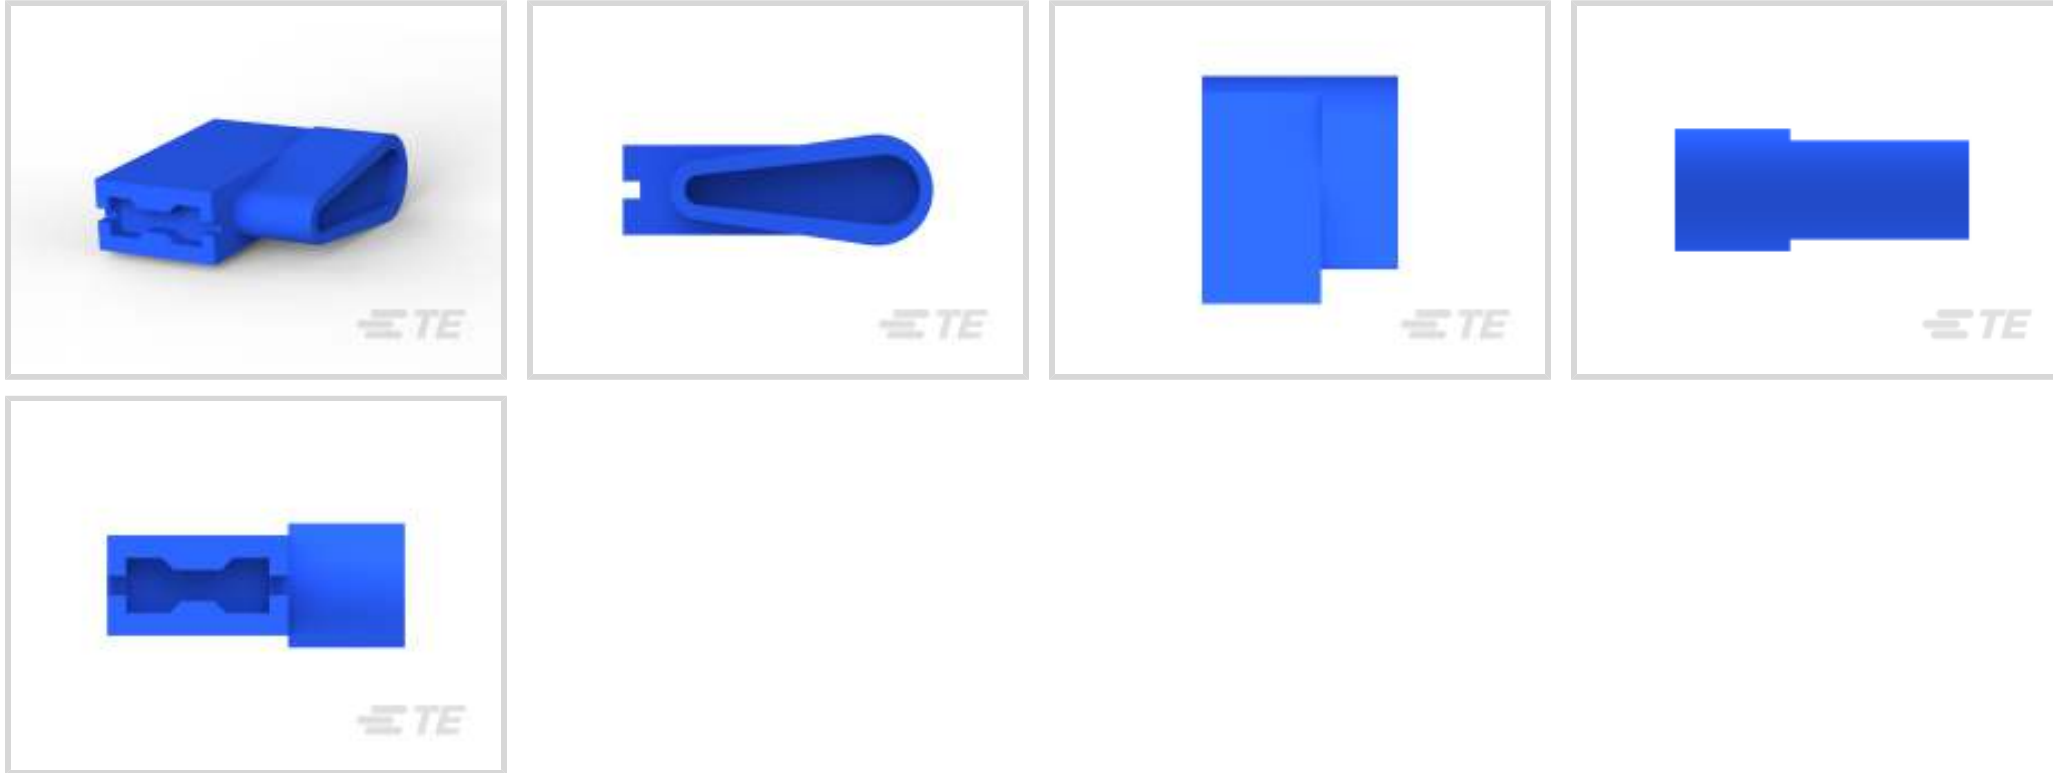

Insulation Boot & Sleeve Product Type: **Insulation Sleeve**

Terminal Orientation: **Flag**

Primary Product Material: **PVC**

Primary Product Color: **Blue**

Packaging Method: **Bag**

Features

Product Type Features

Insulation Boot & Sleeve Product Type	Insulation Sleeve
---------------------------------------	-------------------

Configuration Features

Number of Positions	1
---------------------	---

Body Features

Primary Product Material	PVC
Primary Product Color	Blue

Contact Features

Terminal Orientation	Flag
----------------------	------

Dimensions

Product Length	14.5 mm[.57 in]
----------------	-----------------

Usage Conditions

Operating Temperature Range	-40 – 60 °C[-40 – 140 °F]
-----------------------------	---------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------



Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | [Positive Lock 187](#)



Crimp Terminal Housings(86)



Insertion & Extraction Tools(2)



Insulation Boots & Sleeves(7)



Quick Disconnects(55)

Customers Also Bought



TE Part #DT06-3S-CL08
PLG, 3P, BLK, E, FLANGE CAP



TE Part #2-34567-1
TERMINAL,SOLIS R 16-14HD 10



TE Part #4-2176329-9
CRGP 1210 100K 1%



TE Part #DTM04-12PD
REC, 12P, BRN, N, D



TE Part #DT04-4P-C017
REC, 4P, GRY, BLOCKED




TE Part #WM-12S-B026
WEDGE LOCK, 12P, PLG, GRN, DTM



TE Part #1062-20-0622
SOC, SF, SIZE 20, 14-16, NI/NI



TE Part #1062-20-0322
SOC, SF, SIZE 20, 16-22, SLEVLSS, NI /NI

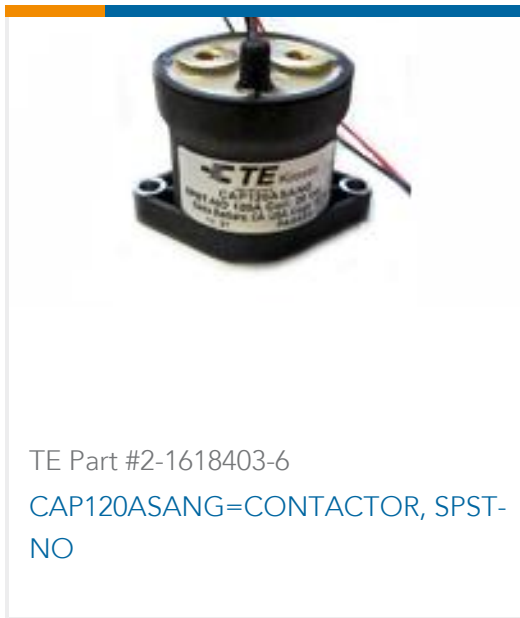

TE Part #2-1618403-6
CAP120ASANG=CONTACTOR, SPST-NO

Documents

Product Drawings

[PL EX 187 INSULATED FLAG REC PVC V-0](#)

Japanese

CAD Files

[3D PDF](#)

3D

[Customer View Model](#)

[ENG_CVM_CVM_1717269-1_A.2d_dxf.zip](#)

1717269-1

Insulation Boots & Sleeves, Insulation Sleeve, Flag, PVC, Blue, Bag, -40 – 140 °F [-40 – 60 °C], Positive Lock 187



English

Customer View Model

[ENG_CVM_CVM_1717269-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1717269-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.