Ceramic Monoblock Duplex Filter

WIRELESS COMPONENTS

Model KFF6567A Technical Data

Features:

- Small Size
- High Performance
- SMD

Description and Applications:

This monoblock Duplexer filter is primarily designed for Cellular Band (CDMA and AMPS) applications at 824-894 MHz.



Rev. 1

Electrical Specifications

TX to Antenna Response	Frequency	Specifications @ 25° C		
Insertion Loss	824 MHz to 849 MHz	2.5 dB max.		
Return Loss @ TX	024 MINZ 10 049 MINZ	10.0 dB min.		
Attenuation	779 MHz to 804 MHz	10.0 dB min.		
Attenuation	869 MHz to 894 MHz	45.0 dB min.		
Antenna to RX Response	Frequency	Specifications @ 25° C		
Insertion Loss	869 MHz to 894 MHz	3.3 dB max.		
Return Loss @ RX	009 WHZ 10 094 WHZ	8.0 dB min.		
Attenuation	824 MHz to 849 MHz	52.0 dB min.		
Attenuation	914 MHz to 939 MHz	20.0 dB min.		
Attenuation	959 MHz to 984 MHz	45.0 dB min.		
Power Rating		3W		
Impedance		50Ω		


NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification	Typical Allowance		
Insertion Loss	0.1dB		
Return Loss	1.0dB		
Stopbands	1.0dB		

С

TS	CORPORATION	/ MAN	UFACTURER	ΟF	RELIABLE	ELECTRONIC	COMPONENTS

Typical Response Curve

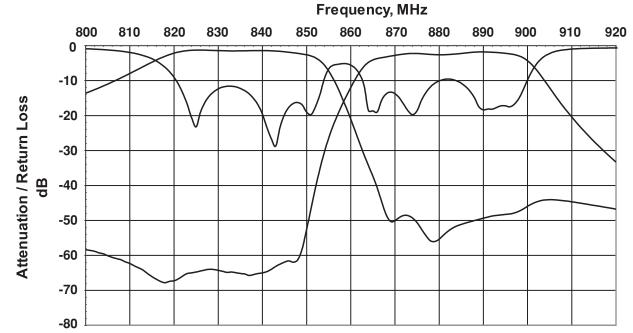

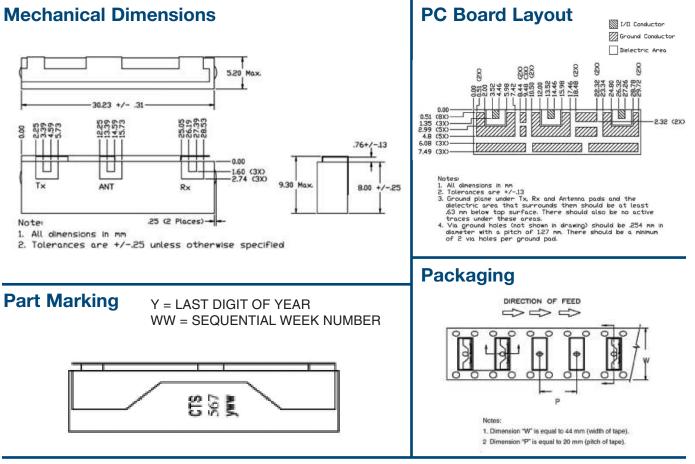

Contact Information:

CTS WIRELESS COMPONENTS, INC. / 171 Covington Drive / Bloomingdale, IL 60108 PHONE: (800) 757-6686 / www.ctscorp.com

Document Control #6287114Y01 Rev. 1 Date of Origin 02/15/02 Date of Revision 02/15/02

THIS DATA SHEET IS NOT AN OFFER FOR SALE AND SHALL NOT OBLIGATE CTS TO SELL THE PRODUCTS DESCRIBED HEREIN OR ANY OTHER PRODUCTS. CTS MAY, IN ITS SOLE DISCRETION, MODIFY OR DISCONTINUE THE SALE OF ITS PRODUCTS AT ANY TIME WITHOUT NOTICE. CTS MAKES NO WARRANTY, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE PRODUCTS REFERENCED OR INFORMATION PROVIDED HEREIN.