

Pilot Lights - 22 mm

M22

22-mm dia. and 25-mm dia. Round and Square Indicators

- Locking lever ensures easy mounting and removal of switch unit
- Use optional 25-mm dia. ring to install in 25-mm dia. panel cutouts
- Finger protection mechanism on Lamp Unit provided as a standard feature
- IP65 oil resistant: EN60947-5-1










This product was manufactured at OMRON Izumo. OMRON Izumo has obtained approvals from international certification bodies for its quality system and environmental control system.

Ordering Information _____


■ CONSTRUCTION

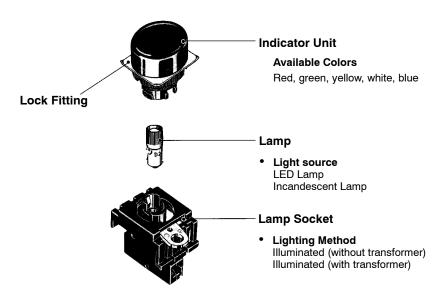

(Actual color of yellow pushbuttons more closely resembles amber than true yellow.)

■ PART NUMBER LEGEND

Shipped as a set which includes the Operational Unit, LED, and Lamp Socket.

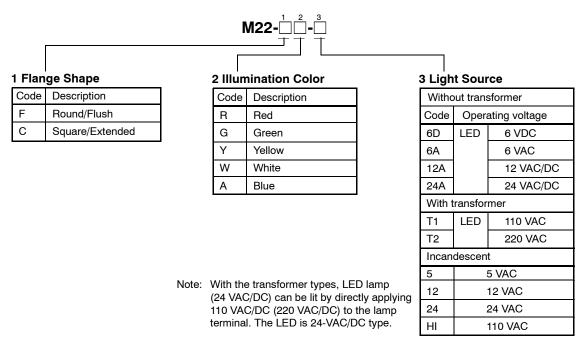

(Actual color of yellow pushbuttons more closely resembles amber than true yellow.)

■ M22 INDICATOR

Appearance		Lighting	Rated voltage	Operator color	Part number
Round/Flush Without transformer		LED	6 VDC	Insert one of the following letters into the box □. R (red) Y (yellow) G (green) W (white) A (blue	M22-F□-6D
			6 VAC		M22-F□-6A
			12 VAC/DC		M22-F□-12A
			24 VAC/DC		M22-F□-24A
Round/Flush With transformer		LED	110 VAC		M22-F□-T1
			220 VAC		M22-F□-T2
Square/Extended Without transformer		LED	6 VDC		M22-C□-6D
			6 VAC		M22-C□-6A
			12 VAC/DC		M22-C□-12A
			24 VAC/DC		M22-C□-24A
Square/Extended With transformer		LED	110 VAC		M22-C□-T1
			220 VAC		M22-C□-T2

Note: To order Incandescent versions of the M22 Pilot Light, replace the last two digits in the part number (ie, 12A, 24A, T1) with the appropriate code from table 3 of the Part Number Legend at the top of the page.

Example: M22-FR-24 is a red, round indicator with 24 VAC incandescent light source.

Specifications _

■ RATINGS

LED Lamp

Rated voltage	Rated current	Operating voltage
6 VDC	60 mA	6 VDC±5%
6 VAC/DC	60 mA	6 VAC/DC±5%
12 VAC/DC	30 mA	12 VAC/DC±5%
24 VAC/DC	15 mA	24 VAC/DC±5%

Incandescent Lamp

Rated voltage	Rated current	Operating voltage
6 VDC	200 mA	5 V
14 VAC/DC	80 mA	12 V
28 VAC/DC	40 mA	24 V
130 VAC/DC	20 mA	100 V

Transformer Lighting

Rated voltage	Operational voltage	Applicable lamp (BA9S/13□ gold)
110 VAC	95 to 115 VAC	LED Lamp (A22-24□)
220 VAC	190 to 230 VAC	

■ APPROVED STANDARDS

Recognized organization	Standards	File No.
UL, cUL (See note)	UL508	E41515
ASTA	EN60947-5-1	_


Note: UL: CSA C22 No. 14


Dimensions

Unit: mm (inch)

■ INDICATORS


Flush M22-F



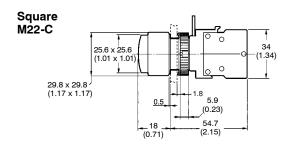

■ TERMINAL ARRANGEMENT

Terminal Arrangement (Bottom View)

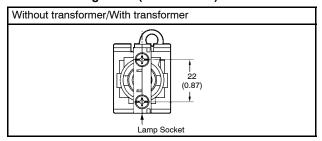

■ TERMINAL CONNECTION

Without transformer	With transformer
Bottom view	Top view
(+) (×)	₩ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\
(-)	@_w_L

■ PANEL CUTOUT DIMENSIONS





Note: When applying a coating such as paint to a panel, the dimensions should be those after the application of the coating. A lock fitting is provided as a standard item.

Note: For additional specifications and information refer to the Common to all assemblies section at the end of this publication.

 ${\bf NOTE: DIMENSIONS\ SHOWN\ ARE\ IN\ MILLIMETERS.\ To\ convert\ millimeters\ to\ inches\ divide\ by\ 25.4.}$

ONRON ELECTRONICS LLC

One East Commerce Drive Schaumburg, IL 60173

1-800-55-OMRON

OMRON ON-LINE

Global - http://www.omron.com USA - http://www.omron.com/oei Canada - http://www.omron.com/oci **OMRON CANADA, INC.** 885 Milner Avenue Scarborough, Ontario M1B 5V8

416-286-6465