


NUMBER
C-811034

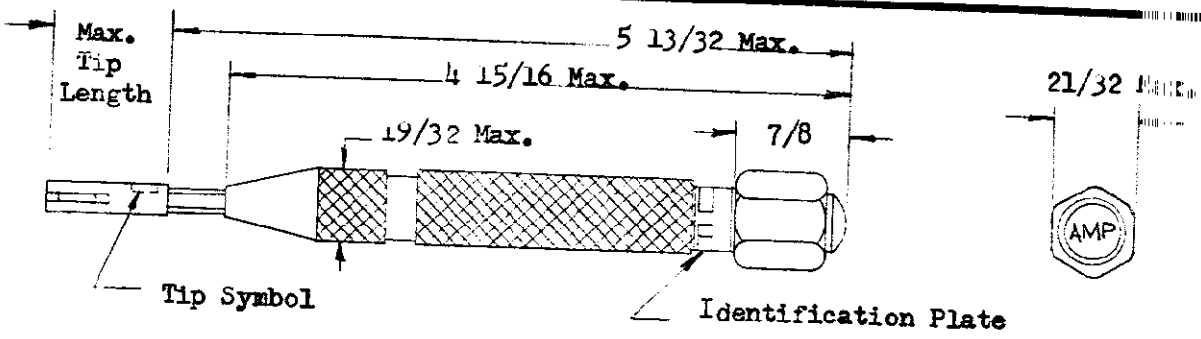

<u>Tool Number</u>	<u>Trip Force</u>	<u>Tip Number</u>	<u>Tip Symbol</u>	<u>Tip Length</u>
811034-1	12-13	811033-1	M1	1 9/32
811034-2	12-13	811033-2	M2	1 9/32
811034-3	12-13	811033-3	M3	1 9/32
811034-4	12-13	811033-4	M4	1 9/32

APPLICATION TOOLING ENGINEER
CONNECTOR PRODUCTS DIV.

1. For Tool usage, see Instruction Sheet # 7081.
2. For Tip dimensions, see Tip Customer Drawing.
3. For readjustment or replacement of parts other than Tips, return Tool to AMP, INC., Mt. Joy, Penna. to insure proper calibration.
4. Trip force is the force in pounds, required to trip the tool.

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

PRINT DIST

				©1961 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER CO REFERENCE ON	
				MATERIAL AND FINISH Steel-Plated; Aluminum		AMP AMP INCORPORATED HARRISBURG, PENN.	
				Weight 3½ ± 1½ Oz.		CLASS	
A-1 Loc. M was R				PP	-	8/10/70	
A REV. & REDRAWN				YES	X	1/10/70	
LTR REVISION RECORD				DR	CHK	DATE	
DR 4 E Smith 12/19/69				DE		1/9/70	
CHK				APP		1/7/70	
TOLERANCE EXCEPT AS NOTED ± 0.15 ± 1°				SCALE		LOC NO	
				M A		C-811034	
NAME				TOOL - STANDARD CERTI-LOK INSERTION			