


1. Wiring Diagram.

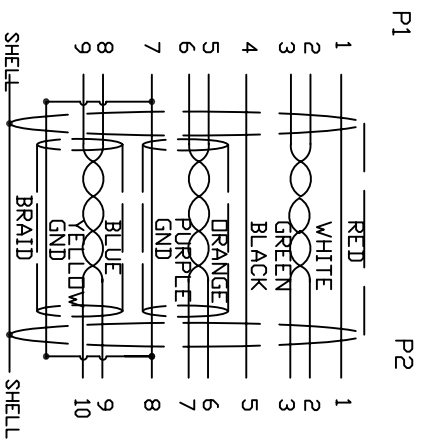

P1 P2

2. Cable test condition :

- Open / Short : 100%
  - Insulation resistance : 5M ohms
  - Contact resistance : 2 ohm
  - Hipot : DC 300V / 1 sec
3. Each pcs with PE polybag.

5	CONN	USB3.0 MICRO B MALE G/F BLACK	1	P2	A	INITIAL RELEASE	2014/08/28
4	PVC	45P PVC BLACK OVERMOLD	25g		REV ECH#		
3	PE	LLDPE 500026 6201	16g		<b>Cnc Tech, LLC</b> DRAWN: WENC DATE: 08/24/14 CHECKED: EDWIN DATE: 08/24/14 APPROVAL:		
2	CONN	USB3.0 A/M G/F BLUE	1	P1			
1	CABLE	《28AWG (7/0.127T) *1P+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *1P+24AWG(7/0.2T)*2C+A+D+B (11/6/0.12AM) OD6.0 BLACK	1	5000mm	P/N:	103-1092-BL-00500	REV A
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	TITLE	CABLE USB3.0 A/M TO MICRO B MALE	
BILL OF MATERIAL							

