

Key data



1x 574A rms at 690V rms, forced air (fan not implemented)

General information

Stacks for various inverter application.

Please read carefully the complete document and maintain the proper design environment!

| | |
|---------------------------|------------------------------------|
| Topology | 1/2 B2I |
| Application / Modulation | Inverter / Sine |
| Load type | resistive, inductive |
| Cooling | forced air (fan not implemented) |
| Implemented sensors | current, temperature |
| Semicond. (Unit 1) | none |
| DC Link | 1.6mF |
| Semicond. (Unit 2) | IGBT 4x FF300R17KE4 |
| Driver signals IGBT | electrical CMOS 0 .. 15V |
| Standards | EN50178, UL94, prepared for UL508C |
| Sales - name | 2PS12017E44G35911 |
| Internal ID | 35911 |
| Mechanical drawing number | 35911_MB |
| Electrical drawing number | 2PS-C4-V |

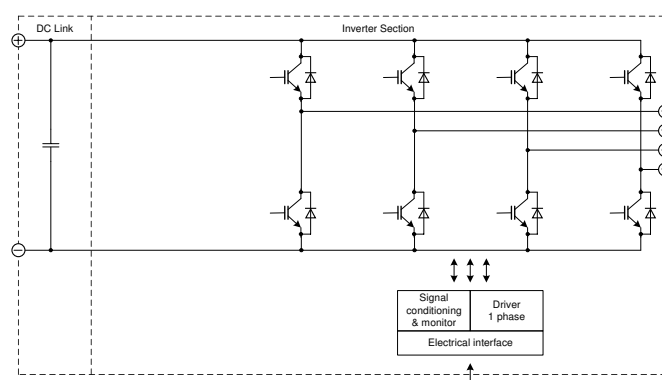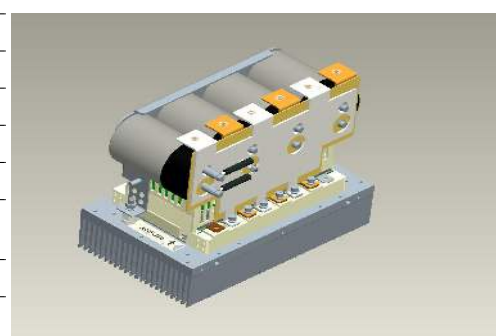

| | |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2016-02-09 |
| approved by: YZ | revision: 2.0 |

Preliminary data

Notes

Overvoltage shutdown must be realized by the customer.

Electrical data

| DC Link | | | min | typ | max | units |
|---------|--|----------|-----|------|------|-------|
| Voltage | | V_{DC} | | 1100 | 1200 | V |

| Unit 2 AC | | | min | typ | max | units |
|----------------------------------|--|----------------------|-------|------|-------|------------|
| Voltage | depending on controller | V_{Unit2} | | 690 | | V_{RMS} |
| Continuous current | $V_{Unit2} = 690V_{RMS}$, $V_{DC} = 1100V$, $T_{inlet} = 40^{\circ}C$, $T_J \leq 125^{\circ}C$, $f_{Unit2} = 50Hz$, $f_{sw2} = 2000Hz$, $\cos(\phi) = 0,85$ | I_{Unit2} | | | 574 | A_{RMS} |
| Continuous current overload cap. | $T_{inlet} = 40^{\circ}C$, for overload capability 150% for 60s | | | 418 | | A_{RMS} |
| Short time current | $T_{inlet} = 40^{\circ}C$, 10s, every 180s, initial load = $510A_{RMS}$ | I_{Unit2} | | | 638 | A_{RMS} |
| DC current | no rotating field, $T_{inlet} = 40^{\circ}C$ | $I_{Unit2 DC}$ | | | 280,0 | A_{av} |
| Overcurrent shutdown | within 15 μ s | | | 2500 | | A_{peak} |
| Switching frequency | | f_{sw2} | | | 7000 | Hz |
| Power losses | $V_{Unit2} = 690V$, $V_{DC} = 1100V$, $T_{inlet} = 40^{\circ}C$, $T_J \leq 125^{\circ}C$, $f_{Unit2} = 50Hz$, $f_{sw2} = 2000Hz$, $\cos(\phi) = 0,85$, $I_{Unit2} = 574A_{RMS}$ | P_{loss2} | | 2160 | | W |
| Power factor | | $\cos(\phi)_{Unit2}$ | -1,00 | | 1,00 | |

| General data | | | min | typ | max | units |
|---------------------------------------|--|----------------|-------------|-----|-----|------------|
| Power losses (PCB) | | $P_{loss aux}$ | | | 40 | W |
| EMC test | according to IEC61800-3 at named interfaces | power | V_{Burst} | 2 | | kV |
| | | control | V_{Burst} | 1 | | kV |
| | | aux (24V) | V_{Surge} | 1 | | kV |
| Insulation management is designed for | | V_{Line} | | 690 | | V_{RMS} |
| Insulation test voltage | according to EN50178, $f = 50Hz$, $t = 60s$ | V_{isol} | | 2,5 | | kV_{RMS} |

| Controller interface data | | | min | typ | max | units |
|-------------------------------|---|----------------|------|---------------------------|------|----------|
| Auxiliary voltage | | V_{aux} | 13 | 24 | 30 | V_{av} |
| Auxiliary power requirement | $V_{aux} = 24V_{av}$ | P_{aux} | | 40 | | W |
| Driver and interface board | see separate technical information | | | DR240 | | |
| Driver core | | | | EiceDRIVER 2ED300C17-S | | |
| Digital input level | resistor to GND 10,0k Ω , capacitor to GND 1nF | V_{in} | 0,0 | | 15,0 | V |
| Digital output level | open collector, low = ok, max 15mA | V_{out} | 0,0 | | 30,0 | V |
| Analog current outputs Unit 2 | load max 1mA; at 574A | $V_{ana out}$ | 3,10 | 3,16 | 3,22 | V |
| Analog temperature output | load max 1mA; at $T_{NTC} = 76^{\circ}C$ correspond to $T_J = 125^{\circ}C$ | $V_{T out}$ | 8,69 | 8,87 | 9,05 | V |
| Overtemperature shutdown | at $T_{NTC} = 81^{\circ}C$ correspond to $T_J = 136^{\circ}C$ | $V_{T out OT}$ | | 10 | | V |

| | |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2016-02-09 |
| approved by: YZ | revision: 2.0 |

Technical Information

PrimeSTACK™

2PS12017E44G35911



Preliminary data

Heat sink air cooled / Thermal data

| | | | min | typ | max | units |
|-------------------------------|---|-----------------------------|-----|-----|-----|-------|
| Airflow | T _{Air} = 20°C, P _{air} = 1013hPa, dry- and dust free, measured on side of heat sink. according to DIN 41882 | $\Delta V / \Delta t_{Air}$ | 500 | | | m³/h |
| Air pressure drop | | Δp_{Air} | | 190 | | Pa |
| Cooling air inlet temperature | heat sink temperature > -25°C | T _{inlet} | -40 | | 40 | °C |

| | |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2016-02-09 |
| approved by: YZ | revision: 2.0 |

Technical Information

PrimeSTACK™

2PS12017E44G35911



Preliminary data

IGBT data unit 2

| | | | min | typ | max | units |
|--|--|--------------|-----|----------|-----|-------|
| Type | assumed | | | | | |
| collector-emitter saturation voltage | $I_c = 300A$; $V_{ge} = 15V$; $T_{vj} = 150^\circ C$ | $V_{CE sat}$ | | 2,45 | | V |
| parameter for linear model | $T_{vj} = 25^\circ C$ | V_{ce1} | | 1,176 | | V |
| parameter for linear model | $T_{vj} = 25^\circ C$ | r_{ce1} | | 2,582 | | mΩ |
| parameter for linear model | $T_{vj} = 150^\circ C$ | V_{ce2} | | 1,082 | | V |
| parameter for linear model | $T_{vj} = 150^\circ C$ | r_{ce2} | | 4,56 | | mΩ |
| turn-on / turn-off energy loss per pulse | $T_{vj} = 25^\circ C$ | E_1 | | 63 / 55 | | mJ |
| turn-on / turn-off energy loss per pulse | $T_{vj} = 150^\circ C$ | E_2 | | 93 / 100 | | mJ |
| thermal resistance, junction to case | per IGBT | R_{thjc} | | 0,083 | | K/W |
| thermal resistance, case to heatsink | per IGBT | R_{thch} | | 0,033 | | K/W |

Diode data unit 2

| | | | min | typ | max | units |
|--------------------------------------|---|------------|-----|-------|-----|-------|
| Type | assumed | | | | | |
| forward voltage | $I_F = 300A$; $V_{ge} = 0V$; $T_{vj} = 150^\circ C$ | V_F | | 1,95 | | V |
| parameter for linear model | $T_{vj} = 25^\circ C$ | V_{F1} | | 1,158 | | V |
| parameter for linear model | $T_{vj} = 25^\circ C$ | r_{F1} | | 2,139 | | mΩ |
| parameter for linear model | $T_{vj} = 150^\circ C$ | V_{F2} | | 1,062 | | V |
| parameter for linear model | $T_{vj} = 150^\circ C$ | r_{F2} | | 2,959 | | mΩ |
| reverse recovery energy | $T_{vj} = 25^\circ C$ | E_{rec1} | | 28 | | mJ |
| reverse recovery energy | $T_{vj} = 150^\circ C$ | E_{rec2} | | 68 | | mJ |
| thermal resistance, junction to case | per Diode | R_{thjc} | | 0,13 | | K/W |
| thermal resistance, case to heatsink | per Diode | R_{thch} | | 0,051 | | K/W |


Environmental conditions

| | | | min | typ | max | units |
|----------------------------|---|---------------|------|------|------|-------|
| Storage temperature | | T_{stor} | -40 | | 85 | °C |
| Ambient temperature | | T_{amb} | -25 | | 55 | °C |
| Operating temperature | see chapter Heat sink air cooled / Thermal data | | | | | |
| Cooling air velocity (PCB) | | $V_{Air PCB}$ | 2,0 | | | m/s |
| Air pressure | standard atmosphere | p_{Air} | 900 | | 1100 | hPa |
| Humidity | no condensation | Rel. F | 5 | | 85 | % |
| Installation height | | | 0 | | 1000 | m |
| Vibration | according to IEC60721 | | | | 5 | m/s² |
| Shock | according to IEC60721 | | | | 40 | m/s² |
| Protection degree | | | | IP00 | | |
| Pollution degree | | | | 2 | | |
| Torque at DC Terminals | | M_{DC} | 6,0 | | 10,0 | Nm |
| Torque at AC Terminals | | M_{AC} | 16,0 | | 20,0 | Nm |
| Dimensions | width × depth × height | | 216 | 360 | 288 | mm |
| Weight with heat sink | approximation | | | 18,0 | | kg |


| | |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2016-02-09 |
| approved by: YZ | revision: 2.0 |

Preliminary data


f_o - derating curve IGBT (motor), Diode (generator)
 $\cos(\phi) = \pm 0,85$
 $T_{cool\ medium} = 40^\circ C$

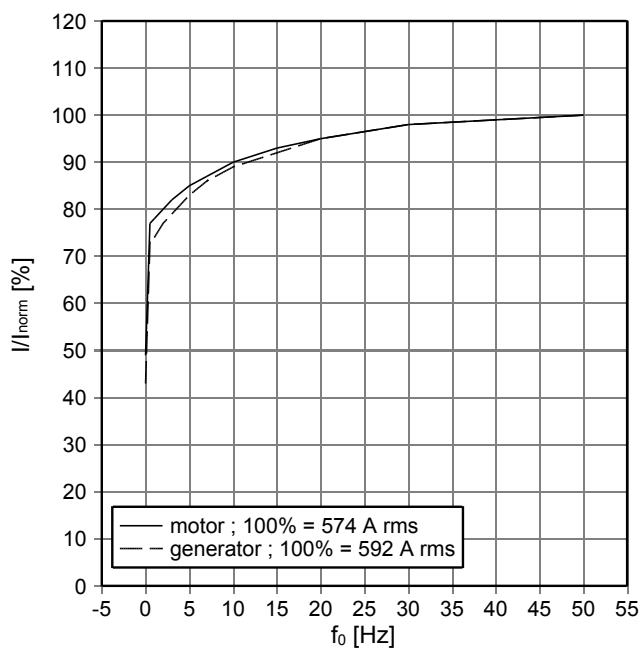

f_{sw} - derating curve IGBT (motor), Diode (generator)
 $\cos(\phi) = \pm 0,85$
 $T_{cool\ medium} = 40^\circ C$

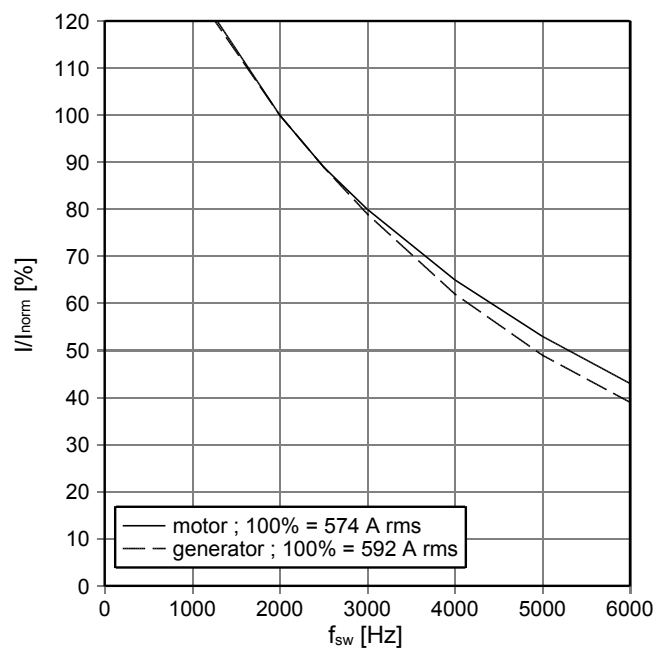


Transient thermal impedance per module
 $T_{cool\ medium} = 40^\circ C$

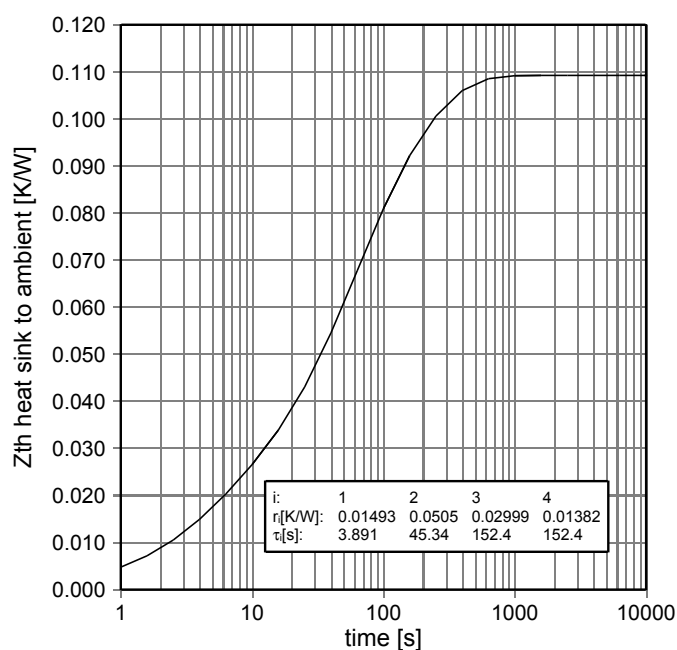


| | |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2016-02-09 |
| approved by: YZ | revision: 2.0 |

Mechanical drawing

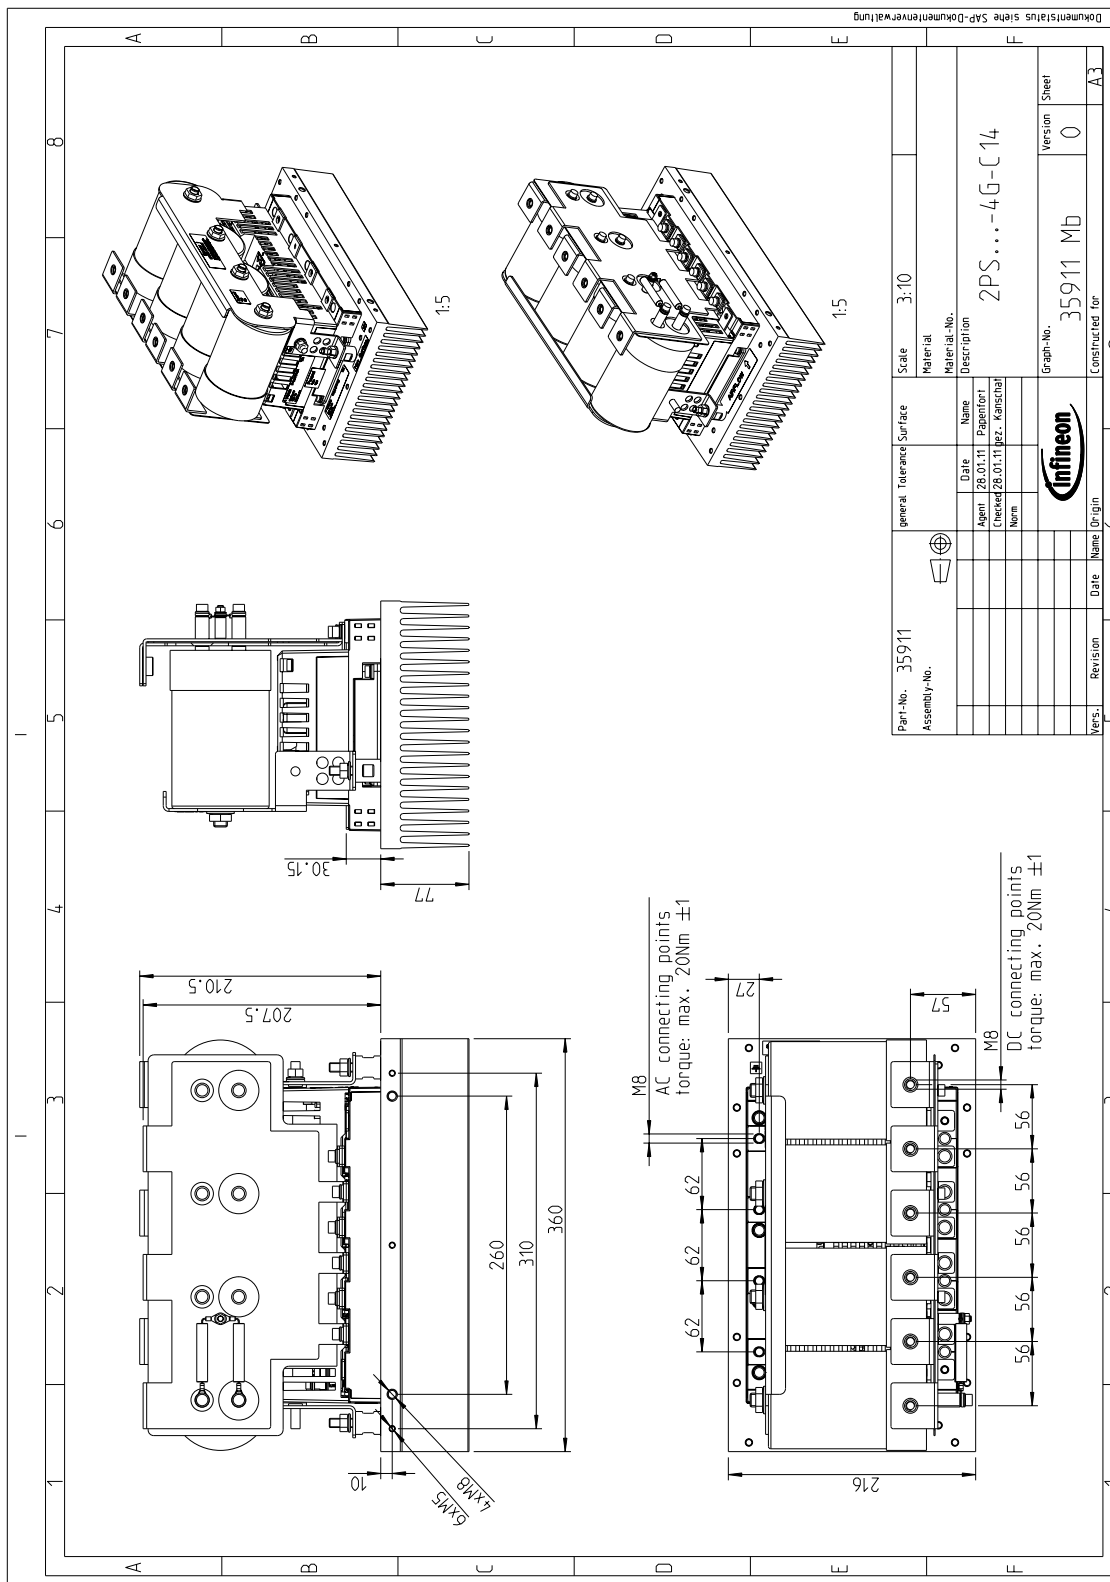

| | |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2016-02-09 |
| approved by: YZ | revision: 2.0 |

Circuit diagram

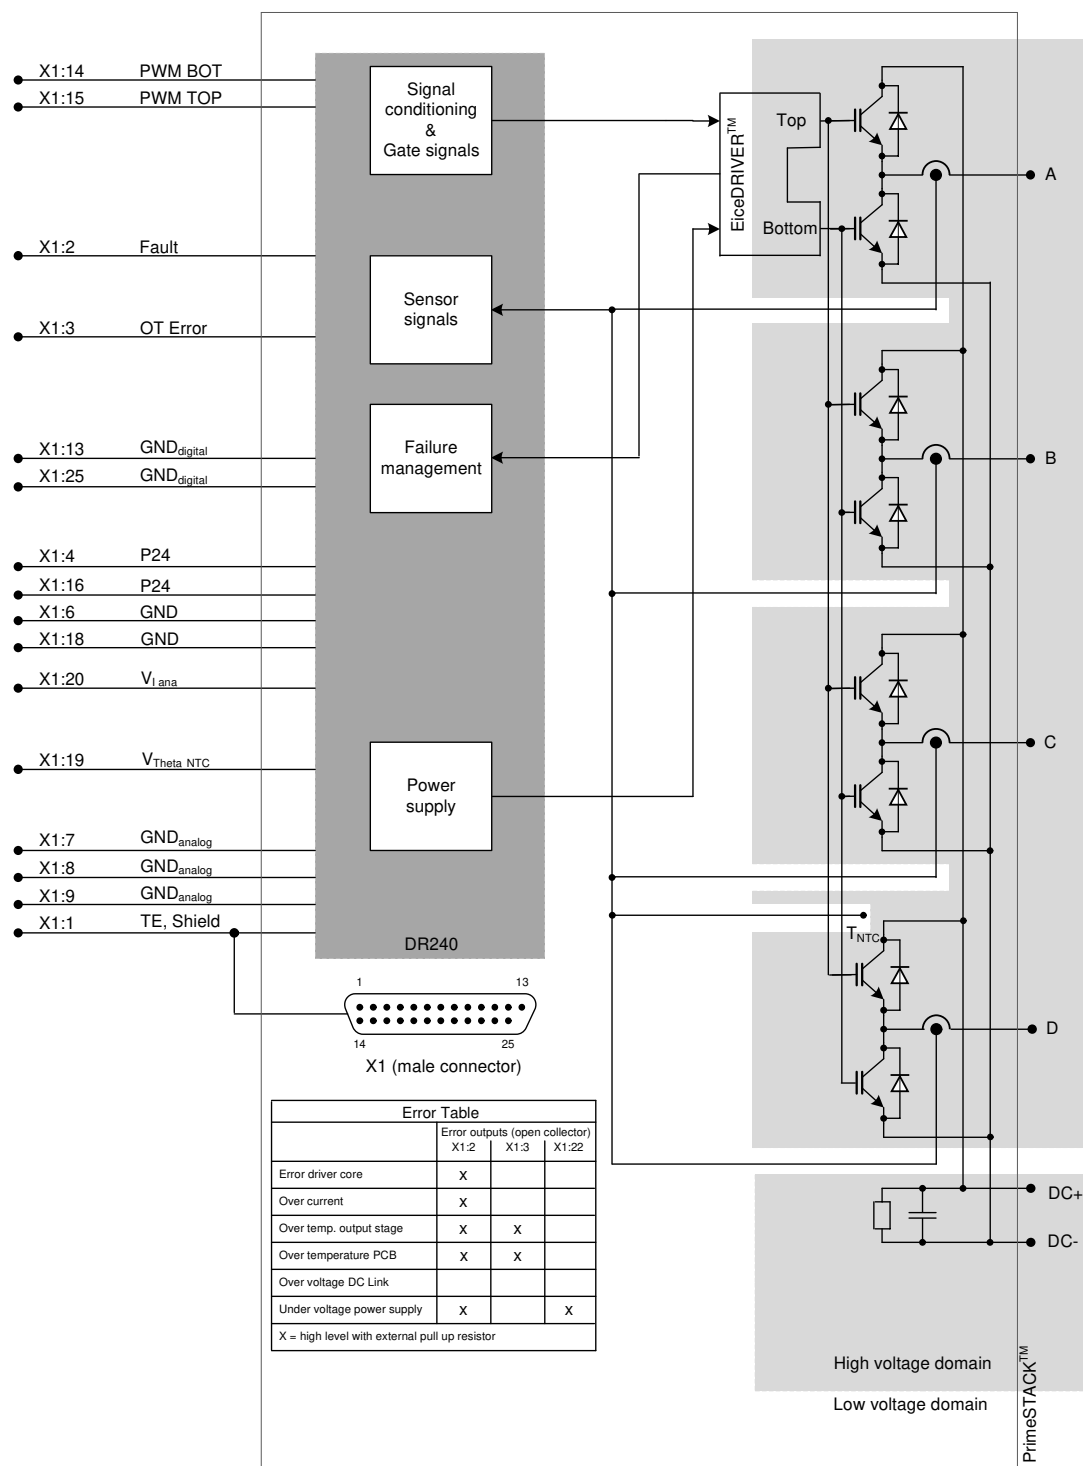

Preliminary data

Terms & Conditions of usage

The data contained in this product data sheet is exclusively intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This product data sheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant to the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics.

Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see www.infineon.com, sales&contact). For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or life endangering or life support applications, please notify. Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery depended on the realization of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this product data sheet are reserved.

Safety Instructions

Prior to installation and operation, all safety notices and warnings and all warning signs attached to the equipment have to be carefully read. Make sure that all warning signs remain in a legible condition and that missing or damaged signs are replaced. To installation and operation, all safety notices and warnings and all warning signs attached to the equipment have to be carefully read. Make sure that all warning signs remain in a legible condition and that missing or damaged signs are replaced.

| | |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2016-02-09 |
| approved by: YZ | revision: 2.0 |