DT16-18SD-K004 - ACTIVE

DEUTSCH | DEUTSCH DT

TE Internal #: DT16-18SD-K004 Housing for Female Terminals, Wire-to-Wire, 18 Position, .184 in [4.67 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings



Connector & Housing Type: Housing for Female Terminals Mating Pin Diameter: 1.59 mm [.063 in] Connector System: Wire-to-Wire Number of Positions: 18

Centerline (Pitch): 4.67 mm [.184 in]

Features

E T E connectivity

Product Type Features

Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Contact Retainer
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Configuration Features Connector Modification	Enhanced Seal Retention, End Cap
	Enhanced Seal Retention, End Cap 18
Connector Modification	
Connector Modification Number of Positions	18
Connector Modification Number of Positions Number of Rows	18

Housing for Female Terminals, Wire-to-Wire, 18 Position, .184 in [4.67 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Body Features

Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	D
Contact Features	
Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	With
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

Housing	Material
---------	----------

PA GF

Centerline (Pitch)

4.67 mm[.184 in]

Dimensions

Connector Height	43.82 mm[1.725 in]
Product Width	20.98 mm[.826 in]
Product Length	35.38 mm[1.393 in]
Row-to-Row Spacing	4.83 mm[.19 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	Not Tested
UL Flammability Rating	Not tested

Housing for Female Terminals, Wire-to-Wire, 18 Position, .184 in [4.67 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Packaging Features

Packaging Quantity	500
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5%

Decamethylcyclopentasiloxane (D5) (.5% in
Component Part)
Article Safe Usage Statements:
Wash thoroughly after handling. Recycle if possible and dispose of the article by
following all applicable governmental regulations relevant to your geographic
location.Halogen ContentNot Low Halogen - contains Br or Cl > 900
ppm.

Solder Process Capability

Not reviewed for solder process capability

in Component Part)

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Housing for Female Terminals, Wire-to-Wire, 18 Position, .184 in [4.67 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Compatible Parts




TE Part # CAT-D48-ST273 **DEUTSCH Solid Contacts**




TE Part # CAT-J67-DSCC16 DEUTSCH Size 16 Crimp Contacts

Also in the Series DEUTSCH DT

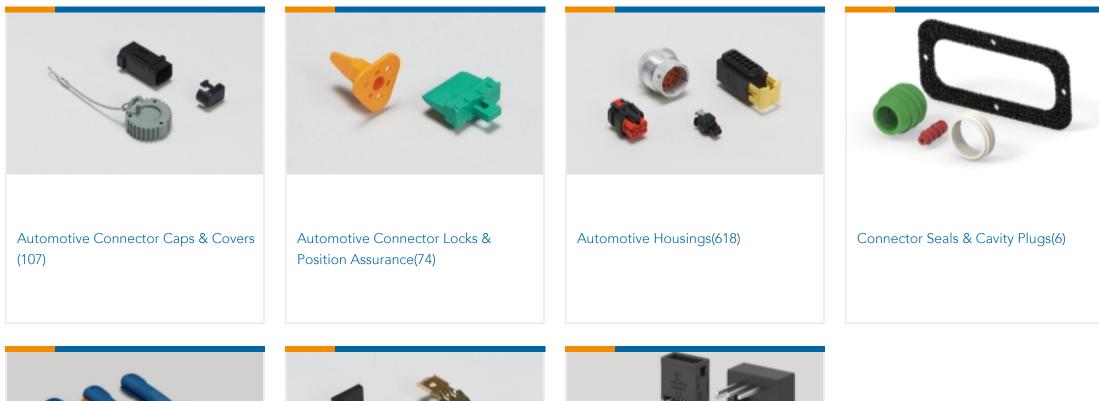





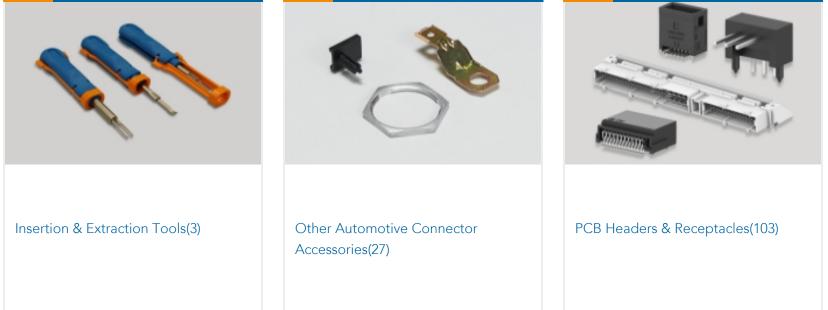

Customers Also Bought



Housing for Female Terminals, Wire-to-Wire, 18 Position, .184 in [4.67 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT







Documents

Product Drawings

PLG, 18P, BLK, E, D

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_DT16-18SD-K004_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT16-18SD-K004_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT16-18SD-K004_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product SpecificationsProduct SpecificationEnglishProduct Specification

English