

	Ŧ	D D	п	m In the second se	0



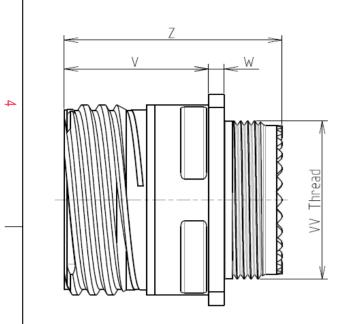

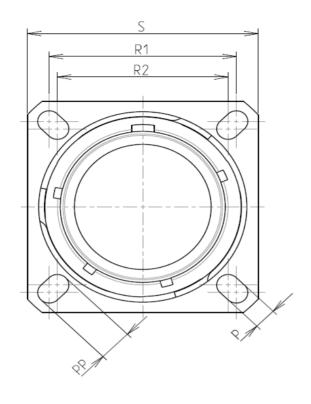

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	65℃ to +175℃				
-Salt Spray	: 500 hours				

: 9.15 g ± 10%

8D 0

G

09

Ζ

98

А


F

Е

Dim	Nominal		
Р	3.25±0.2		
PP	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M12x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

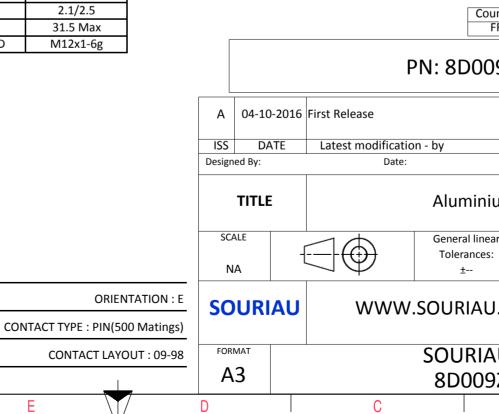

	ω		A				
		I I					
	1000						
		0			4		
	6						
	1						
7							
	-						
		1					
C EV.					3		
NS EXA	AMPLE						
any non-conformity or damage							
which does not comply with of the Parties or by a third party							
idation, technical notice.)							
untry	Jurisd	liction & Cont	rol List		2		
FR	Not Listed						
9Z98AE							
				1405 112			
		CUSTOME	R DRAWING	MOD N°			
um	m Pacantacla 9D cariac						
uIII	n Receptacle 8D series						
ar :			PROJECT				
	859 This document is the property of						
J.CC	.COM SOURIAU it must not be reproduced or						
communicated without permission							
UDRG N° SHEET							
)Z9	8AE-C			1/2	J		
	В		А				

r	工	۵	нт —	m	D	0
		Contact Layout				Panel Cutou
4	-X	Φ _B Λ			*	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numb size no. conta 9 -98 3	n <u>X-axis (mm) (mm)</u> +.065 (1.65) +.038 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) er of Size Service Contact Supersed tots contacts rating location			¥	ØT.
ω						Dim ØA ØAA R1 ØT
	L					
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D0092
					A 04-10-2	016 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Aluminium
_					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D009Z9
	Н	G	F	E	D	C

