

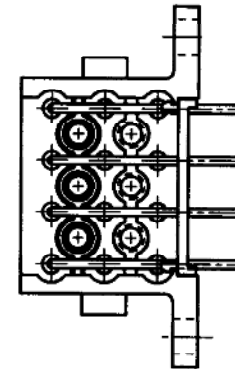
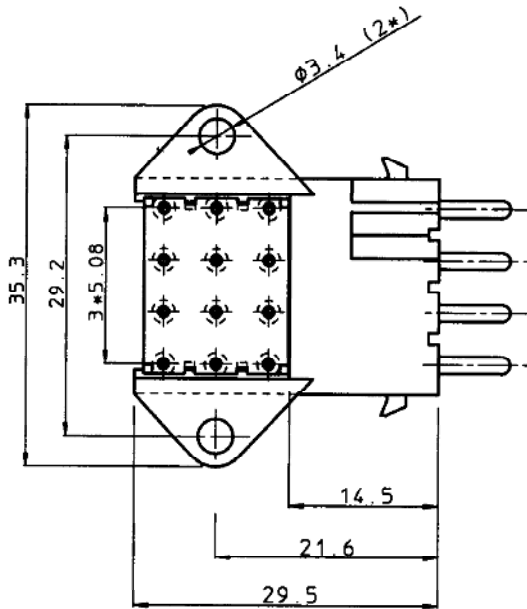
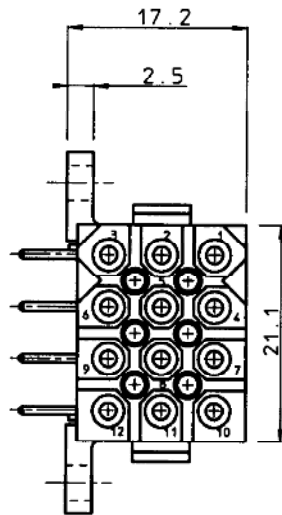


GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

REV.	DATE	DESCRIPTION	BY	C'K'D'
01	21-09-89	ALIGNMENT PLATE LAYOUT CHANGED	E.C.	
02	17-1-92	DISCRIMINATION HOLES ADDED	M.B.	
03	13-02-96	CONVERSION ME10	K.N.	

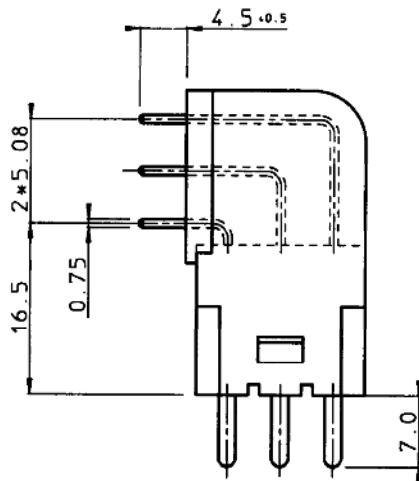

RECOMMENDED P.C. BOARD HOLE LAYOUT

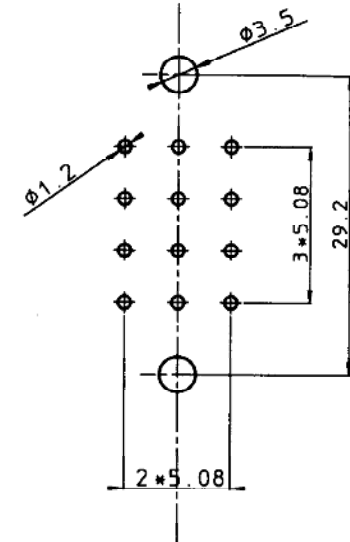

**MATERIAL :**

BODY : POLYESTER 30% GLASSFILLED , UL94V-0, COLOUR : BLACK  
 CONTACTS : BRASS, GOLD OR TIN PLATED

**PERFORMANCE CHARACTERISTICS :**

OPERATING TEMPERATURE : -55°C TO 125°C  
 INSULATING RESISTANCE : 5000 MΩ MIN.  
 TEST POTENTIAL : 2000 VAC  
 CURRENT RATING : 5 AMP

**NOTES :**

- CONNECTOR SUPPLIED FULLY LOADED WITH MACHINED PIN CONTACTS.  
 GOLD PLATED : SMS12GE6 ; GOLD FLASH : SMS12GE6J ; TIN PLATED : SMS12GE6T
- MATING PART SMS12P1 PLUG
- PC-BOARD THICKNESS : 3.2 MM

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

DIT IS ONZE EIGENSCHAP. IT IS NIET TO BE COPIED, REPRINTED, OVERDRAAGT AAN DERDEN, NOCH VOOR FABRICATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. DIT NIET TERUGKEEREN IN CASUS VAN NIET-GEBRUIK.

1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN	APPR.	DATE	SIGN.	DIKIMATE R. ANGLED RECEPTACLE 12MALE MACH. CONTACTS
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE	DRAFT	29.03.89	E. CREELLE	CAT. No. SMS12GE6*
ALL DIMENSIONS IN MM	CHECKED			SOURIAU Route Nationale 23 72470 CHAMPAGNE
ALLE AFMETINGEN IN MM	PROD. MGR.			SCALE 2/1
	PR. ENG. MGR.			BS,C .200961,009,03 DRAWING No. CUSTOMER DRAWING
	PR. MGT. MGR.			
	REFERENCES / REFERENTIES			