




used for: D-SUB



Wire size AWG	Crimp height A
24	0,68 - 0,86
22	0,68 - 0,86
20	0,68 - 0,86

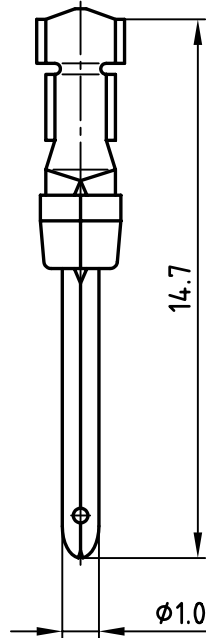

STRIPPING DIMENSIONS



Finish	Part-NO.
8µ" hard-gold-plated in the contact area	163A20679X
30µ" hard-gold-plated in the contact area	163C20679X

NOTES:

- Material: phosphor bronze
- Finish: see table
- Temperature range: -55°C to +125°C
- Rated current: 7.5A
- Contact resistance: <= 10mOhm
- Crimping: use crimp tool 360X10079X

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

tolerance		dim. in mm	
2005	date	name	
drawn	07.04.	Lehmenkühler	
appd.	07.04.	Mickenbecker	
norm			
d-old			
rev.	description	date	name



scale:	5:1
material:	SEE NOTES
title:	PLUG CONTACT CRIMP AWG24-20 (separate contacts)
dwg no:	AutoCAD 2004
part no:	SEE TABLE
	DIN-A 4 sh: 1/1

4

3

2

1