

Ŧ	۵	п	m	0



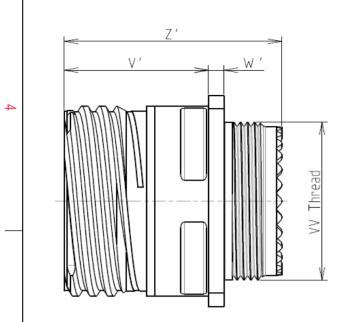

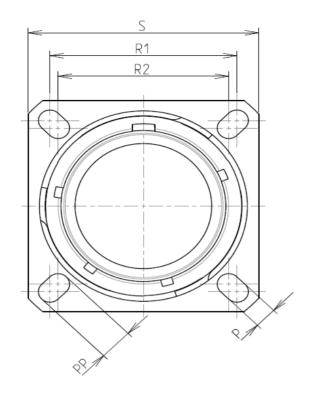

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

7	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer : Gold over copper Alloy 0.8µm minimum			
	-Contact Plating				
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 2000 hours			

: 14.3 g ± 10%

8D 0

G

13

Μ

04

S

F

Ν

L

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M18x1-6g			

Delivered W/O Contacts


CONTACT LAYOUT : 13-04

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : N

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

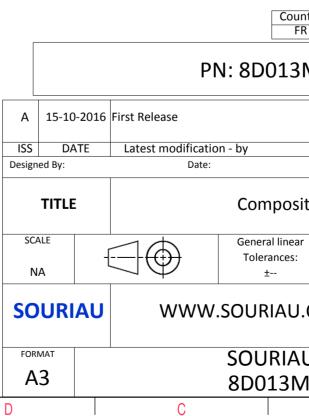

	Φ		A			
h		0			4	
S EXA	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
Intry R	Jurisdiction & Control List Not Listed					
3M04SNL						
		CUSTOME	R DRAWING	MOD N°		
ite Receptacle 8D series						
ar	NPRDS / PROJECT					
859 This document is the property of						
.cc	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
V04	4SNL-C	I	_	1/2	J	
	В		А			

r	т	۵	٦	m		0	
		Contact Layout				Ρ	Panel Cutout
4		$X \begin{pmatrix} & & & \\ & & $			1	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Cont positio A B C D Shell Arrangement N size no. 13 -4	n ID (mm) (mm) +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)			₹		ØT_
ω						Dim ØA ØAA R1 ØT	
	L						
						SOURIAU shall not be lia due to a use of the Pi the Specifications issued b (professional reco	roducts whi by either of ommendati
N						PN: 8D	FR
					A 15-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:	
					TITLE		mposite
<u> </u>					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOU	RIAU.C
					FORMAT A3		JRIAU 013M0
L	Н	G	F	E	D	С	

