


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:



LTI P/N: CB1.13-IPXLK-SALRMGT-4IN (4 INCHES)
 CB1.13-IPXLK-SALRMGT-10IN (10 INCHES)

| REVISIONS | | | | |
|-----------|-----|--------------------|-----------|------------|
| REV | ECR | DESCRIPTION | DRAWN | DATE |
| 1 | | PRODUCTION RELEASE | M. LARSEN | 06/06/2022 |

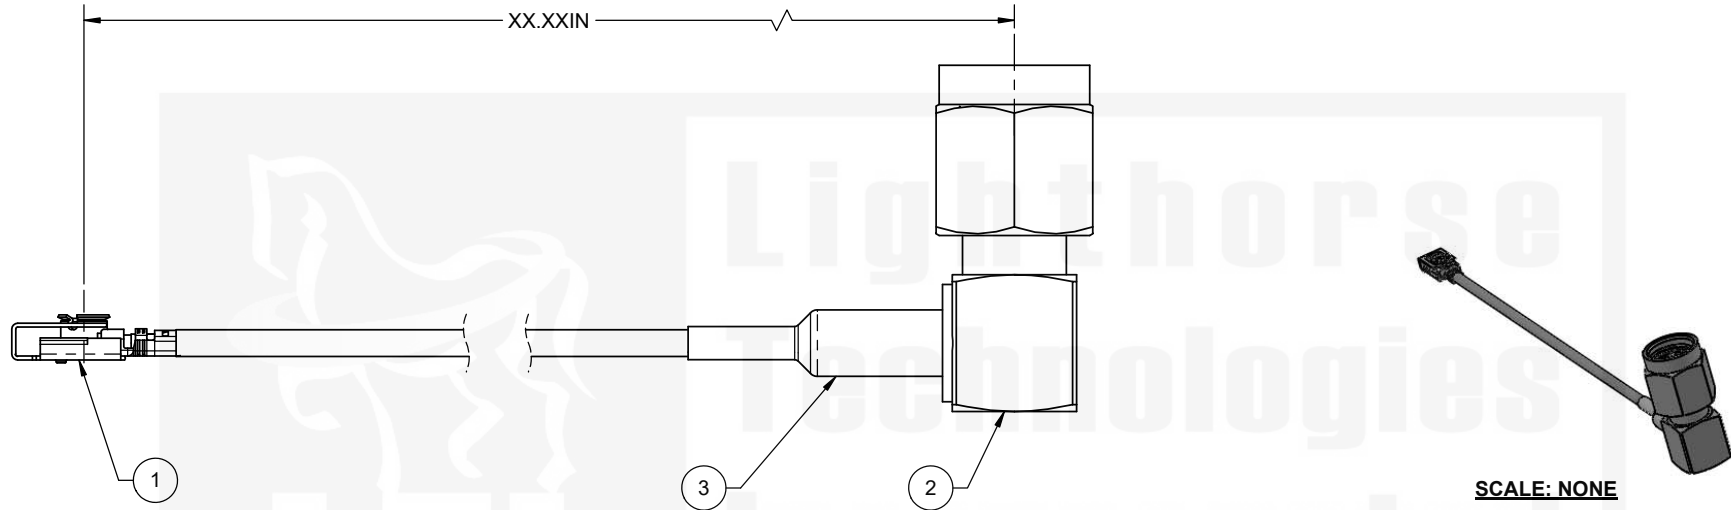

| ITEM | PART NUMBER | DESCRIPTION | QTY |
|------|---------------------|--|-----|
| 1 | CB1.13-2IPXLK-500MM | IPXLK (MHF1 LK) LOCKING, RHT ANGLE, JACK, USING 1.13 COAX, BLACK, (I-PEX 20278-112R-113) | 0.5 |
| 2 | SALRM11GT-316 | SMA, RIGHT ANGLE, REV POL PLUG, CABLE CRIMP | 1 |
| 3 | 1635F-1/8" | .125 (1/8) DIA, .75 LENGTH, GREEN | 1 |

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

| | | |
|---|----------------------|--|
| DO NOT SCALE DRAWING | |  Lighthouse Technologies San Diego, CA WWW.IPCONNECTOR.COM |
| TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 XX = ±0.25 XXX = ±0.13 ANGLE = ±30° | | |
|  THIRD ANGLE PROJECTION | | TITLE: CABLE ASSEMBLY, IPXLK (MHF1 LK), LOCKING, R/A JACK, TO SMA, R/A RP PLUG, CRIMP USING 1.13 MICRO COAX |
| CUSTOMER APPROVAL SIGN / DATE: | | SIZE PART/DWG. NO: REV B CB1.13-IPXLK-SALRMGT-xxIN A |
| ENG APPR. P. BURDGE 06/06/2022 CHECKED M. HELD 06/06/2022 DRAWN M. LARSEN 06/06/2022 NAME DATE | SCALE: 4:1 FILE NAME | SHEET 1 OF 1 |

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED, THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

