

# Mini-Com® TX6A™ Shielded Coupler Module

# PANDUIT®

SPECIFICATION SHEET

## specifications

Category 6A/Class E<sub>A</sub>, 8-position, female to female, shielded coupler module shall provide easy plug and play pass through connectivity. Coupler modules shall act as one connecting hardware component in the channel. Coupler modules shall be available individually. Couplers shall be compatible with 6 or 8-position RJ45 shielded patch cords with T568A and T568B wiring schemes.



## technical information

<b>Category 6A/Class E<sub>A</sub> channel performance:</b>	Exceeds channel requirements of ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E <sub>A</sub> standards at swept frequencies 1 to 500 MHz
	One coupler can be used per channel while maintaining Category 6A/Class EA performance
<b>FCC compliance:</b>	Complies with ANSI/TIA-1096-A (formerly FCC Part 68); contacts plated with 50 microinches of gold
<b>IEC compliance:</b>	Meets IEC 60603-7
<b>PoE and PoH compliance:</b>	Rated for 2500 cycles with IEEE 802.3af / 802.3at and 802.3bt type 3 and type 4. Supports Power over HDBaseT up to 100 watts.
<b>RoHs compliance:</b>	Compliant
<b>c(UL)us Listed:</b>	UL 1863 (Use as communications circuit accessory), CSA standard C22.2
<b>Operating Temperature:</b>	-10°C to 75°C (14°F to 167°F)

## key features and benefits

<b>100% performance tested</b>	Confidence that each coupler will deliver the critical electrical performance requirements
<b>Modular</b>	Couplers snap in and out of all Mini-Com® Faceplates, All Metal Modular Patch Panels and industrial bulkheads for easy moves, adds and changes
<b>RJ45 interface</b>	Industry standard interface provides a quick and easy plug and play connection to RJ45 patch cords; backwards compatible
<b>Identification</b>	Can be clearly identified with optional icons for port identification
<b>Blockout device (optional)</b>	Provides a simple and secure method to control access to data ports while not in use

## applications

The Mini-Com® TX6A™ Shielded Coupler Module is a component of the TX6A™ Shielded Copper Cabling System. Couplers are designed to perform as one connector in the channel, allowing up to one coupler in each channel to be used while maintaining channel performance. With certified performance to the ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E<sub>A</sub> standards, this system will support the following Ethernet speeds:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet) and 10GBASE-T (10 Gigabit Ethernet)

Couplers are a reliable, modular solution, ideal when setting up temporary networks for testing, during a planned system upgrade, or for quick cabinet connection in "rack and roll" applications.

### TX6A™ Shielded Copper Cabling System

#### Mini-Com® TX6A™ Shielded Coupler Module

**Coupler Module:** CCS6X88BL

#### Accessories

<b>Clear dust cap:</b>	MDC-C
<b>Blockout device:</b>	PSL-DCJB-^^^
<b>Phone icons:</b>	CIPIW-C+
<b>Data icons:</b>	CIDIW-C+

^^^To designate color other than Red, add suffix BL (Black), BU (Blue), YL (Yellow), GR (Green), OR (Orange), IW (Off White) or IG (International Gray) at the end of the part number. 10/package.

+To designate color other than IW (Off White), replace IW with EI (Electric Ivory), IG (International Gray), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange) or VL (Violet) in the part number. 100/package.

Note: Mini-Com® Coupler Modules are not compatible with Panduit® Surface Mount Boxes.


# Mini-Com® TX6A™ Shielded Coupler Module

Mechanical Test	Test Method	Measurement	Typical Test Results
<b>Normal Force</b>	–	Load (grams)	>100
<b>Vibration</b>	IEC 512-6d	Circuit Resistance (mOhms)	<40
<b>Shock</b>	IEC 512-6c	Contact Disturbance (microseconds)	<5
<b>Durability</b>	IEC 512-9a	Circuit Resistance (mOhms)	<40
<b>Mating/Un-Mating</b>	IEC 512-13b	Mating Force (N)	<20
		Un-Mating Force (N)	<20
<b>Mating Cycles</b>	IEC 60603-7	Number of Plug Insertions	>2500


Electrical Test	Test Method	Measurement	Typical Test Results
<b>Low Level Circuit Resistance</b>	IEC 512-2a	Resistance (mOhms)	>20
<b>Dielectric Withstand Voltage</b>	IEC 512-4a	1000 V, 1 minute	Passed
<b>Insulation Resistance</b>	IEC 512-3a	Resistance (mOhms)	<500

Environmental Test	Test Method	Measurement	Typical Test Results
<b>Temperature Life</b>	IEC 512-9b	Circuit Resistance (mOhms)	<40
<b>Humidity</b>	IEC 512-11c	Circuit Resistance (mOhms)	<40
<b>Thermal Shock</b>	IEC 512-11d	Circuit Resistance (mOhms)	<40
<b>Climatic Sequence</b>	IEC 512-11a	Circuit Resistance (mOhms)	<40
<b>Flowing Mixed Gas Corrosion</b>	IEC 512-11g	Circuit Resistance (mOhms)	<40

## Mini-Com® Category 6A Shielded Coupler Module



Compatible with Mini-Com® Faceplates and Modular Patch Panels

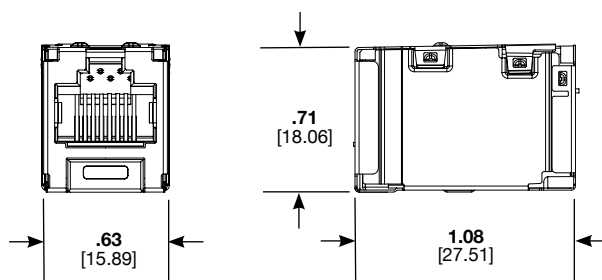

Dimensions are in inches. [Dimensions in brackets are metric].

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

**PANDUIT®**

For more information  
Visit us at [www.panduit.com](http://www.panduit.com)  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

© 2021 Panduit Corp.  
ALL RIGHTS RESERVED.  
Printed in the U.S.A.  
COSP490--WW-ENG  
9/2021