


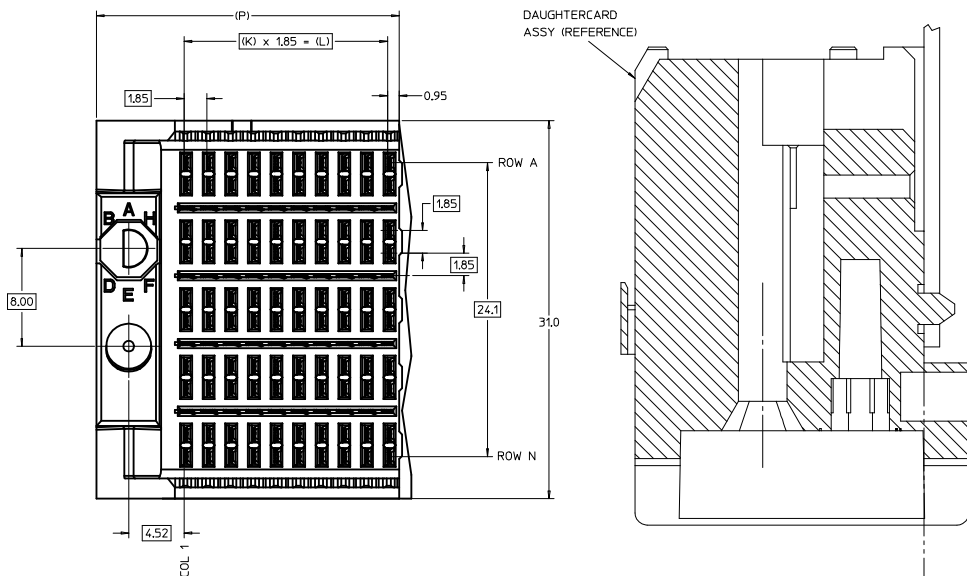


- NOTES:
1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED. UL 94V-0. COLOR - GRAY. SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
 2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA, SELECTIVE MATTE TIN (Sn) ON PCB TAILS, NICKEL (Ni) OVERALL.
 3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
 4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
 5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
 6. PACKAGE PER PK-70873-565.
 7. MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN.
 8. OPTIONAL HOLE LOCATION FOR GROUNDED GUIDE PIN OR ADDITIONAL GUIDE PIN SUPPORT. FOR GROUNDED GUIDE PIN, HOLE TO BE PLATED, DRILL SIZE #258, PAD SIZE #550.
 9. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.
 10. MAPS (MOLEX ADVANCED PLATING SYSTEM).





PART NUMBER TABLE				
ASSY PART NO.	K	L	P	TOTAL NO. OF DIFFERENTIAL PAIRS
75237-210*	9	16.65	24.78	50
75237-220*	24	44.40	52.53	125

MODULE ORIENTATION		75237-2***	PIN LENGTH DIM "M"	GOLD (Au) THICKNESS micrometers
1 = LEFT	COLUMN			
1 = 10 COL	KEYING ORIENTATION (SEE TABLE)		0-3.55 mm	0.25 (MAPS)
2 = 25 COL			1-4.55 mm	
			2-5.55 mm	0.76
			3-3.55 mm	
			4-4.55 mm	1.27
			5-5.55 mm	
			7-3.55 mm	
			8-4.55 mm	
			9-5.55 mm	

ROWS AG & NG RECOMMENDED FOR ALL APPLICATIONS. THESE ROWS SHOULD BE CONNECTED TO GROUND

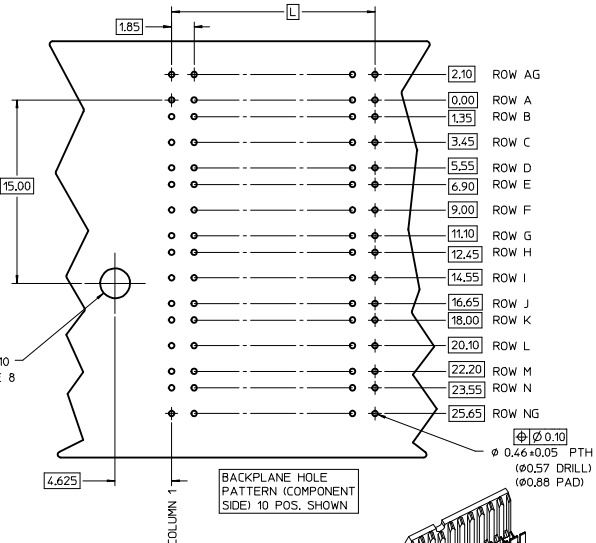


THE PRIMARY CARTON WITH A LABEL STATING 'ELV AND RoHS COMPLAINT' IS LEAD FREE. CARTONS WITHOUT THIS LABEL MAY CONTAIN LEAD.

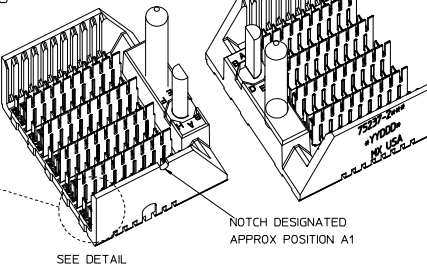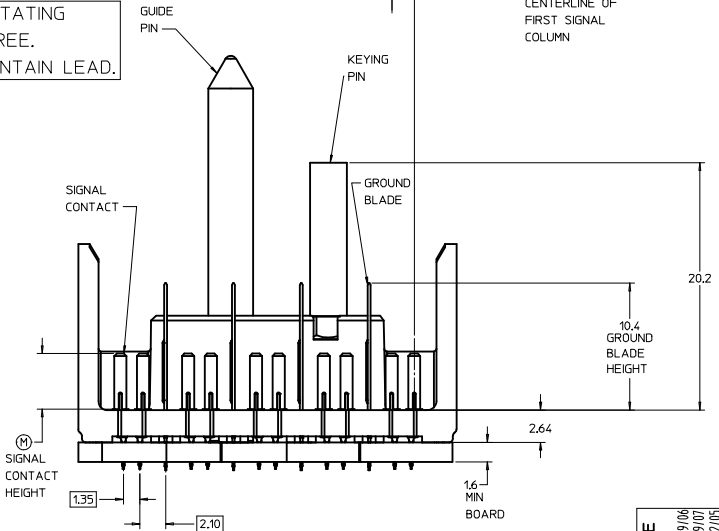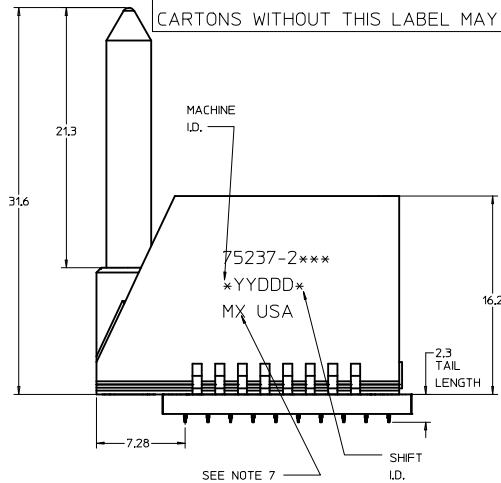

P/N	-**0*	-**1*	-**2*	-**3*	-**4*	-**5*	-**6*	-**7*	-**8*
75237-()	0	A	B	C	D	E	F	G	H
KEYING PIN ORIENTATION									

LEAD-FREE PLATING

REV TO LEAD-FREE EC NO: UCP2013-0690 DRAWINGS 2012/09/06 CHYKMOLE 2012/09/07 APPROVAL 2012/12/05 DESCRIPTION	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION			
	▽=0		mm		MM ONLY		5:1		METRIC		GBX 5-PAIR LF LEFT END BACKPLANE SALES ASSEMBLY			
	▽=0		4 PLACES ±---		DRAWN BY		DATE		TITLE		molex			
	▽=0		3 PLACES ±---		CHECKED BY		DATE		2004/03/11		SD-75237-210			
			2 PLACES ±0.25		SREED		DATE		2004/03/11		SHEET NO. 1 OF 1			
			1 PLACE ±0.38		APPROVED BY		DATE		2004/03/11		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			0 PLACE ±		CBIXLER		DATE		2004/03/11					
			ANGULAR ±1/2°		MATERIAL NO.		SEE CHART		DOCUMENT NO.					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		D							

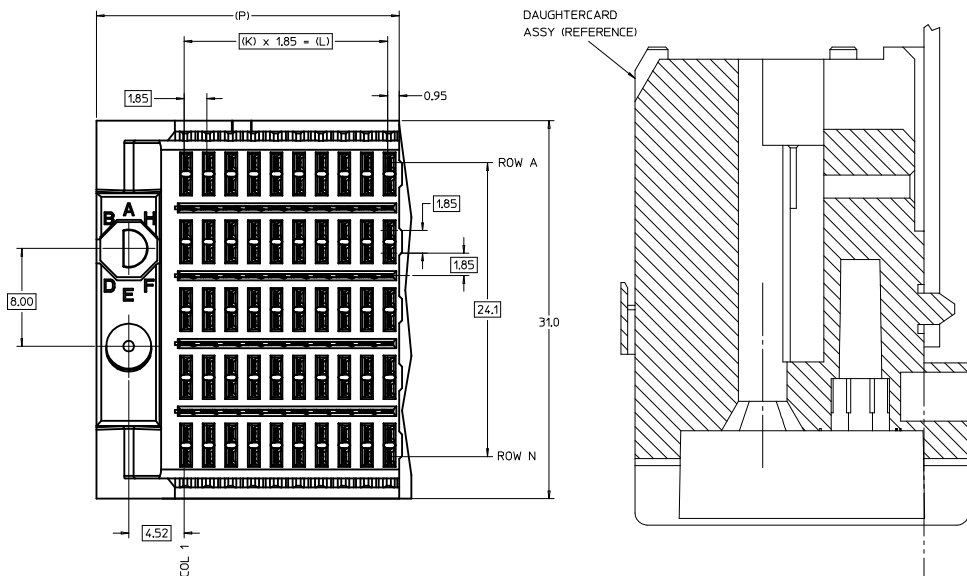


- NOTES:
1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED. UL 94V-0. COLOR - GRAY. SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
 2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA, SELECTIVE MATTE TIN (Sn) ON PCB TAILS, NICKEL (Ni) OVERALL.
 3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
 4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
 5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
 6. PACKAGE PER PK-70873-565.
 7. MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN.
 8. OPTIONAL HOLE LOCATION FOR GROUNDED GUIDE PIN OR ADDITIONAL GUIDE PIN SUPPORT. FOR GROUNDED GUIDE PIN, HOLE TO BE PLATED, DRILL SIZE #258, PAD SIZE #550.
 9. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.
 10. MAPS (MOLEX ADVANCED PLATING SYSTEM).




PART NUMBER TABLE				
ASSY PART NO.	K	L	P	TOTAL NO. OF DIFFERENTIAL PAIRS
75237-210*	9	16.65	24.78	50
75237-220*	24	44.40	52.53	125

MODULE ORIENTATION		75237-2***	PIN LENGTH DIM "M"	GOLD (Au) THICKNESS micrometers
1 = LEFT	COLUMN			
1 = 10 COL	KEYING ORIENTATION (SEE TABLE)		0-3.55 mm	0.25 (MAPS)
2 = 25 COL			1-4.55 mm	
			2-5.55 mm	0.76
			3-3.55 mm	
			4-4.55 mm	1.27
			5-5.55 mm	
			7-3.55 mm	
			8-4.55 mm	
			9-5.55 mm	

ROWS AG & NG RECOMMENDED FOR ALL APPLICATIONS. THESE ROWS SHOULD BE CONNECTED TO GROUND

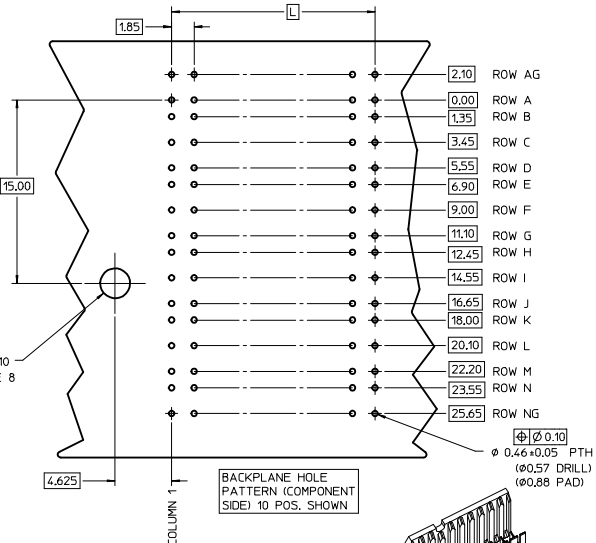

THE PRIMARY CARTON WITH A LABEL STATING 'ELV AND RoHS COMPLAINT' IS LEAD FREE. CARTONS WITHOUT THIS LABEL MAY CONTAIN LEAD.

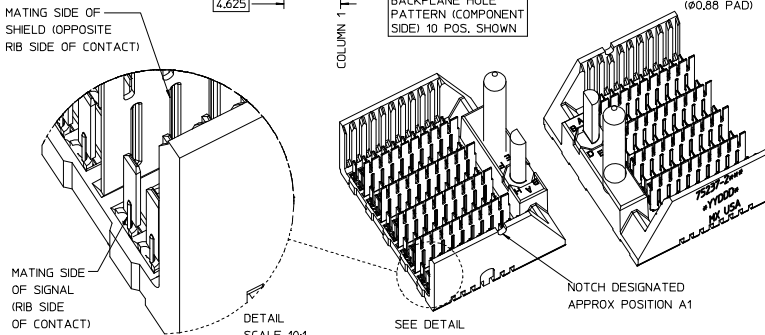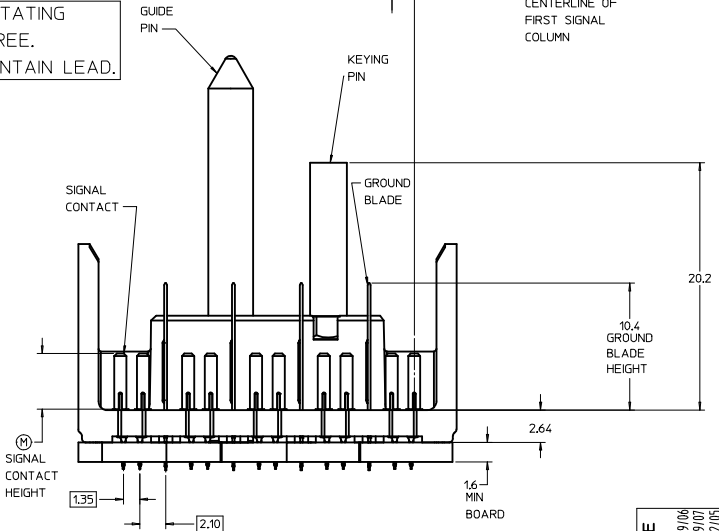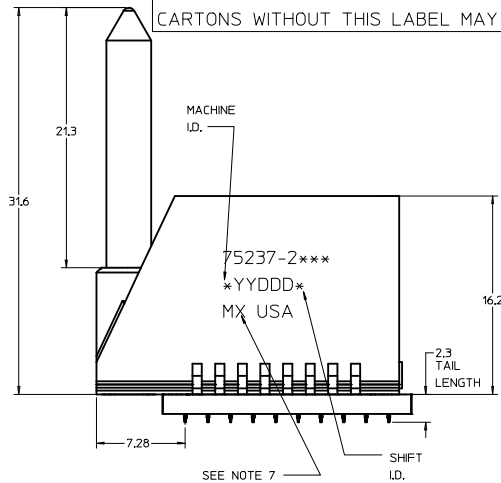

P/N	-**0*	-**1*	-**2*	-**3*	-**4*	-**5*	-**6*	-**7*	-**8*
75237-()	0	A	B	C	D	E	F	G	H
KEYING PIN ORIENTATION									

LEAD-FREE PLATING

REV TO LEAD-FREE IEC NO: LCP2013-0690 DRAWINGS 2012/09/06 CHYKMOLE 2012/09/07 APPROVAL 2012/12/05 DESCRIPTION	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION
	▽=0		mm INCH		MM ONLY		5:1		METRIC		
REV	4 PLACES ±---		3 PLACES ±---		2 PLACES ±0.25		1 PLACE ±0.38		0 PLACE ±		DRAWN BY NMARTIN 2004/03/11 CHECKED BY SREED 2004/03/11 APPROVED BY CBIXLER 2004/03/11
	ANGULAR ±1/2°		DRAFT WHERE APPLICABLE		MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		
SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SEE CHART		SD-75237-210		SHEET NO. 1 OF 1			