

Features:


- Fuses quickly under continuous overload of 15X rated power or greater
- High performance for low cost
- High power to size ratio
- High temperature silicone coating
- 100% RoHS compliant and lead free without exemption
- Halogen free
- Bulk packaging available – contact Stackpole for package quantities



| Electrical Specifications | | | | | |
|---------------------------|-------------------------|-------------------------|-------------------------|--------------|-------------------------------|
| Type / Code | Dielectric Strength (V) | Power Rating @ 25°C (W) | Power Rating @ 70°C (W) | TCR (ppm/°C) | Ohmic Range (Ω) and Tolerance |
| | | | | | 5% |
| WWF12 | 500 | 0.6 | 0.5 | ± 20 ppm/°C | 10 - 2 K |
| WWF1 | 500 | 1.2 | 1.1 | | 10 - 3 K |
| WWF1A | 500 | 1.5 | 1.3 | | 10 - 7 K |
| WWF2 | 1000 | 2.5 | 2.1 | | 10 - 10 K |
| WWF2A | 1000 | 3 | 2.6 | | 10 - 15 K |
| WWF3 | 1000 | 3.7 | 3.2 | | 10 - 22 K |
| WWF3A | 1000 | 4 | 3.4 | | 10 - 30 K |
| WWF4 | 1000 | 5 | 4.3 | | 10 - 40 K |
| WWF5 | 1000 | 6 | 5.1 | | 10 - 50 K |
| WWF7 | 1000 | 8.5 | 7.2 | | 10 - 70 K |
| WWF7B | 1000 | 9 | 7.7 | | 10 - 100 K |
| WWF10 | 1000 | 13 | 11 | | 10 - 150 K |

Max Voltage Rating = $\sqrt{P \cdot R}$

Mechanical Specifications



| Type / Code | A | B | C | D | Unit |
|-------------|---------------|---------------|------------------------------|------------|--------|
| WWF12 | 0.312 ± 0.062 | 0.110 ± 0.031 | 0.025 ± 0.002 | 1.500 typ. | inches |
| | 7.92 ± 1.57 | 2.79 ± 0.79 | 0.62 ± 0.05 | 38.10 typ. | mm |
| WWF1 | 0.375 ± 0.062 | 0.110 ± 0.031 | 0.025 ± 0.002 | 1.500 typ. | inches |
| | 9.53 ± 1.57 | 2.79 ± 0.79 | 0.64 ± 0.05 | 38.10 typ. | mm |
| WWF1A | 0.420 ± 0.062 | 0.110 ± 0.031 | 0.025 ± 0.002 | 1.500 typ. | inches |
| | 10.67 ± 1.57 | 2.79 ± 0.79 | 0.64 ± 0.05 | 38.10 typ. | mm |
| WWF2 | 0.370 ± 0.062 | 0.156 ± 0.031 | 0.032 ± 0.002 | 1.500 typ. | inches |
| | 9.40 ± 1.57 | 3.96 ± 0.79 | 0.81 ± 0.05 | 38.10 typ. | mm |
| WWF2A | 0.550 ± 0.062 | 0.156 ± 0.031 | 0.032 ± 0.002 | 1.500 typ. | inches |
| | 13.97 ± 1.57 | 3.96 ± 0.79 | 0.81 ± 0.05 | 38.10 typ. | mm |
| WWF3 | 0.560 ± 0.062 | 0.187 ± 0.031 | 0.032 ± 0.002 | 1.500 typ. | inches |
| | 14.22 ± 1.57 | 4.75 ± 0.79 | 0.81 ± 0.05 | 38.10 typ. | mm |
| WWF3A | 0.500 ± 0.062 | 0.218 ± 0.031 | 0.032 ± 0.002 | 1.500 typ. | inches |
| | 12.70 ± 1.57 | 5.54 ± 0.79 | 0.81 ± 0.05 | 38.10 typ. | mm |
| WWF4 | 0.700 ± 0.062 | 0.270 ± 0.031 | 0.036 ± 0.002 | 1.500 typ. | inches |
| | 17.78 ± 1.57 | 6.86 ± 0.79 | 0.91 ± 0.05 | 38.10 typ. | mm |
| WWF5 | 0.875 ± 0.062 | 0.312 ± 0.031 | 0.036 ± 0.002 | 1.500 typ. | inches |
| | 22.23 ± 1.57 | 7.92 ± 0.79 | 0.91 ± 0.05 | 38.10 typ. | mm |
| WWF7 | 1.000 ± 0.062 | 0.312 ± 0.031 | 0.036 ± 0.002 | 1.500 typ. | inches |
| | 25.40 ± 1.57 | 7.92 ± 0.79 | 0.91 ± 0.05 | 38.10 typ. | mm |
| WWF7B | 1.200 ± 0.062 | 0.312 ± 0.031 | 0.036 ± 0.002 | 1.500 typ. | inches |
| | 30.48 ± 1.57 | 7.92 ± 0.79 | 0.91 ± 0.05 | 38.10 typ. | mm |
| WWF10 | 1.780 ± 0.062 | 0.375 ± 0.031 | 0.036 ± 0.002 ⁽²⁾ | 1.500 typ. | inches |
| | 45.21 ± 1.57 | 9.53 ± 0.79 | 0.91 ± 0.05 ⁽²⁾ | 38.10 typ. | mm |


(1) See "Resistor Packaging Specification Document" for lead length dimension for tape and reel packaged product

(2) Available in 0.04" (1.02 mm)

| Performance Characteristics | |
|------------------------------------|---------------------------------------|
| Test | Test Specification |
| Fuse Test @ 220 Vac ⁽¹⁾ | Typically fuses in less than 1 second |
| Moisture Resistance | 1% max |
| Load Life | 1% |
| Temperature Cycling | 0.5% |
| Short Time Overload | 1% |

Note (1): Valid only if resistance value is low enough that the test voltage causes overload of 15X rated power or more.
Operating temperature range is -55°C to +350°C

Power Derating Curve:

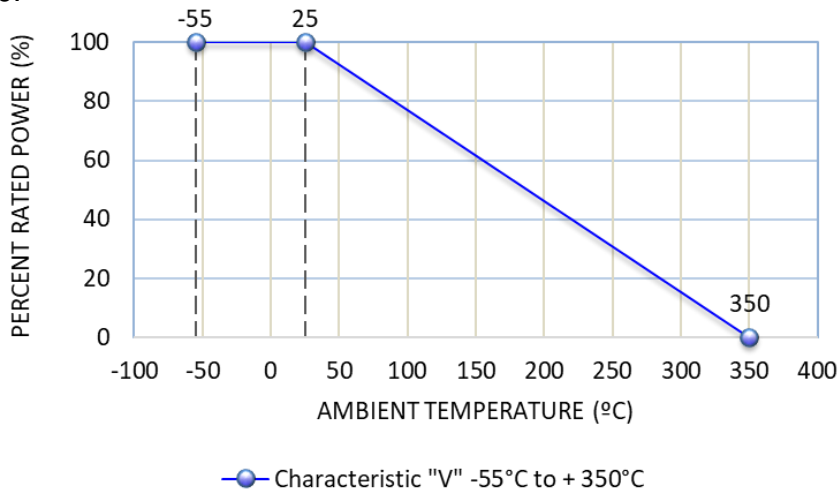

Recommended Solder Profile

This information is intended as a reference for solder profiles for Stackpole resistive components. These profiles should be compatible with most soldering processes. These are only recommendations. Actual numbers will depend on board density, geometry, packages used, etc., especially those cells labeled with “*”.


100% Matte Tin / RoHS Compliant Terminations

Soldering iron recommended temperatures: 330°C to 350°C with minimum duration.
Maximum number of reflow cycles: 3.

| Wave Soldering | | | |
|--------------------|------------|-------------|------------|
| Description | Maximum | Recommended | Minimum |
| Preheat Time | 80 seconds | 70 seconds | 60 seconds |
| Temperature Diff. | 140°C | 120°C | 100°C |
| Solder Temp. | 260°C | 250°C | 240°C |
| Dwell Time at Max. | 10 seconds | 5 seconds | * |
| Ramp DN (°C/sec) | N/A | N/A | N/A |

Temperature Diff. = Difference between final preheat stage and soldering stage.

| Convection IR Reflow | | | |
|----------------------|-------------|-------------|------------|
| Description | Maximum | Recommended | Minimum |
| Ramp Up (°C/sec) | 3°C/sec | 2°C/sec | * |
| Dwell Time > 217°C | 150 seconds | 90 seconds | 60 seconds |
| Solder Temp. | 260°C | 245°C | * |
| Dwell Time at Max. | 30 seconds | 15 seconds | 10 seconds |
| Ramp DN (°C/sec) | 6°C/sec | 3°C/sec | * |

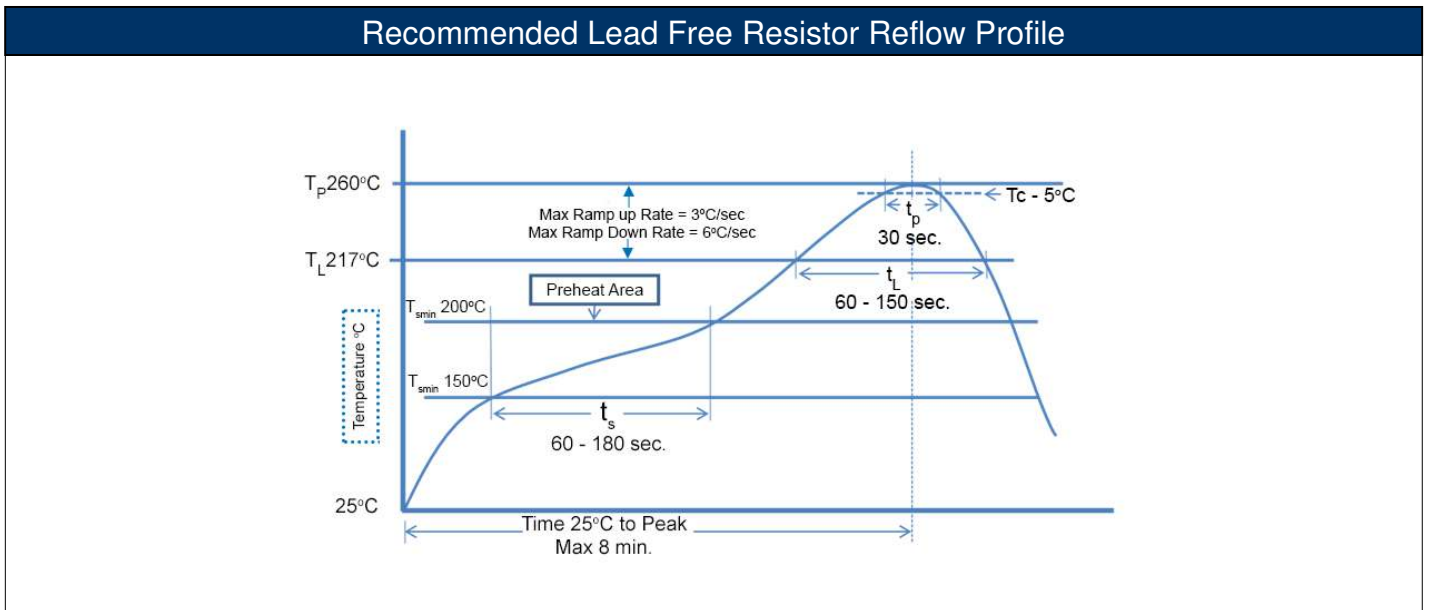

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status | | | | | | |
|-------------------------|---------------------------------------------------------|----------------------------|--------------------------------|-----------------------------------|----------------------------------------------------|---------------------------------------|
| Standard Product Series | Description | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| WWF | General Purpose and Precision Fusing Wirewound Resistor | Axial | YES | 100% Matte Sn | Always | Always |

"Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

