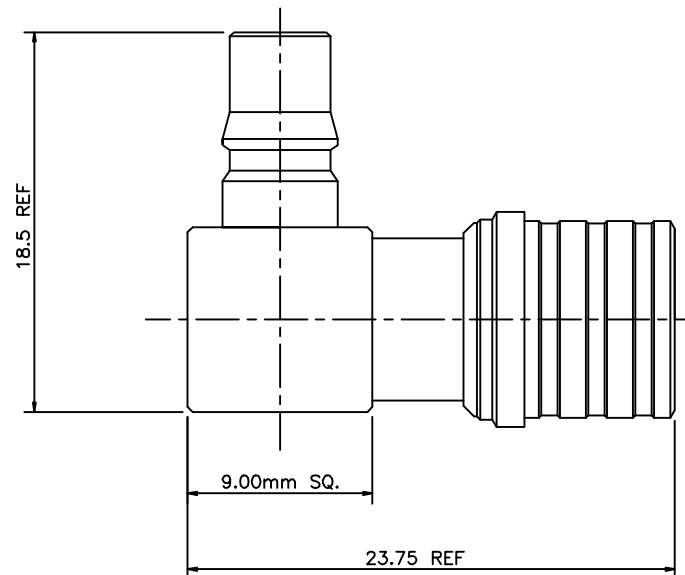


PART NO.

RQA-5402

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	JDM	3/27/15	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 VSWR: 1.3 MAX. @ 3GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V rms MIN.
 DURABILITY: 100 CYCLES MIN.
 TEMPERATURE RANGE: -65°C TO 165°C

#	DESCRIPTION	QTY	MATERIAL	FINISH
3	CONTACT	1	BeCu	Silver
2	INSULATOR	2	PTFE	
1	BODY	1	BRASS	White-Bronze

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
JDMc 3/25/15

CHECKED

ORJ DRAWN
JDMc 3/25/15

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

**QMA MALE TO FEMALE
 RIGHT ANGLE, ADAPTER**

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RQA-5402	-
SCALE: NTS		ENGINEERING ID: 00	SHEET 1 OF 1