
Ŧ	വ	н <b>п</b>	m	0





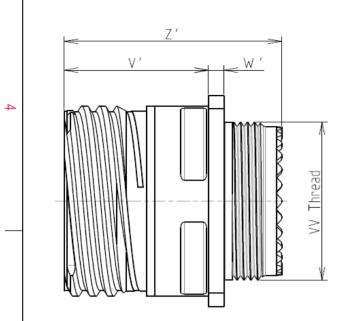

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	<sub>∶</sub> -65°C to +175°C		

: 2000 hours

8D 0

G

11

J

05

Н

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 11-05

CONTACT TYPE : PIN (1500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

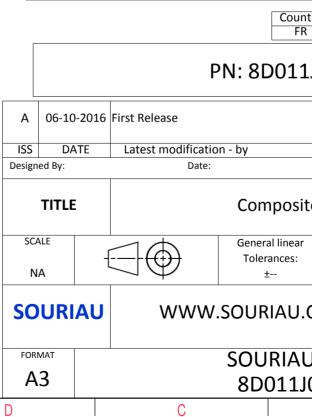

σ	1	А			
				4	
				3	
S EXAMPLE			_		
any non-conform which does not o of the Parties o idation, technical	comply with r by a third party notice.)				
Intry Juri R	sdiction & Contr Not Listed	ol List		2	
1J05HN	J05HN				
	CUSTOMER	DRAWING	MOD N°		
ite Recepta	e Receptacle 8D series				
ar	NPRDS / PROJECT				
	85 This docu	9 ment is the proper	ty of	1	
I.COM	COUDIALI				
	<b>D</b>		SHEET		
J05HN-C		A	1/2	J	
_	,				

r	τ	۵	н П	m		0	
		Contact Layout				Ρ	anel Cutou
4	-×	$ \begin{array}{c} & & & \\ & $			ň	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positi ID A B C D E Shell Arrangement Numl size no. cont	Non  X-axis (mm)  Y-axis (mm)    + 0.65 (1.65)  +.056 (1.42)    + 1.13 (2.87) 065 (1.65)    + 0.00 (0.00) 130 (3.30)   113 (2.87) 065 (1.65)   065 (1.65)  +.056 (1.42)    ber of  Size  Service  Contactt  Supersedes    tacts  contacts  rating  location  Supersedes			2		2 ØT_
ى	11 -5 5	5 20 I All MS20050-5				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pi the Specifications issued b (professional reco	roducts whi by either of
N						DNI · 8	Country FR D011J
					A 06-10-	2016 First Release	
					ISS DA Designed By:	TE Latest modification - by Date:	
					TITLE	Cor	mposite
<b>_</b>					SCALE NA	-{	eral linear erances: ±
					SOURI	WWW.SOU	RIAU.C
					FORMAT A3		JRIAU 011J0
	Н	G	F	E	D	С	

