

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 1
 Gauge: 26 AWG 0.14 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 7$
 Resistance at 20 °C: 150 Ω /km max

Insulator

Material: PVC
 Color: white
 Diameter: $\varnothing 1.35 \pm 0.10$ mm
 Nominal thickness: 0.40 mm
 Resistance at 20 °C: 10 M Ω /km min

Shield

Type: spiral
 Material: tinned copper strands
 Stranding: $\varnothing 0.1 \times 42$
 Coverage: 90% minimum


Outer jacket

Material: PVC
 Color: black
 Diameter: $\varnothing 2.45 \pm 0.15$ mm
 Nominal thickness: 0.45 mm

Wire marking: E339579 UL AWM STYLE 1185 26 AWG 80°C
 300V VW-1 --- cUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

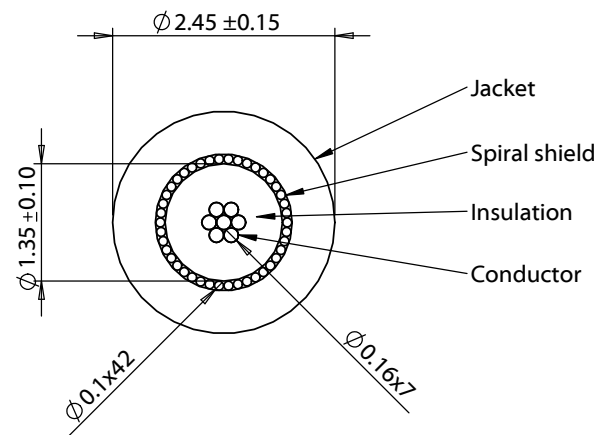

Revision:	Date:	Description:
A	06/24/2014	Initial release
A1	09/06/2018	Increased operating temperature range

Prepared: JP <small>Digitally signed by JP Date: 2018.09.06 15:54:47 -0700'</small>
Verified: PS <small>Digitally signed by PS Date: 2018.09.06 15:59:51 -0700'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 1C TS, 26 AWG, UL1185, 300V, 80C, 2.45 mm, shielded, VW-1, PVC

TENSILITY	
<small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>	
Size: A	Part number: 30-00347
Scale: 12:1	
Sheet 1 of 1	

5

4

3

2

1