

# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting



1162530

<https://www.phoenixcontact.com/us/products/1162530>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector, rear mounting, Power, 4-position, coding: T power , Rear mounting, Individual wires, cable length: 0.5 m, 1.31 mm<sup>2</sup>, UL/cUL stranded hook-up wire

## Your advantages

- For compact devices: transmit high power in a confined space
- Convenient field assembly: device connectors for fast on-site mounting
- Customer-specific assemblies and litz wire lengths available
- Standard pin assignments for signal and power transmission with a uniform design-in design

## Commercial data

Item number	1162530
Packing unit	1 pc
Minimum order quantity	50 pc
Sales key	AB27
Product key	ABQCEI
GTIN	4063151172565
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85444290
Country of origin	DE

# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting



1162530

<https://www.phoenixcontact.com/us/products/1162530>

## Technical data

### Notes

General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
---------	--

### Product properties

Product type	Contact insert
Sensor type	Power
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	T

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated voltage in acc. with IEC 61076-2-101	63 V
Rated surge voltage	1.5 kV
	6 kV AC
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage $U_N$	63 V
Nominal current $I_N$	12 A
Test voltage	1.5 kV

### Interfaces

Signal type/category	Power
----------------------	-------

### Signaling

Status display	No
Status display present	No

### Material specifications

Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6

# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting



1162530

<https://www.phoenixcontact.com/us/products/1162530>

Conductor material	Bare Cu litz wires
--------------------	--------------------

## Cable/line

Cable length	0.5 m
Cable type	UL/cUL stranded hook-up wire
Signal type/category	Power
Wire diameter incl. insulation	2 mm
Single wire, color	black, brown, blue, white
Conductor material	Bare Cu litz wires
AWG signal line	16
Material wire insulation	mPPE
Halogen-free	yes
Flame resistance	in acc. to UL 1581 VW1
Ambient temperature (operation)	-40 °C ... 105 °C (cable, fixed installation) -20 °C ... 105 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67 IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket) -20 °C ... 105 °C (Cable, flexible installation) -40 °C ... 105 °C (cable, fixed installation)

## Standards and regulations

Flame resistance	in acc. to UL 1581 VW1
------------------	------------------------

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111
Note	In line with

## Mounting

Mounting type	Rear mounting
Connection method	Individual wires


# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting

1162530

<https://www.phoenixcontact.com/us/products/1162530>


## Drawings

Schematic diagram

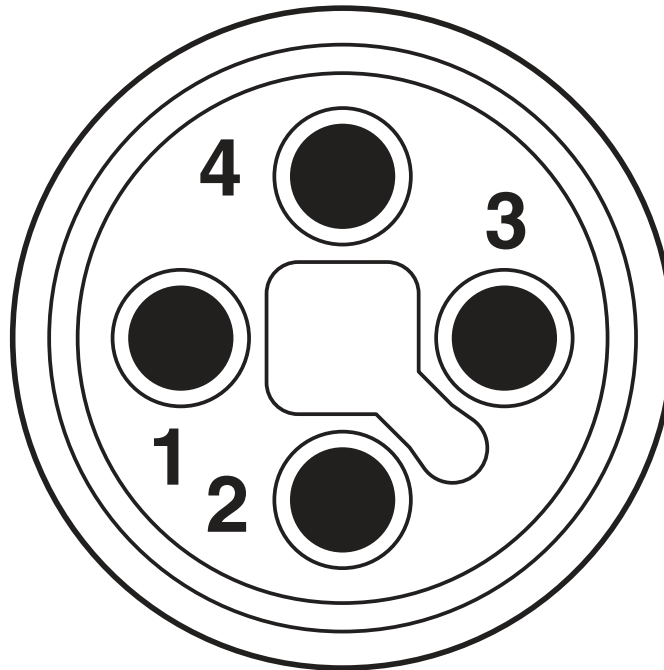

Pin assignment for M12 plug, 4-pos., T-coded, view of plug side

Circuit diagram

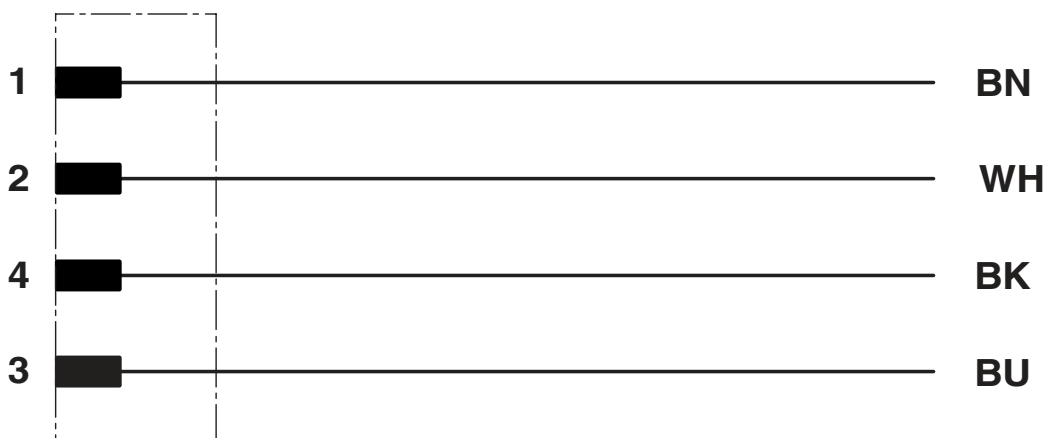

# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting



1162530

<https://www.phoenixcontact.com/us/products/1162530>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1162530>



**EAC**

Approval ID: B.01687



**cUL Recognized**

Approval ID: E468743-20190917

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	63 V	12 A	- 16	-



**UL Recognized**

Approval ID: E468743-20190917

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	63 V	12 A	- 16	-

**cULus Recognized**

# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting



1162530

<https://www.phoenixcontact.com/us/products/1162530>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 8.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting



1162530

<https://www.phoenixcontact.com/us/products/1162530>

## Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

# SACC-MCI-MST-4CON/1,0 SCO - Device connector, rear mounting



1162530

<https://www.phoenixcontact.com/us/products/1162530>

## Accessories

### SACC-MSQ-P-M12MS-25-2,7 SCO - Housing screw connection

1424131

<https://www.phoenixcontact.com/us/products/1424131>



Housing screw connection, Front mounting, square flange 25 mm side length,  
Square flange

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)