

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/6/20	

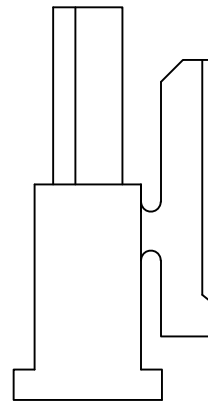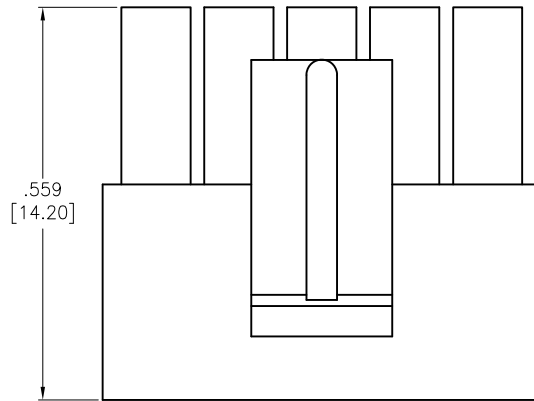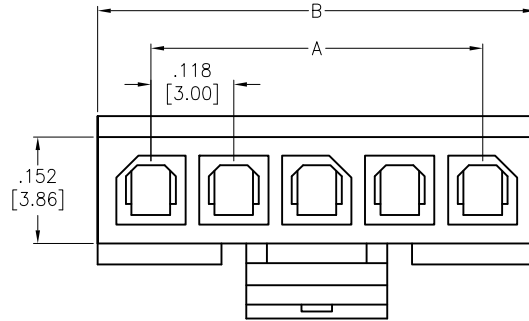

Positions: 02 thru 24

A = .118 [3.00] x No. of Space

B = .118 [3.00] x No. of Space + .157 [4.00]

SPECIFICATIONS:

Material:
 Insulator: Glass-Filled Polyimide, rated UL 94V-0
 Insulator color: Black

Electrical:
 Voltage rating: 250 V AC/DC
 Current rating: 5 A AC/DC
 Contact resistance: 10 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1500 VAC for 1 minute

Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	LH	3/6/20
CHECKED	AY1	3/6/20
APPROVED		

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE: **.118" [3.00mm] CRIMP HOUSING, SINGLE ROW
 LATCHING TYPE, HALOGEN-FREE**

SIZE X	PART NO. DMT-D-1-XX	REV. -
REF: S00015T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1