


**Product Features**

P1CA-29M29M-ST085-12 is an RF cable assembly that is part of P1dB's Tight-Flex™ cable assembly series. With a minimum bend radius of 0.2 inch, the cable allows bends at the connector end eliminating the need for a right angle connector. It is a 12 inch 2.92mm Male to 2.92mm Male cable assembly that utilizes ST085 Tight-Flex, triple shield coax, which is 0.104 inch (2.6 mm) diameter. The Tight-Flex™ cable assembly operates to 40 GHz with a max VSWR of 1.35:1. Max Insertion Loss at 40 GHz for this 12 inch assembly is 1.75 dB. RF shielding > 110 dB. Velocity of Propagation is 70 %.

Tight-Flex™ cable assemblies are a flexible version of RG405 semi-rigid and 085 conformable coax cables that meet RG405 dimensional and electrical specifications. Tight-Flex™ cable assemblies can operate up to 40 GHz, depending on the installed connectors. The advantage of Tight-Flex™ cables over other 085 flex cables is triple shield construction for great RF shielding and RF stability during tight bends.

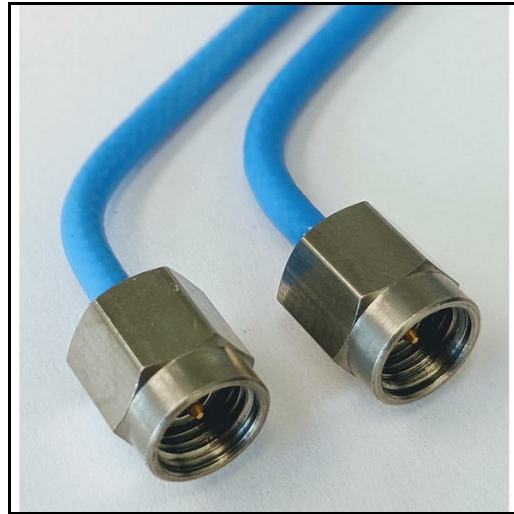


**Electrical Specification: T Ambient = 25° C**

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		40.0	

**Mechanical And Environmental Specifications:**

Parameter	Description	Notes
Connector 1	2.92mm Male	
Connector 2	2.92mm Male	
Coax Cable	Tight-Flex, Triple Shielded	
Cable Type	ST085	
Coax Diameter	0.104	
Length	12.0	
RoHS Compliance	Yes	

**Drawing**

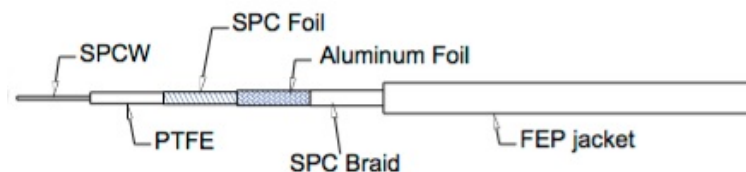

2.92mm Male to 2.92mm Male cable assembly using ST085 Tight-Flex, operating to 40 GHz, 12 inch long.

DIMENSIONS																																										
Center Conductor Diameter (inch)	0.0201																																									
(mm)	0.51																																									
Dielectric Diameter (inch)	0.0641																																									
(mm)	1.63																																									
Diameter Over Inner Foil (inch)	0.0708																																									
(mm)	1.80																																									
Diameter Over Outer Foil (inch)	0.0748																																									
(mm)	1.90																																									
Diameter over Braid (inch)	0.0885																																									
(mm)	2.25																																									
Jacket Diameter (inch)	0.104																																									
(mm)	2.64																																									
MATERIAL SPECIFICATIONS																																										
Jacket	FEP(BLUE)																																									
Braid	Round Silver Plated Copper																																									
Outer Foil	Aluminium Tape																																									
Inner Foil	Silver Plated Copper Tape																																									
Dielectric	Solid PTFE																																									
Center Conductor	Solid SPCW																																									
ELECTRICAL CHARACTERISTICS																																										
Impedance	50±2																																									
Capacitance (Nominal) (pF/ft)	29.4																																									
(pF/m)	96.4																																									
Velocity of Propagation (%)	70																																									
Cutt Off Frequency (GHz)	63																																									
Shielding Effectiveness	> -110dB																																									
Max. Attenuation Max Power (Watts)	<table border="1"> <thead> <tr> <th colspan="2">Attenuation</th> <th rowspan="2">Power</th> </tr> <tr> <th>dB/100Ft</th> <th>dB/100M</th> </tr> </thead> <tbody> <tr><td>400MHz</td><td>14</td><td>45.9</td></tr> <tr><td>1GHz</td><td>23</td><td>75.4</td></tr> <tr><td>3GHz</td><td>39</td><td>128</td></tr> <tr><td>5GHz</td><td>52</td><td>170.6</td></tr> <tr><td>10GHz</td><td>80</td><td>262.4</td></tr> <tr><td>18GHz</td><td>110</td><td>361</td></tr> <tr><td>25GHz</td><td>131</td><td>430</td></tr> <tr><td>30GHz</td><td>146</td><td>479</td></tr> <tr><td>35GHz</td><td>160</td><td>525</td></tr> <tr><td>40GHz</td><td>173</td><td>567</td></tr> <tr><td>45GHz</td><td>183</td><td>600</td></tr> <tr><td>50GHz</td><td>195</td><td>640</td></tr> </tbody> </table>	Attenuation		Power	dB/100Ft	dB/100M	400MHz	14	45.9	1GHz	23	75.4	3GHz	39	128	5GHz	52	170.6	10GHz	80	262.4	18GHz	110	361	25GHz	131	430	30GHz	146	479	35GHz	160	525	40GHz	173	567	45GHz	183	600	50GHz	195	640
Attenuation		Power																																								
dB/100Ft	dB/100M																																									
400MHz	14	45.9																																								
1GHz	23	75.4																																								
3GHz	39	128																																								
5GHz	52	170.6																																								
10GHz	80	262.4																																								
18GHz	110	361																																								
25GHz	131	430																																								
30GHz	146	479																																								
35GHz	160	525																																								
40GHz	173	567																																								
45GHz	183	600																																								
50GHz	195	640																																								

**Product Notes**

Temp range: -55 to +125 deg C

Minimum bend radius: 0.2 inch (5.1 mm)