


## SPECIFICATION CONTROL DRAWING

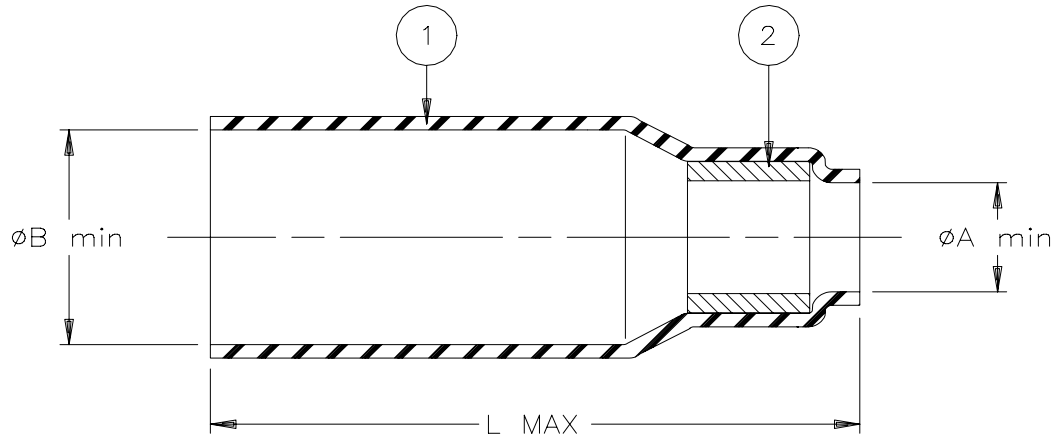

Product Revision		Product Dimensions		
Product Name		L max	A min	B min
D-436-0154	D	23.80 (0.935)	4.60 (0.180)	6.60 (0.260)

### MATERIAL

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
2. MELTABLE RING: Thermally stabilized thermoplastic. Color: transparent grey.

### APPLICATION

1. This part is designed to provide a strain relief for a coaxial or triaxial cable contact terminator. The maximum O.D. of the sleeve shall be 7.05 (.277) when installed on a cable having a jacket diameter of 6.5 (.257).
2. Temperature range: -55°C to +150°C.

<b>Raychem</b>		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: <b>SEALING SLEEVE</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.				DOCUMENT NO.: <b>D-436-0154</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D981323		REPLACES: D980267	
DRAWN BY: R. MAPALO	DATE: 08/12/98	REV.: SEE TABLE	DOC ISSUE: 4	SCALE: NONE	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision