


used for: D-SUB FILTER



NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
5. MOUNTING BRACKET: PBT GF UL 94 V-0, BLACK
6. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
7. PCB-SNAP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
8. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K111UA
9. CAPACITANCE: 1300pF $\pm 20\%$
10. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS

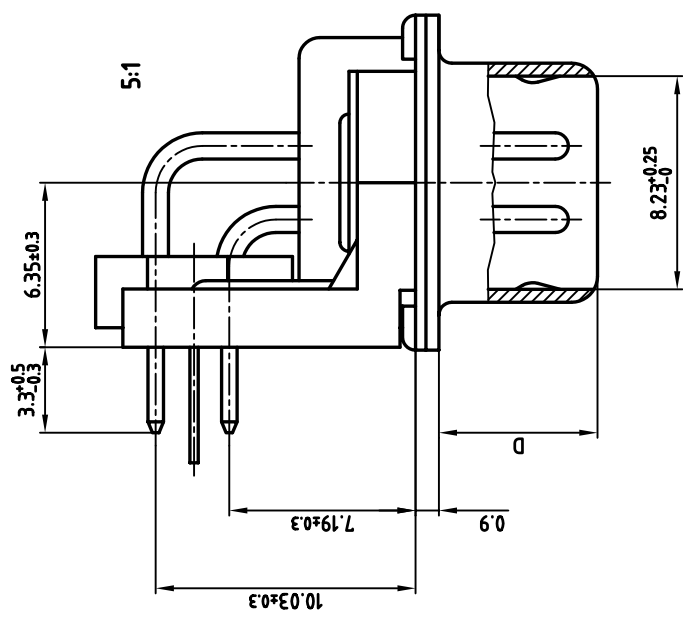

tolerance		scale: 2:1 (5:1)	
material:		SEE NOTES	
2001	date	title:	
drawn	02.07.	D-SUB FILTER MALE 90°	
appd.	02.07.	0.318inch 9-37pos.	
norm	DIN 41652	threaded insert, mounting bracket, clip, ferrit	
d-old		DIN-A	
rev. description		dwg no: 24K1A143A	
date		3	
name		sh: 1/1	
CONEC			
part no:		SEE TABLE	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

No. of pos.	A	B	C	D	Part NO.
9	31.19	16.79	25.00 ^{+0.12} _{-0.13}	6.12	241A29840X
15	39.52	25.12	33.30 ^{+0.15} _{-0.11}	6.12	
25	53.42	38.84	47.04 ^{+0.13}	5.99	
37	69.70	55.30	63.50 ^{+0.13}	5.99	

