




### Suggested Panel Cutout



### Surface Mount Version

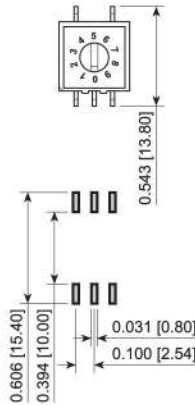

### Right Angle Version

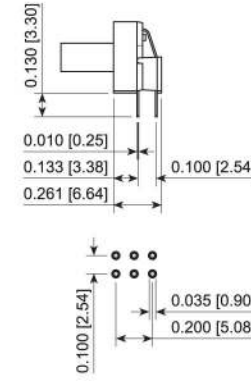

### FEATURES:


- Through Hole, Right Angle, and SMT Option
- Tape and Reel Packaging

### SPECIFICATIONS:


- RATING:** 25mA 24VDC (Switching)  
100mA 50VDC (Non-switching)
- TEMPERATURE:** -25°C to 80°C (Operating)  
-40°C to 85°C (Storage)
- ELECTRICAL LIFE:** 15,000 Cycles
- DIELECTRIC STRENGTH:** 250VAC for 1 Minute
- INSULATION RESISTANCE:** 100MΩ Min. at 250VDC
- CONTACT RESISTANCE:** 100mΩ Max.
- CAPACITANCE:** 5pF
- VIBRATION TEST:** Mil-Std-202F Method 201A
- SHOCK TEST:** Mil-Std-202F Method 213B
- OPERATION FORCE:** 200gf-cm

### MATERIALS:


- BASE:** Nylon, UL94 V-0
- COVER:** Nylon, UL94 V-0
- ACTUATOR:** Liquid Crystal Polymer, UL94 V-0
- CONTACTS:** Gold Over Nickel Plated Copper
- TERMINALS:** Gold Plated Brass

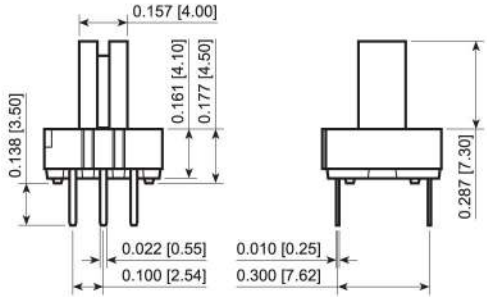


### Actuator Options

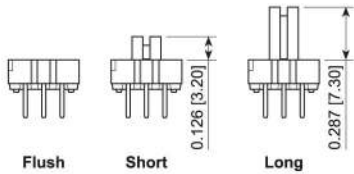

### Terminal Options

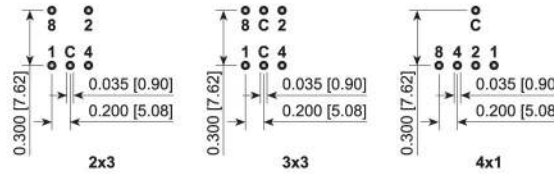

DR3MH-10R

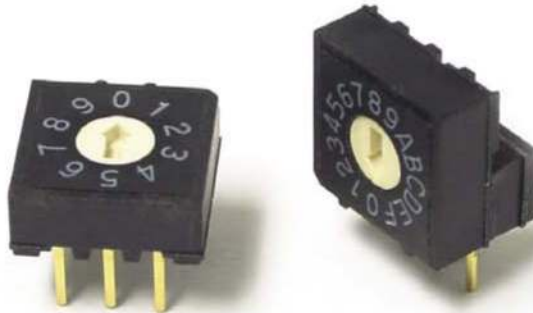


DR3-10R

DR4A-16R



DR2-10R

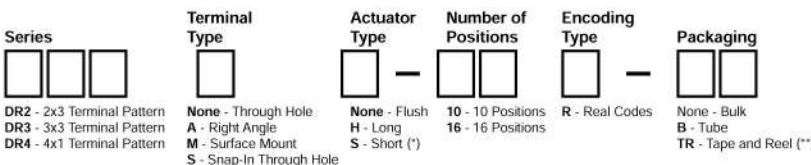

Notes:  
\* = Available with 3x3 Terminal Pattern Only.  
\*\* = Available with Surface Mount Terminals Only.

### EXAMPLE PART NUMBERS:

- DR2-10R 10 Position  
2x3, Through Hole, Flush, Real Code
- DR3-10R 10 Position  
3x3, Through Hole, Flush, Real Code
- DR3-16R 16 Position  
3x3, Through Hole, Flush, Real Code
- DR3A-10R 10 Position  
3x3, Right Angle, Flush, Real Code
- DR3AH-10R 10 Position  
3x3, Right Angle, Long, Real Code
- DR3H-10R 10 Position  
3x3, Through Hole, Long, Real Code
- DR3H-16R 16 Position  
3x3, Through Hole, Long, Real Code
- DR3M-10R 10 Position  
3x3, SMT, Flush Actuator, Real Code