



Electrical Specifications

Center Frequency: 80 MHz
Insertion Loss: 3.0 dB Max
Return Loss: 15 dB Min
Rejection: >30 dB @ 0-70 MHz
>30 dB @ 90-1000 MHz


Mechanical

Connector Type: SMA (F)
Dimensions: 2.50 x 1.125 x 0.75 Inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

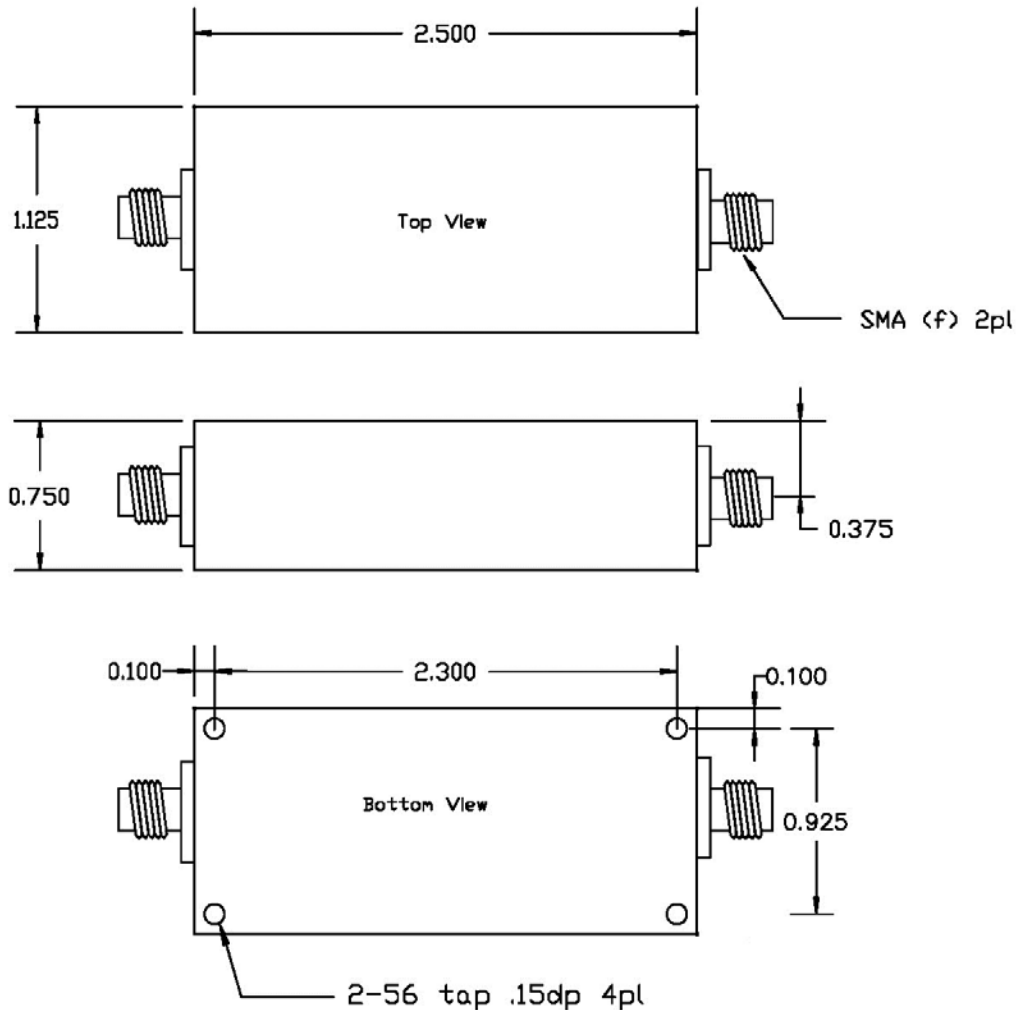



Response Plot:

