1-776163-4 - ACTIVE

AMP | AMPSEAL TE Internal #: 1-776163-4 PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Sealable, AMPSEAL

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > AMPSEAL PCB Horizontal Headers



Connector System: Wire-to-Board Number of Positions: 35 Centerline (Pitch): 4 mm [.157 in] Sealable: Yes PCB Mount Orientation: Right Angle

All AMPSEAL PCB Horizontal Headers (55)

Features

Product Type Features

Connector Shape

Rectangular



PCB Connector Assembly Type	PCB Mount Header			
Header Type	Fully Shrouded			
Connector System	Wire-to-Board			
Sealable	Yes			
Connector & Contact Terminates To	Printed Circuit Board			
Configuration Features				
Number of Positions	35			
PCB Mount Orientation	Right Angle			
Number of Rows	3			
Body Features				
Primary Product Color	Gray			
Contact Features				
Contact Type	Pin			
Contact Mating Area Plating Material	Gold			
Contact Current Rating (Max)	17 A			

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Sealable, AMPSEAL



Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder			
Mechanical Attachment				
Mating Alignment	With			
PCB Mount Alignment	With			
PCB Mount Retention	With			
Connector Mounting Type	Fixing Screw			
Housing Features				
Centerline (Pitch)	4 mm[.157 in]			
Usage Conditions				
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]			
Operation/Application				
Circuit Application	Power & Signal			
Industry Standards				
Degree of Protection	IP6K7, IP6K9K			
UL Flammability Rating	UL 94V-0			

Packaging Features

Packaging Type

Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Sealable, AMPSEAL



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

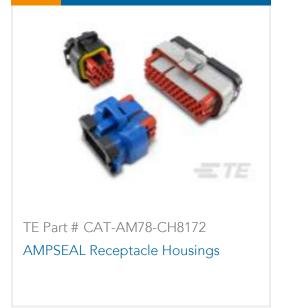

Also in the Series | AMPSEAL










Automotive Connector Caps & Covers (5)	Automotive Connector Locks & Position Assurance(1)	Automotive Housings(31)	Automotive Seals & Cavity Plugs(1)



Customers Also Bought

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Sealable, AMPSEAL



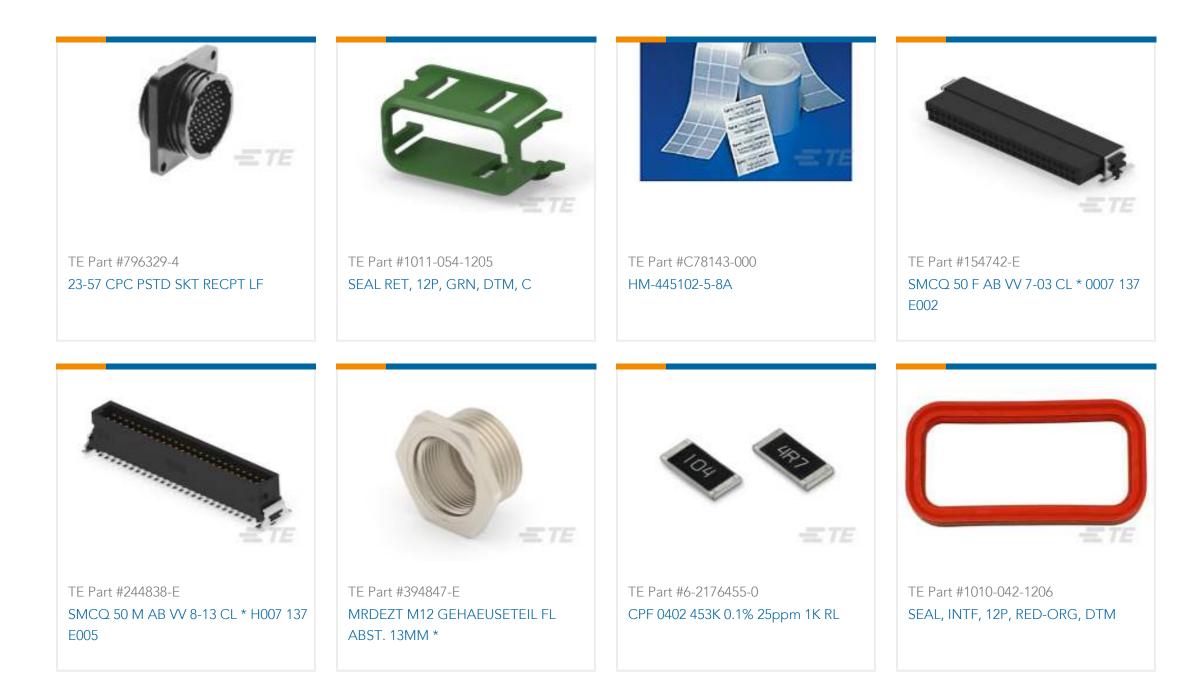

Documents

Product Drawings 35POS,AMPSEAL,PIN HSG ASSY,SLD,COD 4

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-776163-4_S.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-776163-4_S.3d_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_1-776163-4_S.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

Product Specifications

Application Specification

English

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Sealable, AMPSEAL



Agency Approvals UL Report

English