



DUAL CELLULAR / DUAL WI-FI
MOBILE ACCESS ROUTER



Manage this device with
Digi Remote Manager

DIGI TX54

Rugged and secure cellular router for mission critical industrial and transportation applications, including models for public safety networks

The versatility and performance of Digi TX54 routers make them ideal for mission critical applications requiring continuous connectivity, field longevity and edge computing. Digi TX54 provides secure routing and gateway functionality across wired and wireless communication networks. Local private subnets are bridged across public networks to safeguard privacy and integrity.

Digi TX54 is available with dual Wi-Fi radios to segment passenger Wi-Fi from fare collection, data, video and other applications, and offers models with both single and dual LTE-Advanced or LTE-Advanced Pro cellular modules.


Designed to meet the demands of first responders, Digi TX54 includes concurrent and independent dual cellular interfaces that prioritize critical communications. The industrial-grade design supports the most rugged conditions, including vibration and temperature changes. A Python development environment allows for edge computing and intelligence.

Four Gigabit Ethernet ports connect other IP-capable systems, each configurable as an isolated secure LAN, or all four can function as a Layer 2 switch. Digi TrustFence®, a suite of hardware and firmware features, ensures the integrity of Digi TX54 security functions. Chip-level encryption protects the onboard file system.

FEATURES AND BENEFITS

- Global models are available in both single and dual cellular options
- Future-built with dual-core 880 MHz MIPS processor and PCIe 2.0 internal bus
- Capable of segmenting private and public data communication across dual 600 Mbps LTE-Advanced Cat 11 or LTE-Advanced Pro Cat 12 cellular modules
- High-speed 867 Mbps 802.11ac Wi-Fi for WAN or LAN service and optional dual Wi-Fi radios
- Cryptographic co-processor with secure key generation
- Securely deploy, monitor and control devices with Digi Remote Manager®

APPLICATION EXAMPLE

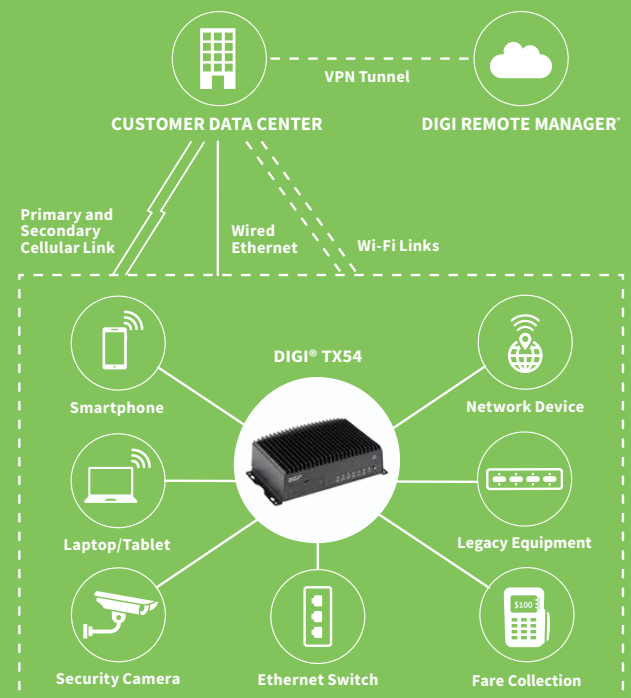

RELATED PRODUCTS



Digi TX64



Digi WR44 RR



Digi WR31



Accessories



Digi Remote Manager®

SPECIFICATIONS

DIGI TX54


| | |
|--|--|
| CELLULAR | |
| LTE-ADVANCED WORLDWIDE | LTE FDD: B1 (2100), B2 (1900), B3 (1800), B4 (1700AWS), B5 (850), B7 (2600), B8 (900), B12 (700ac), B13 (700c), B17 (700), B20 (800DD), B25 (1900), B26 (850), B28 (700 APAC), B29 (700), B30 (2300 Rx only), B66 (1700AWS); LTE TDD: B38 (2600), B40 (2300), B41 (2500); 3G HSPA+: B1 (2100), B2 (1900), B4 (1700AWS), B5 (850), B8 (900); Transfer rate (max): 600 Mbps down, 75 Mbps up (Cat 11) |
| LTE-ADVANCED PRO UNITED STATES / CANADA | LTE FDD: B1 (2100), B2 (1900), B3 (1800), B4 (1700AWS), B5 (850), B7 (2600), B8 (900), B9 (1800), B12 (700ac), B13 (700c), B14 (700PS), B18 (850), B19 (800), B20 (800DD), B26 (US 850 Ext), B29 (US 700de Lower), B30 (2300), B32 (1500), B48 (3600), B66 (AWS-3); LTE TDD: B41 (2500), B42 (3500), B43 (3600), B46 (5200); 3G HSPA: B1 (2100), B2 (1900), B4 (1700AWS), B5 (850), B6 (800), B8 (900), B9 (1700), B19 (800); Transfer rate (max): 600 Mbps down, 150 Mbps up (Cat 12) |
| CONNECTOR | Single cellular models: (2) 50 Ω SMA (center pin: female) Dual cellular models: (4) 50 Ω SMA (center pin: female) |
| SIM SLOTS | Single cellular models: (2) Mini-SIM (2FF) Dual cellular models: (4) Mini-SIM (2FF) |
| SIM SECURITY | Screw-down SIM cover |
| WI-FI | |
| MODULE | 2 x 2 MIMO 2.4/5 GHz 802.11 a/b/g/n/ac, 867 Mbps (max); dual Wi-Fi modules in TX54-A112 |
| HOTSPOT | Captive portal, customizable splash page |
| AUTHENTICATION | Basic ToS acceptance, enterprise RADIUS |
| THIRD-PARTY SERVICES | Content filtering, embedded advertising |
| MODES | Up to 4 access points and 1 client per Wi-Fi module (8+2 total) |
| SECURITY | WPA/WPA2-personal, WPA/WPA2-enterprise |
| CONNECTORS | 2 x 50 Ω RP-SMA (center pin: male) |
| GPS | |
| TECHNOLOGY | Multi-constellation: concurrent reception of up to 3 GNSS (GPS, Galileo, GLONASS, BeiDou) |
| SENSITIVITY | -163 dB |
| PROTOCOL | Protocol NMEA 0183 V2.3 sentence output |
| CONNECTOR | 1 x 50 Ω SMA (center pin: female); +3.3 VDC active antenna drive |
| ETHERNET | |
| PORTS | (4) RJ-45; 10/100/1000 Mbps (auto-sensing) |
| SERIAL | |
| PORTS | (1) DB9-M; RS-232 DTE ; Signal support TXD, RXD, RTS, CTS, DTR, DCD, DSR, RI software (XON/XOFF), hardware supported |
| USB | |
| PORTS | (1) USB 3.0 Type A connector |
| PHYSICAL | |
| DIMENSIONS (L X W X H) | 14.61 cm x 20.95 cm x 6.35 cm (5.75 in x 8.25 in x 2.5 in) |
| WEIGHT | 1.5 kg (3.3 lbs) |
| STATUS LEDS | Power on, WWAN signal strength, WWAN service |
| ENCLOSURE | Die-cast aluminium / IP54 |
| POWER REQUIREMENTS | |
| POWER INPUT | 9 - 36 VDC, 30 W minimum power source required |
| POWER CONSUMPTION | 13 W typical (idle); 20 W typical (peak Tx/Rx) |
| ENVIRONMENTAL | |
| MOUNTING OPTIONS | Flexible mounting options |
| OPERATING TEMPERATURE | -34° C to 74° C (-29° F to 165° F) |
| STORAGE TEMPERATURE | -40° C to 85° C (-40° F to 185° F) |
| RELATIVE HUMIDITY | 5% to 95% (non-condensing) |
| APPROVALS | |
| CELLULAR | PTCRB, AT&T, OnGo, Sprint, Verizon, Anatel; see part numbers for more details on certifications on each SKU |
| SAFETY | EN60950, EN62368 |
| VEHICLE | ISO 7637-2/3, ISO 10605, ISO 16750-2 Pulses 4/5a/5b, SAE J1113, E-Mark |
| RAIL | EN50155, EN45545-2, EN50121-3-2 |
| ENVIRONMENTAL | MIL-STD-810G (temperature, humidity, vibration, shock, dust) |
| EMISSIONS/IMMUNITY | CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032 |
| WARRANTY | |
| PRODUCT WARRANTY | 3-year |

*Transfer rates are network operator dependent

| ENTERPRISE SOFTWARE | DESCRIPTION |
|--|--|
| PROTOCOL SUPPORT | HTTP, HTTPS, FTP client, SSL, TLS v1.2, SCP (client and server), SFTP, SMTP client for use by scripts and the command line, SNMP (v2/v3), SSH; remote management via Digi Remote Manager®; Protocol analyzer, ability to capture PCAP for use with Wireshark; DynDNS; Dynamic DNS client compatible with BIND9/No-IP/DynDNS; Captive portal, Intelliflow; X.509 certificate management; Dead Reckoning |
| SECURITY | IP filtering, stateful firewall, custom firewall rules (iptables), address and port translation; SSL, SSLv2, SSLv3; Authentication: RADIUS, TACACS+; certificates; MAC address filtering; VLAN support |
| VPN | IPSec with IKEv1, IKEv2, NAT Traversal; OpenVPN client and server; GRE VPN tunnels; Cryptology: SHA-1/256/384/512, MD5, RSA; Encryption: 3DES and AES up to 256-bit (CBC mode for IPsec); Diffie Hellman: DH groups 1-32 (CURVE448) |
| ROUTING/FAILOVER | IP pass-through; NAT, NAPT with IP port forwarding; Ethernet bridging; GRE; Multicast routing; Routing protocols: RIP (v1, v2) OSPF, BGP; IP failover: VRRP; automatic failover, Digi SureLink® |
| OTHER PROTOCOLS | DHCP; Dynamic DNS client compatible with No-IP/DynDNS; Nagios, DNS server, NTP server, Multicast, mDNS, IPPerf |
| LOCAL MANAGEMENT | Web interface (HTTP/HTTPS); CLI (SSH, serial port) |
| MANAGEMENT / TROUBLESHOOTING PROTOCOLS | Protocol analyzer with PCAP for Wireshark, event and system logging (with Syslog), accessible from Digi Remote Manager, SFTP or SCP |
| PROGRAMMING TOOLS / ENVIRONMENTS | Python v3.6.4 |

PRODUCT IMAGES

FRONT

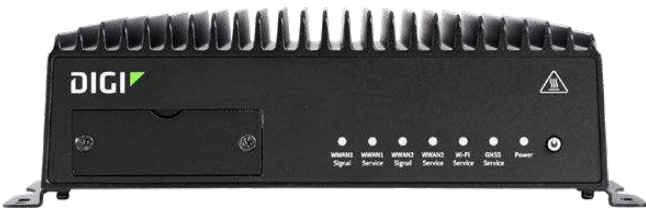

BACK



POWER SUPPLY*



ACCESSORY KIT*





CAPABILITIES

- Centralized management of remote devices over 3G/4G/LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Get alerts and create reports on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Complete tasks for your entire device network in minutes
- Edit configurations and update firmware for individual devices or groups
- Monitor the status and location of remote devices via a web browser
- Activate or deactivate cellular lines and monitor data to ensure you never incur overage charges

INFRASTRUCTURE

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development

SECURITY

- Certified SSAE-16 facilities
- Over 175 security controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST
- Earned SkyHigh's Cloud Trust Program highest rating of Enterprise-Ready

| PART NUMBERS | DIGI TX54 |
|--------------|--|
| TX54-A106 | Digi TX54 single LTE-Advanced Cat 11, Wi-Fi, worldwide, Anatel |
| TX54-A112 | Digi TX54 single LTE-Advanced Cat 11, dual Wi-Fi, worldwide |
| TX54-A206 | Digi TX54 dual LTE-Advanced Cat 11, Wi-Fi, worldwide, Anatel |
| TX54-A146 | Digi TX54 single LTE-Advanced Pro Cat 12, Wi-Fi, North America, CBRS, Sprint |
| TX54-A246 | Digi TX54 dual LTE-Advanced Pro Cat 12, Wi-Fi, North America, CBRS, Sprint |

| PART NUMBERS | ACCESSORIES* |
|--------------|---|
| 76002084 | Digi TX54 accessory kit - single cellular |
| 76002085 | Digi TX54 accessory kit - dual cellular |
| 76002086 | Digi TX54 accessory kit - dual Wi-Fi |
| 76002076 | Digi TX54 power supply |

*Sold separately, unless otherwise noted.

FOR MORE INFORMATION
PLEASE VISIT DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2020 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91004362
B1/420

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

