


| REV. | DATE     | DESCRIPTION                            |
|------|----------|--|
| A    | 01/13/99 | ADD CRIMP NOTES / CHANGE FERRULE DIMS. |

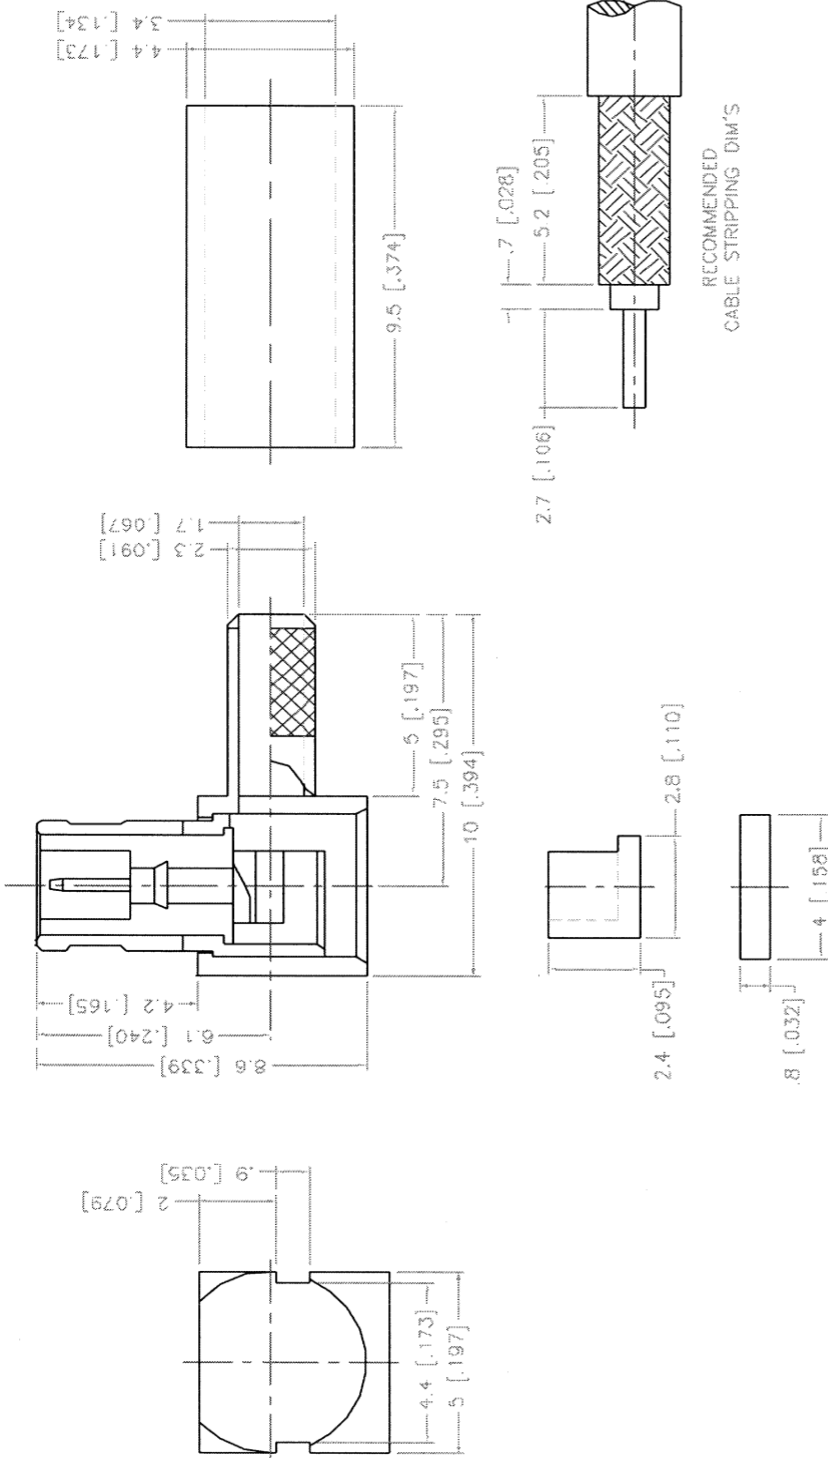

RECOMMENDED  
CABLE STRIPPING DIM'S

NOTE:

- USE .151 HEX CRIMP DIE TO TERMINATE FERRULE TO CABLE.
- CONNEX TOOL 47-10160
- IDEAL TOOL 36-489

|               |             |         |  |              |          |
|---------------|-------------|---------|--|--------------|----------|
| DESCRIPTION   | MATERIAL    | FINISH  | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN ( ) ARE IN INCHES FOR CUSTOMER REFERENCE ONLY | APPROVALS    | DATE     |
| 1 HOUSING     | BRASS       | NICKEL  | 0.5-6 = ± 0.2<br>6-30 = ± 0.4<br>30-120 = ± 0.6<br>120-315 = ± 1<br>315-1000 = ± 1.6<br>1000-2000 = ± 2.4            | DRAWN G.R.S. | 01/13/99 |
| 2 BODY        | BER. COPPER | NICKEL  | ISSUED   | CHECKED      |          |
| 3 INSULATOR-1 | TEFLON      | NATURAL | DO NOT SCALE DRAWING   |              |          |
| 4 CONTACT PIN | BRASS       | GOLD    |  |              |          |
| 5 INSULATOR-2 | DELIN       | NATURAL |  |              |          |
| 6 COVER       | BRASS       | NICKEL  |  |              |          |
| 7 FERRULE     | COPPER      | NICKEL  |  |              |          |
| 8             |             |         |  |              |          |



MCX R/A CRIMP PLUG

TITLE RG 174/u, 316/u DOUBLE BRAIDED CABLE

|      |          |            |      |
|------|----------|------------|------|
| SIZE | FSCM NO. | DWG. NO.   | REV. |
| A    | 99001    | 252118.DWG | A    |

|       |          |        |
|-------|----------|--------|
| SCALE | PART NO. | SHEET  |
| NA    | 252118   | 1 OF 1 |