

6

5

4

3


2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/18	

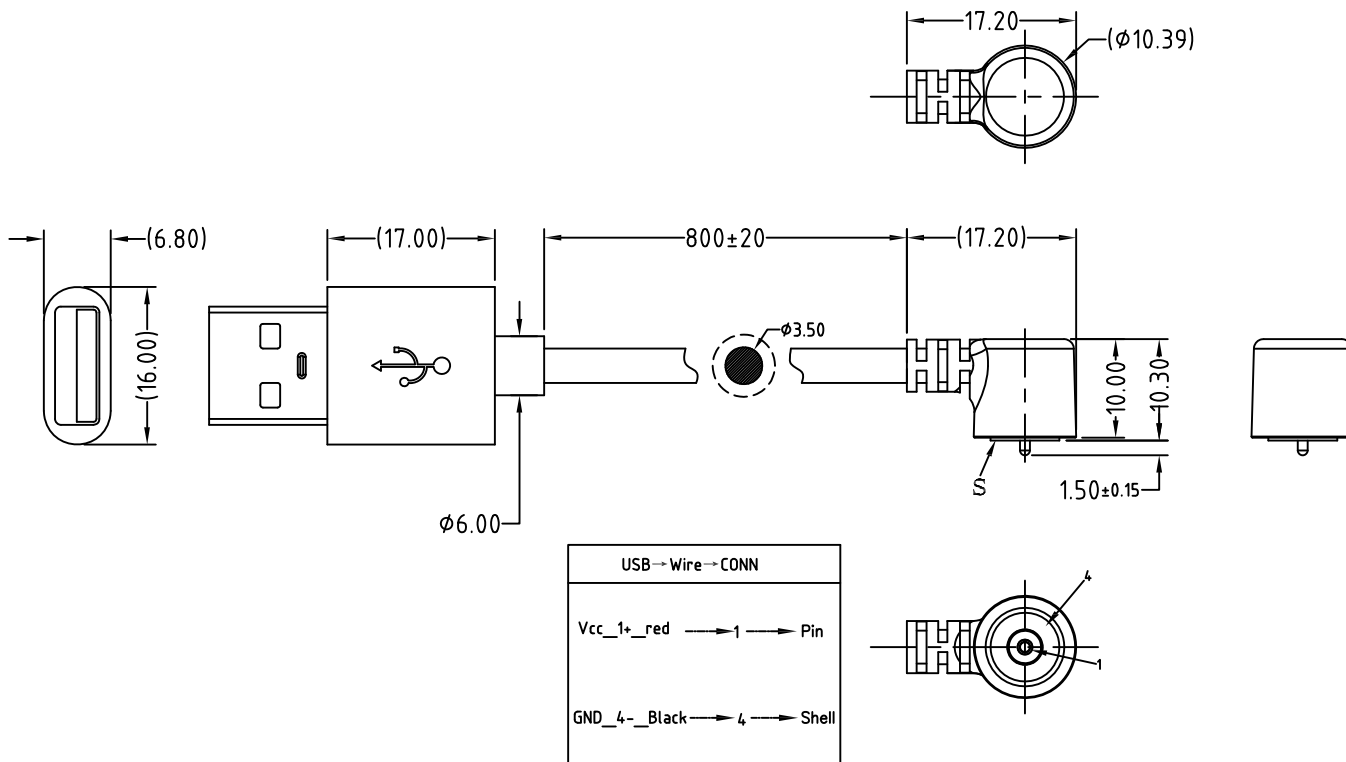

SPECIFICATIONS:

Connector:

P1 = USB Type-A Male, Insulator Color: Black, Contact: Gold flash plated  
Overmold Color: Black, 45P PVC

P2 = Circular POGO Pin connector Male, Right angle, Overmold Color: Black, 45P PVC

Cable:

22AWG, 2C, O.D: .138" [3.5mm], Jacket Color: Black, PVC 55P

Electrical:

Rated Current & Voltage: 12VDC, 3A

Contact resistance: 50 mohms max

Mechanical:

Contact force: 80±20g @ 1.10mm working stroke

Full stroke: 1.60mm

Durability: 100,000 Cycles

Electrical Test:

All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant.



Mating with: PHR-C4777-02-FVP-800

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b>		909 Rahway Avenue, Union, NJ 07083	
Millimeters		<b>INTERCONNECTS</b>		Phone: 908-687-5000	
0~6	± 0.10			Fax: 908-687-5710	
6~30	± 0.20				
30~150	± 0.30				
APPROVALS		DATE		TITLE	
DRAWN	HR	11/12/18		POGO PIN CHARGING CABLE, MALE, R/A	
CHECKED	CK	11/12/18			
APPROVED					
SIZE	PART NO.	REV.			
X	CA-RA2-PHR-15103-M	-			
REF:	S00170C	SCALE:	NTS	SHEET 1 OF 1	

6

5

4

3

2

1